



Duckworth & Kent



Reusable Titanium  
Ophthalmic Instruments



# Duckworth & Kent

Duckworth & Kent is a world leader in titanium ophthalmic surgical instrumentation, manufacturing our product range at our headquarters in England. Innovation and experimentation have been at the heart of the company's philosophy for over half a century, driven by the uncompromising quest for perfection. The company's enduring commitment to exceptional engineering is best exemplified by our latest range of instrumentation.

With increasing technological challenges and demanding customer expectations, the value of innovative design and advance manufacturing is stronger now than ever before. By exploring advanced concepts and embracing new technology, Duckworth & Kent remains at the forefront of ophthalmic surgical instrumentation design and engineering.

All schematic line drawings, photographs and copy in this catalogue are fully protected by copyright. No part of this catalogue may be reproduced in any form without written permission of Duckworth & Kent Ltd. Duckworth & Kent Ltd., reserves the right to make changes at any time, without notice, in product specification and availability. Schematic line drawings and photos may vary from actual size. Tip drawings are shown enlarged. Descriptive, typographic, or photographic errors are subject to correction. Name(-s) of instruments are often comprised of a surgeon's name, combination of surgeons' names or DK's name along with the category of the instrument. Arrow indicates view at point.

D&K® is a registered trademark of Duckworth & Kent Ltd. All other brand names are trademarks or registered trademarks of their respective owners.

## Stay in touch with Duckworth & Kent

For further information on our current range of ophthalmic instrumentation and services, visit our website or contact us directly.



Website

Duckworth & Kent Ltd.  
Terence House  
7 Marquis Business Centre  
Royston Road, Baldock  
Herts, SG7 6XL, England

T +44 (0) 1462 893254  
F +44 (0) 1462 896288

[info@duckworth-and-kent.co.uk](mailto:info@duckworth-and-kent.co.uk)

[www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

Find us here



### Colour Key

	E-Range Instrument
	Core Values Collection
	Essential Cataract Set
	Multiple Ranges

# | Contents |

1	Scissors	11-20
2	Forceps	21-64
3	Needle Holders	65-70
4/5	Diamond Knives	71-80
6	Hooks, Probes, Manipulators and Miscellaneous	81-116
7	Punches and Inserters	117-120
8	Irrigation and Aspiration	121-134
9	Fixation Rings, Gauges, Markers and Specula	135-164
DK	IOL Loading and Delivery Systems	165-172
T	Sterilising Trays	173-178
In	Index	Numeric 179-186 Alphabetical 187-199

# Find it Quickly

Hundreds of instruments  
Search our whole range in seconds  
Find us at [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)



## Website

### Finding the Right Instrument

All of our products can be found online via our website [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com). Each product has a photograph, tip view/views and a list of essential information to make sure you are fully informed on the instrument's dimensions and capabilities before making your purchase.


### Three Ways to Search

- By selecting the products tab and browsing our online catalogue.
- Through the search bar, by typing in either the product number/instrument name or keyword.
- By going to the online version of our printed catalogue which you can find by selecting Literature & Media located on the main menu.

### Request a Quote

Our product quote form is quick and simple. Browse our products and add them to your quote list. To review and amend your list, select quote from the main menu.

Once you have selected your instruments and quantities, fill out your contact details and select 'Request a Quote'. Our customer service team will get back to you.

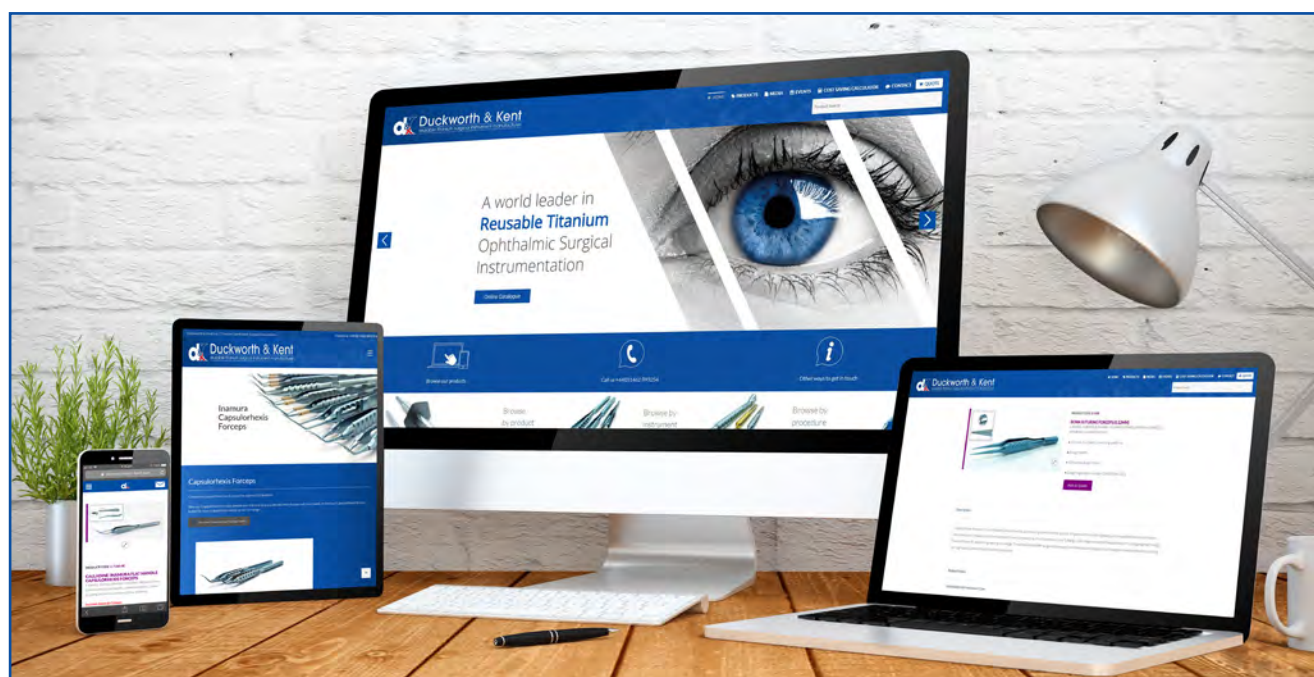

# Receive it Quickly

Our dedicated customer service team are always happy to help



## Contact Us Direct

---

If you would prefer to call or e-mail us directly to enquire about an instrument or place an order, please feel free to contact our customer service team. After receiving your enquiry we will respond quickly via email with all the relevant information that you have requested.

---

### Office Hours

Monday - Thursday 8:30am - 5:00pm  
Friday 8.30am - 4.30pm

### Telephone

+44 (0)1462 893254

### E-mail

info@duckworth-and-kent.co.uk

## Delivery

We have experience shipping worldwide. We hold an extensive range of instruments in stock to facilitate a fast turnaround. We aim to ship within 2 weeks of receiving your order.

---

## Repairs

We offer a fast turnaround to repair and service our own hand held surgical instruments, including diamond knives.

---

We always provide a quality, professional service utilising our technologically advanced in-house facilities.

We aim to achieve a fast and efficient turnaround.

D&K instruments are repaired by highly skilled craftsmen, ensuring that any small imperfections are not overlooked.

We repair all Duckworth & Kent ophthalmic surgical instruments, including diamond knives.

Before we carry out any work or repairs on any instrument we will require proof that the instrument has been decontaminated.

If you are unable to provide the relevant documentation / certificate to confirm decontamination and you are aware that this process has been carried out, then please visit:

[www.duckworth-and-kent.com/instrument-repair](http://www.duckworth-and-kent.com/instrument-repair)

# Why Titanium ?

Traditionally hand held surgical instruments have been made from stainless steel. In the 1960s, the aerospace industry embraced the benefits of titanium alloy and in the 1970s a metallurgist advised the owner of Duckworth & Kent to consider titanium alloy (Ti 6Al-4V). Duckworth & Kent saw the advantages of working with this modern metal and moved away from manufacturing in steel. The new material proved to be very well suited to the requirements for surgical instrumentation, offering advantages such as no oxidation, non-magnetic, lightweight and yet extremely durable. The new metal required new techniques in manufacturing and Duckworth & Kent began to learn how to work with titanium alloy. Duckworth & Kent soon became a specialist in titanium manufacturing, pushing the metal to its limits to produce some of the finest, delicate and precise medical devices. Today Duckworth & Kent is regarded as one of the pioneers in titanium medical devices and a world specialist in manufacturing from titanium.

## Benefits of Titanium to the Surgeon

- Titanium's lightness is an advantage to the surgeon when handling instruments.
- Instruments are anodised to provide a non-reflecting surface, invaluable in microsurgical operations.
- Titanium can withstand repeat sterilisation without compromising on strength, edge or surface quality. It is also corrosion resistant.
- Titanium is non-magnetic and therefore does not cause adverse reactions with other steel instruments or equipment.

## PEEK

PEEK™ (PolyEtherEtherKetone) polymer was invented by ICI, (Imperial Chemical Industries), in November 1978.

Since its introduction, Victrex® PEEK™ polymer has been the material of choice for applications requiring outstanding resistance to chemicals, heat, steam, radiation, and wear.

Combining superior strength, stiffness and impact resistance, Victrex® PEEK™ polymer has long been the standard for medical devices requiring aggressive sterilization methods used in hospitals and laboratories around the world.

Due to its semi-crystalline nature, Victrex® PEEK™ polymer maintains its mechanical and chemical properties past 2,500 hours in high pressure steam. It has outstanding stability upon exposure to radiation and will withstand virtually every chemical with the exception of extremely strong oxidizing acids.

With its unparalleled combination of high performance properties, Victrex® PEEK™ polymer continues to revolutionize the medical device industry in applications where the use of plastics was previously thought to be impossible.

---

Victrex™ is a registered trademark of Victrex manufacturing Ltd.  
PEEK® is a trademark of Victrex plc.

# Brief History of Duckworth & Kent

## Foundation of Duckworth & Kent Ltd.

Duckworth & Kent was founded on the 30th January 1959 as a small engineering company in the town of Hitchin, England. Shortly afterwards the company moved to the neighbouring town of Baldock, where it has remained to the present day. During the 1960s Duckworth & Kent was primarily involved in high-precision contract engineering work for the UK Ministry of Defence.

## Introduction to Ophthalmic Surgery

In 1968 a London-based Consultant Eye Surgeon approached the company regarding its assistance in the manufacture of surgical instruments for cataract operations. This new development within the company remained relatively small scale until 1972. Following a meeting with a metallurgist, the company was advised to consider titanium alloy as the raw material, as used in the aerospace industry. It wasn't long before Duckworth & Kent saw the substantial advantages of this material and moved away from manufacturing surgical instruments in stainless steel. The new alloy proved to be very well suited to the requirements for surgical instrumentation, offering advantages such as no oxidation, relatively lightweight and yet extremely durable.

## Expansion into the Surgical Arena

In 1983 the company devoted more resources into the manufacture of surgical instruments, not only for ophthalmic surgery, but also for the neurosurgical and ear, nose and throat specialties. Duckworth & Kent became an independent surgical instrument manufacturer, subcontracting for well-known companies. In 1988 Duckworth & Kent ventured further into the arena by producing its own label instrumentation. Subsequently, Duckworth & Kent has enhanced its knowledge and gained considerable experience in the field of ophthalmic surgical instruments, such that it now markets and distributes its own range on a world-wide basis.

## The Present Day

The workforce continues to expand and diversify as the need arises, whether it be in design, manufacturing, sales or marketing. The ophthalmic product range now covers a wide variety of instruments and continues to change to meet the needs of this ever-advancing surgical speciality. As a consequence, Duckworth & Kent is now the leading manufacturer of high quality titanium ophthalmic surgical instruments.

## Why Surgeons Choose Duckworth & Kent



High Quality Reusable Instruments



Manufactured in Titanium



Precision Manufactured in England



Worldwide Delivery

# *Essential* CATARACT SET

The decision to choose our reusable instruments over single-use alternatives is a simple one. Not only are you investing in world-renowned high quality titanium alloy products, but also in instruments that have less impact on the environment and are more cost-beneficial in the long term.

When you invest in a Duckworth & Kent instrument you are purchasing a product that will serve you impeccably for innumerable years and countless procedures.

Cost Effective  
& Eco-Friendly






# Cost Calculator

When compared with single-use alternatives, Duckworth & Kent instruments are not only more cost-beneficial long term, but have a lower impact on the environment.

**See how much you can save** by investing in our innovative precision engineered reusable titanium product range.



## Cost Effective Precision Engineered Reusable Titanium Instruments

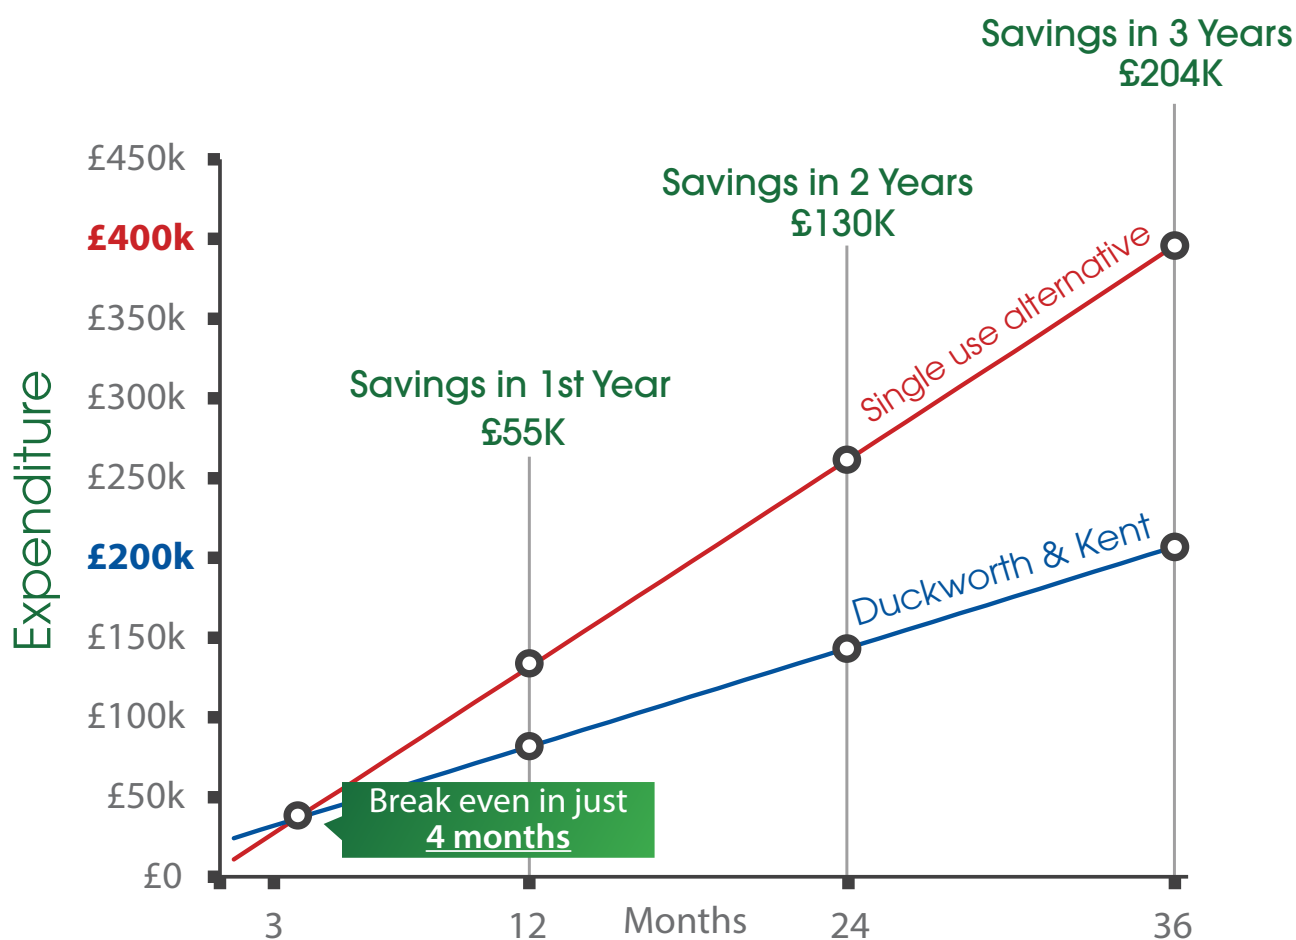

Prices as of January 2019

The above chart is an illustration of the costs involved when comparing reusable titanium cataract sets from D&K with a competitor supplying single-use instruments. A cataract set of 6 instruments is comprised of: speculum; toothed forceps; cross-action capsulorhexis forceps, nucleus manipulator / rotator and bimanual irrigation and aspiration handpieces. Illustration based upon an eye unit performing 2000 cataract operations per year with sterilising and cleaning costs of £30 per instrument tray and £20 for the phaco handpiece only. Assumption that a minimum of 28 reusable cataract sets will be required and may incur a reusable repair / replacement rate of 4 instruments per month.

[www.duckworth-and-kent.com/cost-saving-calculator](http://www.duckworth-and-kent.com/cost-saving-calculator)

# CORE VALUES

## *Collection*

Innovation has been at the heart of our philosophy for over half a century, driven by an uncompromising quest for perfection and an enduring commitment to exceptional engineering.

Duckworth & Kent is proud to present the "Core Values Collection", a range of reusable instruments offering our renowned precision and quality at an exceptional price.

Irrigation & Aspiration

Manipulators, Hooks & Spatulas

Probes

Eye Shields

Premium Quality  
Competitive Prices



# E-RANGE

## *Instruments*

Innovation is at the heart of our philosophy and is driven by our enduring commitment to provide surgeons with only the highest quality reusable titanium ophthalmic instrumentation.

We are proud to announce and unveil our latest line of instrumentation, the "E-Range".

This range represents the application of cutting edge technology fused with over 60 years of engineering knowledge. These instruments offer surgeons an elegant, well balanced and ergonomically designed handle whilst still providing our high quality, consistent and durable functionality.

Ergonomically Designed

Expertly Crafted

Engineered to Perfection

Exceptional Price



An Innovation in  
**Ergonomic** Design

Our E-Range continues to expand

Visit our website: [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com) to view the full range and latest additions to this innovative, ergonomic and expertly crafted instrument range.

# REUSABLE TITANIUM INSTRUMENTS



MANUFACTURED IN ENGLAND

# Scissors

Canaloplasty  
Capsule, Capsulotomy  
Conjunctival  
Corneal  
Iris  
IOL Cutter  
Retinal - Fixed Heads  
Retinal - Interchangeable Heads  
Utility and Westcott  
Vannas

1


## Capsule, Capsulotomy

1-116




### DK Capsule Scissors, Curved

- Blunt tips, curved blades
- Cut length 6mm, tip to pivot length 11mm
- Flat handle, length 99mm



1-625




### Capsule Scissors, Curved Shaft, 23 Gauge

- Sharp tipped straight scissors
- Curved 23 gauge tube, length 15mm
- Squeeze action handle closes scissors
- Round squeeze handle, length 123mm



1-630




### Iris Scissors, Curved Shaft, 23 Gauge

- Blunt tipped straight scissors
- Curved 23 gauge tube, length 15mm
- Squeeze action handle closes scissors
- Round squeeze handle, length 122mm




## Conjunctival

1-227




### Osher Universal Conjunctival Micro Scissors

- Blunt tips, curved blades
- Cut length 10mm, tip to pivot length 21mm
- Flat handle, length 116mm
- Fine blades, suitable for precise incision opening




1-510



### Westcott Style Tenotomy Scissors, Curved

- Blunt tips, curved blades
- Cut length 10mm, tip to pivot length 20mm
- Flat handle, length 115mm




## Corneal

1-118




### DK Castroviejo Miniature Corneal Scissors, Curved

- Blunt tips, curved blades
- Universal cutting blades
- Cut length 6mm, tip to pivot length 11mm
- Flat handle, length 115mm




1-218




### Anwar Corneal Scissors, Curved to Right

- Blunt tips, curved blades
- Long inner blade with smoothly polished ends
- Cut length 5mm, tip to pivot length 11mm
- Round handle, length 107mm



Corneal scissors specially designed for removal of the final corneal lamella in front of the Descemet's membrane. One blade is longer to avoid an accidental cut into the Descemet's membrane. The longer blade has a smoothly polished tip end to allow minimum dissection of any attachment between the Descemet's membrane and the corneal lamella.

1-219

**Anwar Corneal Scissors, Curved to Left**

- Blunt tips, curved blades
- Long outer blade with smoothly polished ends
- Cut length 5mm, tip to pivot length 11mm
- Round handle, length 103mm




Corneal scissors specially designed for removal of the final corneal lamella in front of the Descemet's membrane. One blade is longer to avoid an accidental cut into the Descemet's membrane. The longer blade has a smoothly polished tip end to allow minimum dissection of any attachment between the Descemet's membrane and the corneal lamella.

1-400

**Castroviejo Corneal Scissors, Curved to Right**


- Blunt tips, curved blades, right
- Cut length 5mm, tip to pivot length 10mm
- Flat handle, length 97mm



1-401

**Castroviejo Corneal Scissors, Curved to Left**


- Blunt tips, curved blades, left
- Cut length 5mm, tip to pivot length 10mm
- Flat handle, length 97mm



1-410

**Castroviejo Corneal Scissors, Curved to Right**


- Blunt tips, curved blades, right
- Cut length 5mm, tip to pivot length 10mm
- Flat handle, length 113mm




1-411

**Castroviejo Corneal Scissors, Curved to Left**


- Blunt tips, curved blades, left
- Cut length 5mm, tip to pivot length 10mm
- Flat handle, length 113mm

**Iris**

1-210

**DK Iris Scissors, Straight**


- Sharp tips, straight blades
- Cut length 4mm, tip to pivot length 11mm
- Round handle, length 107mm



1-211

**DK Iris Scissors, Curved**

- Sharp tips, curved blades
- Cut length 4mm, tip to pivot length 11mm
- Round handle, length 107mm



1-211B




**DK Iris Scissors, Curved**

- Blunt tips, curved blades
- Cut length 4mm, tip to pivot length 11mm
- Round handle, length 101mm




**IOL Cutters**

1-700




**Osher IOL Cutter, Straight**

- Blunt tips with micro serrated blades
- Minimum incision size 2.8mm
- Cut length 5mm
- Tip to pivot length 9.5mm
- Flat handle, length 98mm




1-705




**Osher IOL Cutter, Angled**

- Blunt tips with micro serrated blades
- Minimum incision size 2.8mm
- Cut length 5mm
- Tip to pivot length 9.5mm
- Flat handle, length 94mm




▶ Video Available

1-805



**Osher Haptic Cutter**

- 20 gauge, 20mm long shaft
- Squeeze action activates jaws to sever haptic
- Round squeeze handle, length 123mm

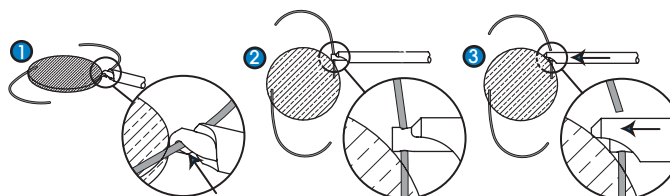


Tips of the the Osher Haptic Cutter have a notch that fits over and grasps the haptic (fig1). When the handle of the Osher Haptic Cutter is squeezed (fig2 - 3) the outside tube of the tip moves forwards and severs the haptic.

**Retinal - Fixed Heads**

The fixed head range of vitreoretinal forceps and scissors are one piece devices featuring the same tip and handle design as the interchangeable head.


All fixed head vitreoretinal forceps and scissors are supplied with a protective guard which can be sterilised.

1-841




**Squeeze Handle Straight Micro Scissors - 23 Gauge**

- Sharp tipped straight micro scissors
- 2.2mm long blade
- Straight 23 gauge tube, length 32.5mm
- Squeeze action handle closes scissors
- Round squeeze handle, length 138mm




1-841B




**Squeeze Handle Straight Micro Scissors - 23 Gauge**

- Blunt tipped straight micro scissors
- 1.9mm long blade
- Straight 23 gauge tube, length 32.5mm
- Squeeze action handle closes scissors
- Round squeeze handle, length 138mm





1-842



### Squeeze Handle Curved Blade Micro Scissors - 23 Gauge




- Sharp tipped curved micro scissors
- 2.2mm long blade
- Straight 23 gauge tube, length 32.5mm
- Squeeze action handle closes scissors
- Round squeeze handle, length 139mm

## Retinal - Interchangeable Heads

All Interchangeable Vitreoretinal (VR) Heads are sold separate from the handle. The VR Heads require a handle for operation. ONLY the DK Squeeze Handle for VR Instrument Heads, ref 6-676, is suitable. All VR Heads come fitted with a plastic (PEEK) re-usable Protective Cover, that can withstand cleaning and reprocessing cycles. The VR Heads are screwed onto the thread of DK Squeeze Handle for VR Instrument Heads. It is recommended, for device protection, to keep the plastic (PEEK) re-usable protective cover fitted until the instrument is required for use.

1-841N




### Straight Micro Scissors Head, 23 Gauge



- Sharp tipped straight micro scissors
- 2.2mm long blade
- Straight 23 gauge tube, length 31.3mm
- Requires DK Squeeze Handle, ref 6-676
- Detachable tip heads for cleaning purposes
- Colour coding for tip and gauge size identification
- Once attached to round squeeze handle, length is 144mm

1-841BN




### Straight Blunt Micro Scissors Head, 23 Gauge



- Blunt tipped straight micro scissors
- 1.9mm long blade
- Straight 23 gauge tube, length 31.3mm
- Requires DK Squeeze Handle, ref 6-676
- Detachable tip heads for cleaning purposes
- Colour coding for tip and gauge size identification
- Once attached to round squeeze handle, length is 144mm

1-842N



### Curved Blade Micro Scissors Head, 23 Gauge



- Sharp tipped curved micro scissors
- 2.2mm long blade
- Straight 23 gauge tube, length 31.3mm
- Requires DK Squeeze Handle, ref 6-676
- Detachable tip heads for cleaning purposes
- Colour coding for tip and gauge size identification
- Once attached to round squeeze handle, length is 144mm


6-676

### Squeeze Handle for Vitreoretinal Instrument Heads

- Suitable for all Duckworth & Kent Vitreoretinal Instrument Heads
- Overall Length 92 mm (without head)
- Squeeze action handle




1-500




**Westcott Style Stitch Scissors, Straight**

- Semi-sharp tips, straight blades
- Cut length 10mm, tip to pivot length 20mm
- Flat handle, length 115mm




1-500B



**DK Westcott Style Stitch Scissors, Straight**

- Blunt tips, straight blades
- Cut length 9mm, tip to pivot length 20mm
- Flat handle, length 115mm




1-501



**Westcott Style Stitch Scissors, Curved**

- Semi-sharp tips, curved blades
- Cut length 10mm, tip to pivot length 20mm
- Flat handle, length 115mm



1-501B




**DK Westcott Style Stitch Scissors, Curved**

- Blunt tips, curved blades
- Cut length 9mm, tip to pivot length 20mm
- Flat handle, length 115mm



1-510




**Westcott Style Tenotomy Scissors, Curved**

- Blunt tips, curved blades
- Cut length 10mm, tip to pivot length 20mm
- Flat handle, length 115mm




1-512




**Westcott Style Tenotomy Scissors, Curved**

- Sharp tips, curved blades
- Cut length 10mm, tip to pivot length 20mm
- Flat handle, length 115mm



## Vannas


1-110

**Vannas Scissors, Straight**

- Sharp tips, straight blades
- Cut length 5mm, tip to pivot length 9mm
- Flat handle, length 97mm



1-111

**Vannas Scissors, Curved**

- Sharp tips, curved blades
- Cut length 5mm, tip to pivot length 9mm
- Flat handle, length 97mm



1-111B

**DK Vannas Scissors, Curved**

- Blunt tips, curved blades
- Cut length 5mm, tip to pivot length 9mm
- Flat handle, length 97mm




1-112

**DK Vannas Scissors, Angled**


- Sharp tips, angled blades
- Cut length 5mm, tip to pivot length 9mm
- Flat handle, length 97mm



1-120

**DK Vannas Scissors, Straight**


- Sharp tips, straight blades
- Cut length 8mm, tip to pivot length 15mm
- Flat handle, length 103mm



1-121

**DK Vannas Scissors, Curved**

- Sharp tips, curved blades
- Cut length 8mm, tip to pivot length 15mm
- Flat handle, length 103mm




1-122



Gills-Welsh-Vannas Scissors, Angled

- Sharp tips, angled blades
- Cut length 9mm, tip to pivot length 16.5mm
- Flat handle, length 100mm



1-312



DK Gills-Vannas Scissors, Angled

- Sharp tips, angled blades
- Cut length 6mm, tip to pivot length 11.5mm
- Flat handle, length 97mm



## Quality Control

Quality comes as second nature to Duckworth & Kent and we pride ourselves on the quality of medical devices we produce.

Duckworth & Kent applies rigorous inspection procedures throughout the manufacturing process. Everyone in the company is trained to recognise the need for scrupulous attention to detail in the tasks they carry out. Our staff appreciate the importance of producing quality products to ensure guaranteed reliability.

As well as final inspection, the company's inspection department carries out inspection at various stages of manufacturing.

With over 60 years specialising in precision engineering, Duckworth & Kent offers a high standard of quality that is hard to surpass.

# REUSABLE TITANIUM INSTRUMENTS




MANUFACTURED IN ENGLAND

# Forceps

Capsulorhexis  
Cilia / Epilation  
Clamps  
Colibri  
Conjunctival  
Corneal  
Flap Lifting  
Gland Pressing  
Intraocular Lens  
KAMRA™  
Laser Protection  
Muscle  
Pierse / Notched  
Nucleus Cracking and Prechopping  
Oculoplastics  
Plain Tip  
ReLEx® SMILE  
Retinal  
Toothed  
Tying

2

2-712-3ER8

Utrata Capsulorhexis Forceps, Curved Shafts

- Utrata style tips
- Curved shafts, tip to angle length 13mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Round handle, length 111mm
- Design registration number 004383396-0001




2-712-4ER8

Utrata Capsulorhexis Forceps, Curved Shafts

- Utrata style tips
- Curved shafts, tip to angle length 13mm
- 1mm increment markings along shafts
- Round handle, length 111mm
- Design registration number 004383396-0001




2-714-3ER8

Utrata Capsulorhexis Forceps, Straight Shafts

- Utrata style tips
- Straight shafts, tip to angle length 13mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Round handle, length 111mm
- Design registration number 004383396-0001




2-718-3E

Utrata Capsulorhexis Forceps, Curved Shafts

- Utrata style tips
- Curved shafts, tip to angle length 13mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Flat handle, length 86mm
- Design registration number 004383396-0001




2-719-3E

Utrata Capsulorhexis Forceps, Straight Shafts

- Utrata style tips
- Straight shafts, tip to angle length 13mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Flat handle, length 86mm
- Design registration number 004383396-0001



2-719-4E

Utrata Capsulorhexis Forceps, Straight Shafts

- Utrata style tips
- Straight shafts, tip to angle length 13mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Flat handle, length 111mm
- Design registration number 004383396-0001






E-Range Capsulorhexis, Mackool-Inamura Cross Action

1.8mm Incision

2-706GE

Mackool-Inamura Flat Handle Capsulorhexis Forceps with Blunt Tips



- Blunt serrated interlocking tips
- Curved shaft
- Tip to pivot point 11mm
- Cross action tips, 1.5mm width at pivot box
- Tips angled 45° to handle
- Flat handle, overall length 116mm
- Design registration number 004383396-0001


When entering through a corneal incision, the increased curvature of the shafts prevent corneal deformation during use. The smooth blunt tips ensure easy entry.

2-2-706G

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-706GRE

Mackool-Inamura Round Handle Capsulorhexis Forceps with Blunt Tips



- Blunt serrated interlocking tips
- Curved shaft
- Tip to pivot point 11mm
- Cross action tips, 1.5mm width at pivot box
- Tips angled 45° to handle
- Round handle, overall length 116mm
- Design registration number 004383396-0001


When entering through a corneal incision, the increased curvature of the shafts prevent corneal deformation during use. The smooth blunt tips ensure easy entry.

2-2-706GR

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-706G-1E

Mackool-Inamura Flat Handle Capsulorhexis Forceps with Pointed Tips



- Pointed serrated interlocking tips
- Curved shaft
- Tip to pivot point 11mm
- Cross action tips, 1.5mm width at pivot box
- Tips angled 45° to handle
- Flat handle, overall length 116mm
- Design registration number 004383396-0001


When entering through a corneal incision, the increased curvature of the shafts prevent corneal deformation during use. The pointed tips puncture the anterior capsule to initiate the tear.

2-2-706G-1

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-706G-1RE

Mackool-Inamura Round Handle Capsulorhexis Forceps with Pointed Tips



- Pointed serrated interlocking tips
- Curved shaft
- Tip to pivot point 11mm
- Cross action tips, 1.5mm width at pivot box
- Tips angled 45° to handle
- Round handle, overall length 116mm
- Design registration number 004383396-0001


When entering through a corneal incision, the increased curvature of the shafts prevent corneal deformation during use. The pointed tips puncture the anterior capsule to initiate the tear.

2-2-706G-1R

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

Consistent capsulorhexis size is crucial for optimal IOL implant function. Utilising the smooth action of the Inamura cross action capsulorhexis forceps, the new Calladine Inamura Capsulorhexis Forceps incorporate a visible scale engraved at the functional end of the tips that denotes the desired diameter and radius of the capsulorhexis. The surgeon can repeatedly measure the size of the capsulorhexis using the forceps within the anterior chamber. It has been found that measuring on the cornea surface over estimates the actual size of the capsulorhexis when measured within the anterior chamber by up to 20%.

## 2-716G-8E


Calladine-Inamura Flat Handle Capsulorhexis Forceps, Scleral Tunnel Incision

- Pointed serrated interlocking tips
- Curved shaft, tip to pivot point 11mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft at 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° to handle
- Flat handle, overall length 115mm
- Design registration number 004383396-0001

2-2-716G-8

Alternative handle design also available.  
Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

## 2-716G-8SE


Calladine-Inamura Short Flat Handle Capsulorhexis Forceps, Scleral Tunnel Incision

- Pointed serrated interlocking tips
- Curved shaft, tip to pivot point 11mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft at 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° to handle
- Short flat handle, overall length 90mm
- Design registration number 004383396-0001

2-2-716G-8S



Alternative handle design also available.  
Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

## 2-716G-8RE

Calladine-Inamura Round Handle Capsulorhexis Forceps, Scleral Tunnel Incision

- Pointed serrated interlocking tips
- Curved shaft, tip to pivot point 11mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft at 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° to handle
- Round handle, overall length 115mm
- Design registration number 004383396-000

## 2-716G-8RSE

Calladine-Inamura Short Round Handle Capsulorhexis Forceps, Scleral Tunnel Incision


- Pointed serrated interlocking tips
- Curved shaft, tip to pivot point 11mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft at 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° to handle
- Short round handle, overall length 90mm
- Design registration number 004383396-000

2-2-716G-8RS

Alternative handle design also available.  
Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-716G-9E

Calladine-Inamura Flat Handle Capsulorhexis Forceps, Corneal Incision




- Pointed serrated interlocking tips
- Curved shaft, tip to pivot point 10mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft at 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° to handle
- Flat handle, overall length 115mm
- Design registration number 004383396-0001

2-2-716G-9

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-716G-9SE

Calladine-Inamura Short Flat Handle Capsulorhexis Forceps, Corneal Incision




- Pointed serrated interlocking tips
- Curved shaft, tip to pivot point 10mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft at 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° to handle
- Short flat handle, overall length 90mm
- Design registration number 004383396-0001

2-2-716G-9S

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-716G-9RE



Calladine-Inamura Round Handle Capsulorhexis Forceps, Corneal Incision



- Pointed serrated interlocking tips
- Curved shaft, tip to pivot point 10mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft at 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° to handle
- Round handle, overall length 115mm
- Design registration number 004383396-0001

2-716G-9RSE

Calladine-Inamura Short Round Handle Capsulorhexis Forceps, Corneal Incision










- Pointed serrated interlocking tips
- Curved shaft, tip to pivot point 10mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft at 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° to handle
- Short round handle, overall length 90mm
- Design registration number 004383396-0001








2-2-716G-9RS

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

**Comparison Chart - E-Range Calladine-Inamura Cross Action - Scleral Tunnel - 8E/8SE/8RE/8RSE**

Calladine-Inamura Capsulorhexis Forceps		1.8mm Incision		
Product Number	2-716G-8E	2-716G-8SE	2-716G-8RE	2-716G-8RSE
Handle Type	 Flat Handle		 Round Handle	
Handle Length Long Handle 115mm	✓		✓	
Handle Length Short Handle 90mm		✓		✓
Width at Pivot Box 1.5mm 			✓	
Marks on Shaft 2.5mm & 5mm 			✓	
Tip to Pivot Length 11mm 			✓ 11mm	
Curved Shaft 			✓	
All Tips - Angled 45° - Sharp - Serrated 			✓	

**Comparison Chart - E-Range Calladine-Inamura Cross Action - Corneal Incision - 9E/9SE/9RE/9RSE**


Calladine-Inamura Capsulorhexis Forceps		Corneal Incision 1.8mm Incision		
Product Number	2-716G-9E	2-716G-9SE	2-716G-9RE	2-716G-9RSE
Handle Type	 Flat Handle		 Round Handle	
Handle Length Long Handle 115mm	✓		✓	
Handle Length Short Handle 90mm		✓		✓
Width at Pivot Box 1.5mm 			✓	
Marks on Shaft 2.5mm & 5mm 			✓	
Tip to Pivot Length 10mm 			✓ 10mm	
Curved Shaft 			✓	
All Tips - Angled 45° - Sharp - Serrated 			✓	

**E-Range Capsulorhexis, Jones-Inamura Cross Action**

**1.8mm Incision**

**2-716G-10E**

**Jones-Inamura Flat Handle Capsulorhexis Forceps, Suitable For Scleral Tunnel Incision**





- Pointed serrated interlocking tips
- Curved shaft, tip to pivot point 11mm
- Marks on shaft every 1mm from tip to 6mm
- Cross action tips, 1.5mm width at pivot box
- Tips angled 45° to handle
- Flat handle, overall length 115mm
- Design registration number 004383396-0001

**2-2716G-10**

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

**2-716G-10RE**

**Jones-Inamura Round Handle Capsulorhexis Forceps, Suitable For Scleral Tunnel Incision**



- Pointed serrated interlocking tips
- Curved shaft, tip to pivot point 11mm
- Marks on shaft every 1mm from tip to 6mm
- Cross action tips, 1.5mm width at pivot box
- Tips angled 45° to handle
- Round handle, overall length 115mm
- Design registration number 004383396-0001


Accurate capsulorhexis size is crucial for optimal IOL implant function. Dr Jones has utilised the Inamura cross action capsulorhexis forceps by adding an engraved scale from the tip to 6mm along the shaft. The scale is in 1mm increments and enables the surgeon to repeatedly measure the size of the capsulorhexis using the forceps within the anterior chamber. Measuring on the cornea surface overestimates the actual size of the capsulorhexis when compared with the anterior chamber measurement.

**E-Range Capsulorhexis, Inamura Cross Action**

**1.5mm Incision**

**2-716GNE**


**Inamura Flat Handle Capsulorhexis Forceps, Corneal Incision**



- Sharp pointed serrated tips
- Cross action tips, 1.2mm width at pivot box
- Curved shaft, tip to pivot point 8.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Flat handle, overall length 110mm
- Design registration number 004383396-0001

**2-716GN-2E**


**Inamura Flat Handle Capsulorhexis Forceps, Corneal Incision, 90° Tips**



- Extra sharp pointed serrated tips
- Cross action tips, 1.2mm width at pivot box
- Curved shaft, tip to pivot point 8.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Flat handle, overall length 110mm
- Design registration number 004383396-0001

2-716GN-3E


**Inamura Flat Handle Capsulorhexis Forceps, Corneal Incision**



- Sharp pointed serrated tips
- Cross action tips, 1.2mm width at pivot box
- Curved shaft, tip to pivot point 9.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Flat handle, overall length 110mm
- Design registration number 004383396-0001

2-716GN-4E

**Inamura Flat Handle Capsulorhexis Forceps, Corneal Incision, 90° Tips**




- Extra sharp pointed serrated tips
- Cross action tips, 1.2mm width at pivot box
- Curved shaft, tip to pivot point 9.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Flat handle, overall length 110mm
- Design registration number 004383396-0001

**2-716GN-4**

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-716GN-5E


**Inamura Flat Handle Capsulorhexis Forceps, Corneal Incision**



- Sharp pointed serrated tips
- Cross action tips, 1.2mm width at pivot box
- Curved shaft, tip to pivot point 10.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Flat handle, overall length 111mm
- Design registration number 004383396-0001

2-716GNR8E


**Inamura Round Handle Capsulorhexis Forceps, Corneal Incision**



- Sharp pointed serrated tips
- Cross action tips, 1.2mm width at pivot box
- Curved shaft, tip to pivot point 8.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Round handle, overall length 110mm
- Design registration number 004383396-0001

Straight shaft alternative


2-716GNR8-1



- Straight shaft, tip to pivot point 8.5mm
- Round handle, overall length 111mm

2-716GNR8-2E

**Inamura Round Handle Capsulorhexis Forceps, Corneal Incision, 90° Tips**




- Extra sharp pointed serrated tips
- Cross action tips, 1.2mm width at pivot box
- Curved shaft, tip to pivot point 8.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Round handle, overall length 110mm
- Design registration number 004383396-000

2-716GNR8-2

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-716GNR8-3E

**Inamura Round Handle Capsulorhexis Forceps, Corneal Incision**




- Sharp pointed serrated tips
- Cross action tips, 1.2mm width at pivot box
- Curved shaft, tip to pivot point 9.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Round handle, overall length 110mm
- Design registration number 004383396-000

2-716GNR8-3

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-716GNR8-4E

**Inamura Round Handle Capsulorhexis Forceps, Corneal Incision, 90° Tips**




- Extra sharp pointed serrated tips
- Cross action tips, 1.2mm width at pivot box
- Curved shaft, tip to pivot point 9.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Round handle, overall length 110mm
- Design registration number 004383396-000

2-716GNR8-4

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-716GNR8-5E

**Inamura Round Handle Capsulorhexis Forceps, Corneal Incision**




- Sharp pointed serrated tips
- Cross action tips, 1.2mm width at pivot box
- Curved shaft, tip to pivot point 10.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Round handle, overall length 111mm
- Design registration number 004383396-000

2-716GNR8-5

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-716GW


**Inamura Flat Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips angled 45° from shaft
- Curved shaft, tip to pivot point 9.5mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Flat handle, overall length 110mm

2-716GW-2


**Inamura Flat Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips angled 45° from shaft
- Curved shaft, tip to pivot point 8.5mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Flat handle, overall length 110mm

2-716GWR8-2


**Inamura Round Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips angled 45° from shaft
- Curved shaft, tip to pivot point 8.5mm
- Cross action tips, 1.5mm width at pivot box
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- 8mm diameter round handle, overall length 110mm

2-716GE

**Inamura Round Handle Capsulorhexis Forceps, Serrated Cross Action Tips**




- Sharp pointed serrated tips
- Cross action tips, 1.5mm width at pivot box
- Curved shaft, tip to pivot point 9.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Flat handle, overall length 110mm
- Design registration number 004383396-0001



2-716GE-1


**Inamura Flat Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips
- Cross action tips, 1.5mm width at pivot box
- Curved shaft, tip to pivot point 10.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Flat handle, overall length 111mm
- Design registration number 004383396-0001

2-716GE-1S


**Inamura Flat Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips
- Cross action tips, 1.5mm width at pivot box
- Curved shaft, tip to pivot point 10.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Flat handle, overall length 86mm
- Design registration number 004383396-0001

2-716GE-2


**Inamura Flat Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips
- Cross action tips, 1.5mm width at pivot box
- Curved shaft, tip to pivot point 8.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Flat handle, overall length 110mm
- Design registration number 004383396-0001

2-716GE-3


**Inamura Flat Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips
- Cross action tips, 1.5mm width at pivot box
- Straight shaft, tip to pivot point 9.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Flat handle, overall length 110mm
- Design registration number 004383396-0001

2-716GER8


**Inamura Round Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips
- Cross action tips, 1.5mm width at pivot box
- Curved shaft, tip to pivot point 9.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Round handle, overall length 110mm
- Design registration number 004383396-0001

2-716GER8-1


**Inamura Round Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips
- Cross action tips, 1.5mm width at pivot box
- Curved shaft, tip to pivot point 10.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Round handle, overall length 111mm
- Design registration number 004383396-0001

2-716GER8-1S


**Inamura Round Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips
- Cross action tips, 1.5mm width at pivot point
- Curved shaft, tip to pivot point 10.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Round handle, overall length 86mm
- Design registration number 004383396-0001

2-716GER8-2


**Inamura Round Handle Capsulorhexis Forceps, Serrated Cross Action Tips**



- Sharp pointed serrated tips
- Cross action tips, 1.5mm width at pivot box
- Curved shaft, tip to pivot point 8.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Round handle, overall length 110mm
- Design registration number 004383396-0001

2-716GER8-3

**Inamura Round Handle Capsulorhexis Forceps, Serrated Cross Action Tips**





- Sharp pointed serrated tips
- Cross action tips, 1.5mm width at pivot box
- Straight shaft, tip to pivot point 9.5mm
- Marks on shaft 2.5mm and 5mm denote desired size of capsulorhexis
- Tips angled 45° from shaft
- Round handle, overall length 110mm
- Design registration number 004383396-0001

**Small Incision Capsulorhexis**

**1mm Incision**

2-847-4

**DK Squeeze Handle Capsulorhexis Forceps**




- Fine pointed tips with platforms
- 0.9mm tip opening
- Curved 23 gauge tube
- Squeeze action activates both jaws
- Round squeeze handle, length 122mm

Cilia / Epilation

2-195

DK Beaupre Cilia Forceps




- Tapered, smooth tips
- 30° angled shafts, tip to angle length 10.5mm
- Flat cross action handle, length 105mm



2-195-1

Otaka Cilia Forceps




- Tapered, smooth oval tips
- 30° angled shafts, tip to angle length 10.5mm
- Flat cross action handle, length 105mm



Oval shape of jaws reduce contact area with cilia , thereby allowing cilia to fall away when removed.

2-195NR8

DK Round Handle Cilia Forceps




- Tapered, smooth tips
- 30° angled shafts, tip to angle length 11.5mm
- 8mm diameter round cross action handle, length 115mm



2-196

KY Cilia Forceps




- Medium angled jaws
- 30° angled shafts, tip to angle length 8.5mm
- Round handle, length 107mm



2-2195E

Cilia Forceps



- Tapered, smooth tips
- 30° angled shafts, tip to angle length 7mm
- Short ridged handle, length 90mm
- Design registration number 004383396-0001




## Clamps

2-640

### DK Desmarres Chalazion Forceps / Clamp

- 17.5mm internal / 20mm external oval circular working diameter upper plate
- 20mm diameter lower plate
- Polished finish lower plate
- Flat handle, locking thumb screw, length 88mm

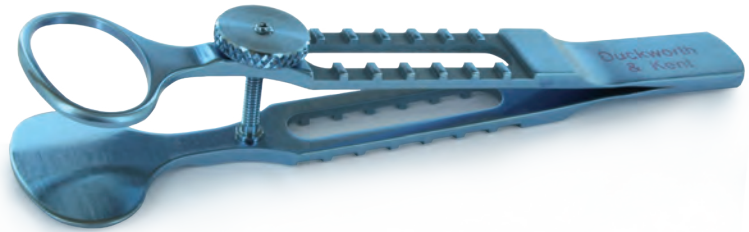

2-685

### DK Conjunctival Clamp

- 6.5mm wide highly polished tips
- Length 73mm

Designed to hold and protect 'free' edge of conjunctival flap created in trabeculectomy.



2-686

### Khaw Small Conjunctival Clamp

- Holds conjunctiva securely
- Particularly useful during fornix based conjunctival incisions
- Single handed action
- Holds and protects the conjunctival edge during antimetabolite application
- Tip width 4mm
- Overall length 74mm



2-687

### Khaw Large Conjunctival Clamp

- Holds conjunctiva securely
- Particularly useful during fornix based conjunctival incisions
- Single handed action
- Holds and protects the conjunctival edge during antimetabolite application
- Tip width 12mm
- Overall length 74mm



6-800

### Barrett LeClip Utility Clamp

- 14mm serrated cross action jaws
- Length 82mm
- Distinctive identification labelling

Replaces need for a mosquito or artery forceps. Holds sutures to drape without piercing plastic.



6-805


### Bulldog Clip

- 8.5mm serrated cross action jaws
- Length 46mm



**Colibri, 0.12 Toothed**

**2-132E**




**Colibri Toothed Forceps, 0.12mm**

- 0.12mm, 1 x 2 teeth, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



**2-135E**




**Colibri Toothed Forceps, 0.12mm**

- 0.12mm, 1 x 2 teeth, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001



**2-135NR**




**Colibri Toothed Forceps, 0.12mm**

- 0.12mm, 1 x 2 teeth, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- 10mm diameter round handle, length 114mm



**2-214E**




**Troutman-Barraquer Colibri Toothed Forceps, 0.12mm**

- 0.12mm, 1 x 2 teeth, tip length 1.5mm
- 6mm tying platforms
- Colibri style shafts
- Micro flat handle, length 77mm
- Design registration number 004383396-0001



**2-215E**




**Troutman-Barraquer Colibri Forceps, 0.12mm**

- 0.12mm, 1 x 2 teeth, tip length 0.8mm
- 6mm tying platforms
- Colibri style shafts
- Micro flat handle, length 77mm
- Design registration number 004383396-0001



2-130E




### Pierse Notched Colibri Forceps, 0.25mm

- Pierse 0.25mm notched, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001




2-130D




### Pierse Notched Colibri Forceps, Dolphin Handle, 0.25mm

- Pierse 0.25mm notched, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- Dolphin handle, length 94mm



Conjunctival

2-167E




**Osher Conjunctival Forceps**

- Smooth Platforms
- Straight shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001



2-500-4E




**Chihara Conjunctival Forceps**

- 6mm platforms
- Serrated tips
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-500-4N




**Chihara Straight Conjunctival Forceps**

- 6mm platforms
- Serrated tips
- Straight shafts
- Flat handle, length 84mm



2-501-2E




**Chihara Curved Conjunctival Forceps**

- 6mm platforms
- Serrated tips
- Curved shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-502E




**Khaw Transconjunctival Adjustable Suture Control Forceps**

- 5mm highly polished tying platforms
- For massaging and adjusting intraocular pressure to desired level
- Adjustable Suture Control technique
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-503E




**Otaka Conjunctiva Forceps**

- Textured tips
- Straight shafts
- Grooved channel along platform length, stopping just before tip
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-505-4N



**Chihara Curved Conjunctival Forceps**

- 6mm platforms
- Serrated tips
- Curved shafts
- Flat handle, length 114mm



2-685

**DK Conjunctival Clamp**

- 6.5mm wide highly polished tips
- Length 73mm

Designed to hold and protect 'free' edge of conjunctival flap created in trabeculectomy.



2-686

**Khaw Small Conjunctival Clamp**

- Holds conjunctiva securely
- Particularly useful during fornix based conjunctival incisions
- Holds & protects the conjunctival edge during antimetabolite application
- Single handed action
- Tip width 4mm
- Overall length 74mm



2-687


**Khaw Large Conjunctival Clamp**

- Holds conjunctiva securely
- Particularly useful during fornix based conjunctival incisions
- Single handed action
- Holds and protects the conjunctival edge during antimetabolite application
- Tip width 12mm
- Overall length 74mm



2-510

**Moorfields Utility Forceps**




- Serrated tips, 2mm wide
- Straight shafts
- Flat handle, length 116mm



2-510N

**Moorfields Utility Forceps**




- Serrated tips, 2mm wide
- Straight shafts
- Flat handle, length 115mm





2-510-1E

**Moorfields Utility Forceps**



- Delicate serrated tips, 1mm wide
- Straight shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001



2-510-1N

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

**Corneal**

2-170E

**Double Fixation Colibri Forceps**



- 0.12mm, 1 x 2 teeth, 2 point fixation, 1mm separated
- Colibri style shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-185

**Maumenee Corneal Forceps, 0.12mm**




- 0.12mm, 1 x 2 teeth, tip length 2mm
- 20° angled shafts, tying platforms 10mm
- Miniature cross action Colibri style shafts
- Round cross action handle, length 123mm



2-285E

**DMEK Descemet's Stripping Forceps**



- Smooth platforms
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001




2-285

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

The forceps are used to hold the edges of Descemet's when stripping membrane from the donor cornea.

2-287E

**DMEK Angled Descemet's Stripping Forceps**



- Smooth platforms
- Angled shafts
- Long handle, length 115mm
- Design registration number 004383396-0001




2-287

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

The forceps are used to hold the edges of Descemet's when stripping membrane from the donor cornea.

2-787-1E



### DMEK Forceps

- Angled tip
- Serrated interlocking tips
- Tip to pivot point 9.8mm
- 1.5mm width at pivot box
- Tips angled 45° to handle
- Flat handle, length 113mm
- Design registration number 004383396-0001



2-2-787-1

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)


2-838

▶ Video Available



### Güell Descemet's Membrane Manipulation Forceps

- 3mm long tips angled 10°
- Curved 22 gauge tube, length 21mm
- Squeeze handle activates both jaws
- Round squeeze handle, length 123mm



Easy introduction through corneal incisions down to 20 gauge. Safe membrane manipulation of both recipient and donor tissue with a low risk of rupture.

## Flap Lifting

2-795E



### Stein Utility / Flap Lifting Forceps


- Small flat ring tips
- 45° angled shafts, tip to angle length 4mm
- Flat handle, length 90mm
- Design registration number 004383396-0001



Designed with shortened, small flat ring tips for removal of contact lens at slit lamp microscope. Useful for contact lens removal following PRK and other refractive surgical procedures.


## Gland Pressing

2-635




### Kudo Meibomian Gland Pressing Forceps

- 60° angled shafts
- 4.5mm x 3mm fine crossed hatched serrated jaws
- Internal faces of tip are cross hatched
- Cross action handle, length 112mm




## IOL Folding / Insertion / Loading

2-700




### Shepard IOL Forceps

- Curved 1.5mm tips
- Cross action handle, length 112mm



2-770E




**Deitz ICL Loading Forceps**

- Inside jaws textured, 4mm tip angle
- 20° angled shafts, tip to angle length 14mm
- Highly polished outer jaws
- Flat handle, length 88mm
- Design registration number 004383396-0001



Extra delicate, long jaws for inserting ICL into barrel of injector cartridge.

2-774-1E




**IOL Folding Forceps**

- Paddle style jaws
- Flat handle, length 112mm
- Design registration number 004383396-0001



Conducive for upward folding. Designed for the AcrySof IOL implant.

2-796E




**Nucleus Removal Forceps, Serrated Tip**

- 4mm serrated tips
- 30° angled shafts, tip to angle length 14mm
- Flat handle, length 88mm
- Design registration number 004383396-0001



For removal of IOL implant or manual removal of nucleus

2-896-2




**Small Incision ICL Manipulating Forceps, Angled Flat Disc Tips**

- Flat tip, 1.9mm wide disc with platform
- Tips angled at 10°
- Squeeze action handle activates both jaws
- 20 gauge, 32.5mm long straight shaft
- Round squeeze handle, length 139mm



Suitable for ICL manipulation.

2-896-3




**Small Incision ICL Manipulating Forceps, Angled Flat Disc Tips**

- Flat tip, 1.9mm wide disc with platform
- Upper disc coloured gold for orientation reference
- Tips angled at 15°
- Corresponding gold star on handle, relates to gold tip
- Squeeze action handle activates both jaws
- 20 gauge, 32.5mm long straight shaft
- Round squeeze handle, length 139mm



Suitable for ICL manipulation.

DK7710E



**IOL Holding Forceps**


- 45° angled shafts, tip to angle length 7mm
- Highly polished inner jaw surfaces
- Flat handle, length 111mm
- Design registration number 004383396-0001



Highly polished inner jaw surfaces protect from scratching. Designed specifically for AcrySof IOL implant approved by Alcon.

DK7717E

IOL Loading Forceps



- For loading AcrySof IOL into the MONARCH II and III cartridges
- Highly polished tips protect from scratching the lens surface
- Round handle, length 119mm


DK7717

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

The DK7717E Lens Loading Forceps are used to load the IOL into the cartridge. To ensure a successful IOL delivery and implantation, proper loading of the IOL implant into the cartridge is essential.

DK7726

Lens Loading Forceps




- For loading the TECNIS® 1-Piece IOL implant into the One Series™ Ultra Cartridge
- Polished tips protect from scratching the lens surface
- A stop ensures the IOL implant is not advanced beyond the recommended position in the cartridge
- 8mm diameter round handle, length 114mm

The DK7726 Lens Loading Forceps are used to load the AMO TECNIS® 1-Piece IOL implant into the AMO One Series Ultra Cartridge. To ensure a successful IOL delivery and implantation, correct loading and setting of the IOL implant into the cartridge is essential.

DK7740E

IOL Insertion Forceps




- Highly polished inner jaw
- Biconvex jaw design
- 40° angled shafts, tip to angle length 7.5mm
- Flat handle, length 107mm
- Design registration number 004383396-0001

Highly polished inner jaw surface protect from scratching the lens surface. Designed specifically for AcrySof IOL implant approved by Alcon.

2-695

IOL Gripping Forceps, 23 Gauge




- Fine end gripping tips
- Curved 23 gauge tube, tube length 15mm
- Squeeze handle activates both jaws
- Round squeeze handle, overall length 122mm


## Telescope Lens

2-754

▶ Video Available



### Lane Implantable Miniature Telescope (IMT) Forceps




- Upper forceps tip is narrower than lower tip with teeth; allows for better visual control
- Used to stabilise and hold the telescope during implantation
- Safely and reliably handle the IMT, reducing the chance of dropping it intra-operatively
- Flat handle, length 116mm



## Muscle

2-160




### Troutman Superior Rectus Forceps



- 0.5mm, 1 x 2 teeth
- 45° angled shafts, tip to angle length 10mm
- Flat handle, length 113mm

## Pierse, 0.25mm Notched

2-100E



### Pierse Notched Forceps, 0.25mm Straight




- Pierse 0.25mm notched, 6mm tying platforms
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001

2-100N

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-100D




### Pierse Notched Forceps, Dolphin Handle, 0.25mm



- Pierse 0.25mm notched, 6mm tying platforms
- Straight shafts
- Dolphin handle, length 95mm

2-101E

Notched Forceps, 0.25mm Curved




- Pierce 0.25mm notched, 6mm tying platforms
- Curved shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-101D

Pierse Notched Forceps, Dolphin Handle 0.25mm Curved




- Pierce 0.25mm notched, 6mm tying platforms
- Curved shafts
- Dolphin handle, length 94mm



2-103E

Notched Forceps, 0.25mm Curved



- Pierce 0.25mm notched, 6mm tying platforms
- Curved shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001




2-103

Alternative handle design also available.  
Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-104

Pierse Notched Forceps, 0.25mm Straight




- Pierce 0.25mm notched, 6mm tying platforms
- Straight shafts
- Flat handle, length 116mm



2-104E

Pierse Notched Forceps, 0.25mm Straight




- Pierce 0.25mm notched, 6mm tying platforms
- Straight shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001



2-104N

Alternative handle design also available.  
Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-130E




**Pierse Notched Colibri Forceps, 0.25mm**

- Pierse 0.25mm notched, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001




2-130D




**Pierse Notched Colibri Forceps, Dolphin Handle, 0.25mm**

- Pierse 0.25mm notched, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- Dolphin handle, length 94mm



2-200E



**Pierse Notched Colibri Forceps, 0.25mm**

- Pierse 0.25mm notched, tip length 1.5mm
- 6mm tying platforms
- Colibri style shafts
- Micro flat handle, length 77mm
- Design registration number 004383396-0001




2-200

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

**Pierse, 0.3mm Notched**

2-100-1E




**Pierse Notched Forceps, 0.3mm Straight**

- Pierse 0.3mm notched, 6mm tying platforms
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001




**Pierse, 0.65mm Notched**

2-401NR8



**Straight Notched Round Handle Forceps, 0.65mm**

- Pierse 0.65mm notched, 6mm tying platforms
- Straight shafts
- 8mm diameter round handle, length 115mm



2-815E




## Akahoshi Prechopper Forceps

- Tips fully open to 2.5mm
- Smooth pointed tips
- 1.8mm maximum width at incision point
- Straight shafts, reverse cross action style
- Round handle, length 120mm
- Design registration number 004383396-0001



2-817E




## Salvitti Akahoshi Micro Prechopper Forceps (small tip)

- Tips fully open to 2.5mm
- Flattened tips in vertical plane, tip height 1.3mm
- 1.8mm maximum width at incision point
- Straight shafts, reverse cross action style
- Round handle, length 119mm
- Design registration number 004383396-0001



Designed to crack nucleus into four segments with minimal stretching of incision. Forceps shafts open to a maximum of 1.8mm at incision point. Tips open to 2.5mm. Tip of instrument has a sharp point that initially penetrates nucleus; squeeze forceps, tips open to crack and split nucleus. By flipping forceps over, blunt edge may be used to go deeper in initial split to fully split nucleus. Using blunt edge of tip reduces risk of damaging posterior capsule.

2-817-1E



## Salvitti Akahoshi Micro Prechopper Forceps (large tip)

- Tips fully open to 2.5mm
- Flattened tips in vertical plane, tip height 1.5mm
- 1.8mm maximum width at incision point
- Straight shafts, reverse cross action style
- Round handle, length 119mm
- Design registration number 004383396-0001



2-2-817-1

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-818E




## Inamura-Talon Prechopper Forceps

- Tips fully open to 2.5mm
- Flattened tips in vertical plane, tip height 1.6mm
- 1.8mm maximum width at incision point
- Straight shafts, reverse cross action style
- Round handle, length 119mm
- Design registration number 004383396-0001



2-820E



## Paddle Prechopper Forceps Angled 45°

- Tips fully open to 2.5mm
- Arrow tip shape for penetrating nucleus
- Flattened paddle area of tips for nucleus splitting, tip height 1mm
- 1.8mm maximum width at incision point
- 45° angled reverse cross action shaft, tip to angle length 13.5mm
- Round handle, length 115mm
- Design registration number 004383396-0001





2-820-1E




**Paddle Prechopper Forceps**



- Tips fully open to 2.5mm
- Arrow tip shape for penetrating nucleus
- Flattened paddle area of tips for nucleus splitting, tip height 1mm
- 1.8mm maximum width at incision point
- Straight shafts, reverse cross action style
- Round handle, length 119mm
- Design registration number 004383396-0001

2-821E




**CataPulse® Mini Pre-Chopper**



- Tips fully open to 1.9mm
- Flattened tips in vertical plane, tip height 1.5mm
- 1.4mm maximum width at incision point
- Straight shafts, reverse cross action style
- Round handle, length 119mm
- Design registration number 004383396-0001

Suitable for use in conjunction with the CataPulse® Lens Removal System.

2-802E




**Brown Nucleus Cracker**



- 1.1mm x 1.2mm paddle style tips
- 30° angled shafts, tip to angle length 14.5mm
- Flat handle, cross action tips length 114mm
- Design registration number 004383396-0001

2-803E



**Denman Brown Nucleus Cracker**




- 1.1mm x 1.2mm paddle style tips
- Bulge along lower edge of paddle
- 30° angled shafts, tip to angle length 14.5mm
- Flat handle, cross action tips length 114mm
- Design registration number 004383396-0001

Bulge along lower edge of tip reduces risk of paddle slipping out of the nucleus when splitting.

## Plain Tip / Jewellers

2-900E

### Plain Tip Forceps, Straight




- Plain tips without tying platforms
- Straight shaft
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-901

### DK Plain Tip Forceps, Curved




- Curved plain tips without tying platforms
- Curved shafts
- Flat handle, length 87mm



## Retinal

2-877

### Squeeze Handle End Gripping Forceps 23 Gauge




- Fine end gripping tips, tip length 3mm
- Straight 23 gauge tube, tube length 32.5mm



- Squeeze handle activates both jaws
- Round squeeze handle, overall length 140mm

2-878-1

### Squeeze Handle Delicate Serrated Forceps 23 Gauge




- Delicate serrated jaws with blunt tip, tip length 3mm
- Straight 23 gauge tube, tube length 32.5mm



- Squeeze handle activates both jaws
- Round squeeze handle, overall length 139mm

2-879

### Squeeze Handle Asymmetrical Forceps 23 Gauge




- Asymmetrical tip design with fine platform
- Straight 23 gauge tube, tube length 32.5mm



- Squeeze handle activates both jaws
- Round squeeze handle, overall length 138mm

2-877N




**End Gripping Forceps Head 23 Gauge**

- Fine end gripping tips, tip length 3mm
- Straight 23 gauge tube, length 31mm
- Requires DK Squeeze Handle, ref 6-676

- Detachable tip heads for cleaning purposes
- Colour coding for tip and gauge size identification
- Once attached to round squeeze handle, length is 142mm



2-878-1N




**Delicate Serrated Forceps Head 23 Gauge**

- Delicate serrated jaws with blunt tip, tip length 3.5mm
- Straight 23 gauge tube, length 31mm
- Requires DK Squeeze Handle, ref 6-676

- Detachable tip heads for cleaning purposes
- Colour coding for tip and gauge size identification
- Once attached to round squeeze handle, length is 142mm



2-879N



**Asymmetrical Forceps Head 23**

- 2mm jaws, 0.7mm platforms, 55° angled pointed picking tip
- Straight 23 gauge tube, length 31mm
- Requires DK Squeeze Handle, ref 6-676

- Detachable tip heads for cleaning purposes
- Colour coding for tip and gauge size identification
- Once attached to round squeeze handle, length is 140mm



All Interchangeable Vitreoretinal (VR) Heads are sold separate from the handle. The VR Heads require a handle for operation. ONLY the DK Squeeze Handle for VR Instrument Heads, ref 6-676, is suitable. All VR Heads come fitted with a plastic (PEEK) re-usable Protective Cover, that can withstand cleaning and reprocessing cycles. The VR Heads are screwed onto the thread of DK Squeeze Handle for VR Instrument Heads. It is recommended, for device protection, to keep the plastic (PEEK) re-usable protective cover fitted until the instrument is required for use.


6-676

**Squeeze Handle for Vitreoretinal Instrument Heads**

- Suitable for all Duckworth & Kent Vitreoretinal Instrument Heads
- Overall Length 92 mm (without head)
- Squeeze action handle



2-832E



**Cannula Loading Forceps**

- Designed to hold 23 and 25 gauge cannulas
- 45° angled shafts, tip to angle length 6mm
- Flat handle, length 115mm
- Design registration number 004383396-0001




2-2-832

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

**Scleral Pin Holding**

2-831



**DK Scleral Pin Holding Forceps**


- Purpose designed tip to fixate DK Scleral Pins (8-050)
- 30° angled tip, tip to angle length 7mm
- Flat handle, length 115mm



## Toothed, 0.1mm

2-110-1E

### Bonn Suturing Forceps, 0.10mm




- 0.10mm, 1 x 2 teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



## Toothed, 0.12mm

2-110E

### Bonn Suturing Forceps, 0.12mm




- 0.12mm, 1 x 2 teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-110-3E

### Straight Toothed Forceps, 0.12mm




- 0.12mm, 1 x 2 flat teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-111E

### Bonn Curved Suturing Forceps, 0.12mm




- 0.12mm, 1 x 2 teeth, 6mm tying platforms
- Curved shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-114E

### Castroviejo Suturing Forceps, 0.12mm




- 0.12mm, 1 x 2 teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001



2-114ER8

**Straight Toothed Forceps, 0.12mm**




- 0.12mm, 1 x 2 teeth, 6mm tying platforms
- Straight shafts
- Round handle, length 115mm
- Design registration number 004383396-0001




2-114-5NR8

**Ogawa Straight Suturing Forceps, 0.12mm**




- 0.12mm, 1 x 2 teeth, 6mm tying platforms
- Stronger straight shafts
- 8mm diameter long round handle, length 115mm



2-115N

**Straight Toothed Forceps, 0.12mm**




- 0.12mm, 1 x 2 teeth, 6mm tying platforms
- 23° angled shaft 2mm back from tip
- Flat handle, length 115mm

Slightly angled tips provide easy visualisation at point of grasping.



2-132E


**Colibri Toothed Forceps, 0.12mm**



- 0.12mm, 1 x 2 teeth, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



## 2-135E




### Colibri Toothed Forceps, 0.12mm

- 0.12mm, 1 x 2 teeth, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001



## 2-135NR




### Colibri Toothed Forceps, 0.12mm

- 0.12mm, 1 x 2 teeth, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- 10mm diameter round handle, length




## 2-135ER8



### Colibri Toothed Round Handle Forceps, 0.12mm

- 0.12mm, 1 x 2 teeth, tip length 2mm
- 6mm tying platforms
- Colibri style shafts
- Round handle, length 115mm
- Design registration number 004383396-0001

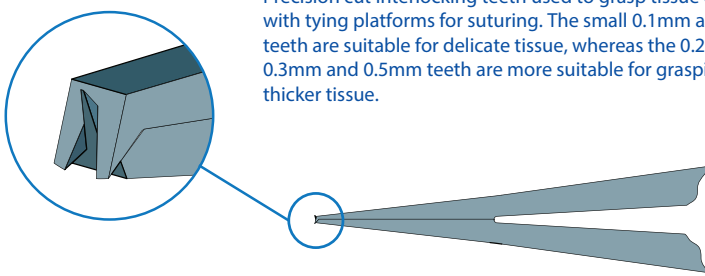


Precision cut interlocking teeth used to grasp tissue combined with tying platforms for suturing. The small 0.1mm and 0.12 teeth are suitable for delicate tissue, whereas the 0.2mm, 0.3mm and 0.5mm teeth are more suitable for grasping thicker tissue.

Toothed sizes available : 0.1mm, 0.12mm, 0.2mm  
0.3mm, 0.5mm




Engraved symbol to identify all toothed tip forceps.

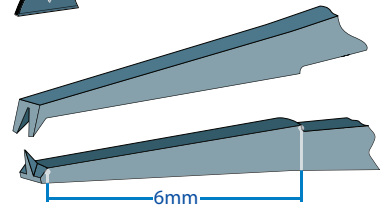

All toothed tip instruments feature a 6mm long tying platform, unless otherwise stated.

2-144E




**McPherson Toothed Forceps, 0.12mm**

- 0.12mm, 1 x 2 teeth, 6mm tying platforms
- 45° angled shafts, tip to angle length 10mm
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-214E




**Troutman-Barraquer Colibri Toothed Forceps, 0.12mm**

- 0.12mm, 1 x 2 teeth, tip length 1.5mm
- 6mm tying platforms
- Colibri style shafts
- Flat handle, length 77mm
- Design registration number 004383396-0001



2-215E



**Troutman-Barraquer Colibri Forceps, 0.12mm**

- 0.12mm, 1 x 2 teeth, tip length 0.8mm
- 6mm tying platforms
- Colibri style shafts
- Micro flat handle, length 77mm
- Design registration number 004383396-0001



## Toothed, 0.3mm

2-116E


### Straight Suturing Forceps, 0.3mm



- 0.3mm, 1 x 2 teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001


2-116

Alternative handle design also available.  
Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)




2-116N

### Straight Suturing Forceps, 0.3mm



- 0.3mm, 1 x 2 teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 115mm




2-118E

### Bonn Suturing Forceps, 0.3mm



- 0.3mm, 1 x 2 teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001





**Toothed, 0.5mm**

**2-108E**

**Rabkin Blepharoplasty Tissue Forceps, 0.5mm**



- 0.5mm, 1 x 2 flat teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001



**2-108**


Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

**2-108N**

**Straight Toothed Forceps, 0.5mm**



- 0.5mm, 1 x 2 flat teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 116mm



**2-117E**

**Castroviejo Suturing Forceps, 0.5mm**



- 0.5mm, 1 x 2 teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001




**2-117**

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

**2-160**

**Troutman Angled Superior Rectus Forceps, 0.5mm**



- 0.5mm, 1 x 2 teeth
- 45° angled shafts, tip to angle length 10mm
- Flat handle, length 113mm



**Oculoplastics**

**2-108E**

**Rabkin Blepharoplasty Tissue Forceps, 0.5mm**



- 0.5mm, 1 x 2 teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001



**2-108**


Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

**2-108N**

**Straight Toothed Forceps, 0.5mm**



- 0.5mm, 1 x 2 teeth, 6mm tying platforms
- Straight shafts
- Flat handle, length 116mm




2-401NR8


Straight Notched Round Handle Forceps, 0.65mm



- Pierce 0.65mm notched, 6mm tying platforms
- Straight shafts
- 8mm diameter round handle, length 115mm



Tying Angled

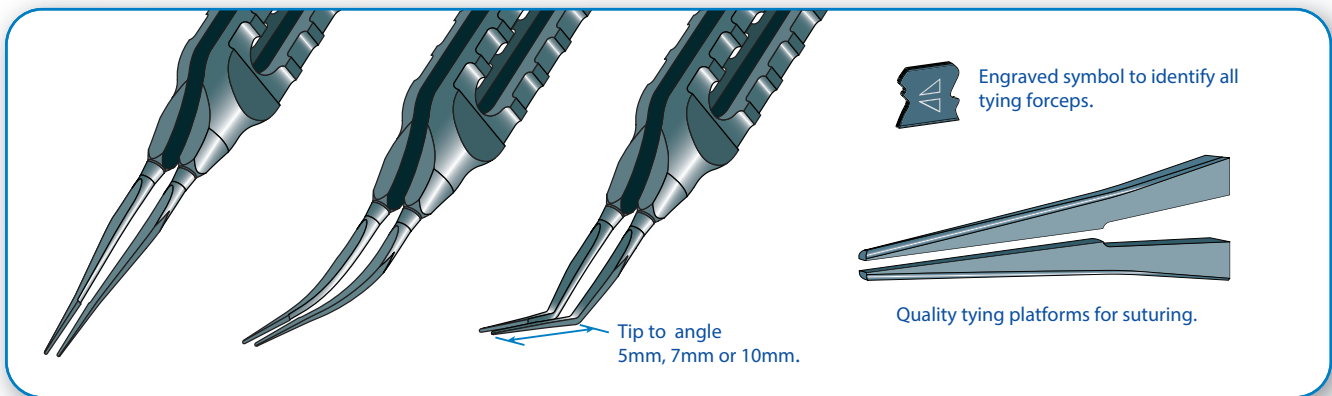

2-520E

Kelman-McPherson Tying Forceps, 5mm tip to angle



- 4mm tying platforms
- 45° angled shafts, tip to angle length 5mm
- Flat handle, length 90mm
- Design registration number 004383396-0001

2-520

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-522E

Kelman-McPherson Tying Forceps, 7mm tip to angle




- 6mm tying platforms
- 45° angled shafts, tip to angle length 7mm
- Flat handle, length 90mm
- Design registration number 004383396-0001

2-522N

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-524D

**Angled Tying Forceps, Dolphin Handle**




- 6mm tying platforms
- 45° angled shafts, tip to angle length 10mm
- Dolphin handle, length 92mm



2-524E

**Kelman-McPherson Tying Forceps**




- 6mm tying platforms
- 45° angled shafts, tip to angle length 10mm
- Flat handle, length 88mm
- Design registration number 004383396-0001



2-524N

**Angled Tying Forceps, 10mm tip to angle**




- 6mm tying platforms
- 45° angled shafts, tip to angle length 10mm
- Flat handle, length 81mm



2-524-1E

**Kelman-McPherson Tying Forceps, 10.5mm tip to angle**




- 9.5mm tying platforms
- 45° angled shafts, tip to angle length 10.5mm
- Flat handle, length 87mm
- Design registration number 004383396-0001



2-524-1N

**Angled Tying Forceps, 10.5mm tip to angle**




- 9.5mm tying platforms
- 45° angled shafts, tip to angle length 10.5mm
- Flat handle, length 81mm



2-526E

**Kelman-McPherson Tying Forceps, 12mm tip to angle**




- 6mm tying platforms
- 45° angled shafts, tip to angle length 12mm
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-527E

**Kelman-McPherson Angled Tying Forceps, 7mm tip to angle**



- 6mm tying platforms
- 45° angled shafts, tip to angle length 7mm
- Flat handle, length 115mm
- Design registration number 004383396-0001




2-527

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-529E

**Kelman-McPherson Tying Forceps, 10mm tip to angle**



- 6mm tying platforms
- 45° angled shafts, tip to angle length 10mm
- Flat handle, length 113mm
- Design registration number 004383396-0001




2-529


Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-529N

**Angled Tying Forceps, 10mm tip to angle**




- 6mm tying platforms
- 45° angled shafts, tip to angle length 10mm
- Flat handle, length 112mm



2-529-1ER8

**Angled Tying Forceps, 10.5mm tip to angle**



- 9.5mm tying platforms
- 45° angled shafts, tip to angle length 10.5mm
- Long round handle, length 112mm
- Design registration number 004383396-0001




2-529-1NR8

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

**Tying, Curved**

2-501E

**Curved Tying Forceps**




- 6mm tying platforms
- Curved shafts
- Flat handle, length 88mm
- Design registration number 004383396-0001



2-501N

Curved Tying Forceps




- 6mm tying platforms
- Curved shafts
- Flat handle, length 83mm



2-505

DK Harms-Tubingen Curved Tying Forceps




- 6mm tying platforms
- Curved shafts
- Flat handle, length 115mm



2-505E

Curved Tying Forceps



- 6mm tying platforms
- Curved shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001




2-505N


Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-505NR

Curved Tying Forceps




- 6mm tying platforms
- Curved shafts
- 10mm diameter round handle, length 114mm



2-505ER8

Curved Tying Round Handle Forceps



- 6mm tying platforms
- Curved shafts
- Round handle, length 115mm
- Design registration number 004383396-0001




2-505NR8

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

**Tying, Straight**

2-500E

McPherson Tying Forceps



- 6mm tying platforms
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001




2-500N

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-500-1E

Straight Tying Forceps




- 6mm tying platforms
- Heavier tip, 0.6mm
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-500-2E

Straight Tying Forceps




- 6mm tying platforms
- Delicate tip, 0.22mm
- Straight shafts
- Flat handle, length 90mm
- Design registration number 004383396-0001



2-504

DK Harms-Tubingen Straight Tying Forceps




- 6mm tying platforms
- Straight shafts
- Flat handle, length 116mm



2-504E

Harms-Tubingen Tying Forceps



- 6mm tying platforms
- Straight shafts
- Flat handle, length 115mm
- Design registration number 004383396-0001




2-504N


Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-504NR

Straight Tying Forceps




- 6mm tying platforms
- Straight shafts
- 10mm diameter round handle, length 115mm



2-504ER8

Straight Tying Round Handle Forceps



- 6mm tying platforms
- Straight shafts
- Round handle, length 115mm
- Design registration number 004383396-0001




2-504NR8

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-504-1NR8

**Straight Tying Forceps**



- 6mm tying platforms
- Straight shafts
- 8mm diameter round handle, length 115mm
- Fine enough for tying 10-0 sutures, yet platforms are broad enough to minimise damage to sutures from compression.
- Broader platform works well for safely rotating sutures to bury the suture knot.




**Laser Protection**

2-660

**Miyata Laser Protection Forceps**

▶ Video Available



- Tip width 1.5mm, closed tip width 3mm
- Curved shafts 45° angled, tip length 7mm
- Flat handle, length 113mm

Designed to be used to hold the conjunctiva of the eye during laser surgery. The wide tips also protect the areas of the eye not being treated by the laser.


Used in conjunction with the Miyata Laser Eye Shields ref: 6-667-7 and 6-667-8.



**ReLEx® SMILE**

2-835E

**NeoVize SMILE Forceps**



- 4mm long serrated jaws
- Tip to angle length 9mm, angled 30°
- Flat handle, overall length 90mm
- Design registration number 004383396-0001

Designed to grasp the lenticule and remove it from the corneal pocket.



2-835


Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-835N

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)

2-836E

**SMILE Lenticule Removal Forceps**




- 4mm long serrated jaws
- 30° angled shafts
- Flat long handle, length 115mm
- Design registration number 004383396-0001



2-837

**SMILE Lenticule Removal Forceps, 23 Gauge**




- Delicate serrated jaws with blunt tip, tip length 3mm
- Curved 23 gauge tube
- Squeeze handle activates both jaws
- Round squeeze handle, length 127mm



2-839

▶ Video Available

### Chan SMILE Dissecting Forceps





- Curved shaft, tip to pivot point 8mm
- Cross action tips, 1.2mm width at pivot box
- Round handle, overall length 107mm

## KAMRA™ Corneal Inlay

2-920

### KAMRA™ Corneal Inlay Insertion Forceps



- Two oval flat shaped tips, width 2.6mm, length 4mm
- Tip to bend 9mm, angled 10°
- Flat handle, length 92mm

The KAMRA™ Corneal Inlay Insertion Forceps are intended to be used to hold the KAMRA™ cornea inlay and insert it through a surgical incision into a lamellar pocket in the cornea.



# Social Media

Its never been easier to stay up to date with Duckworth & Kent

- Keep up to date with the latest news
- Tell us what you think and connect with others
- Be the first to hear about new instruments
- Gain easy access to our monthly newsletter



Connect

Like

Share

Stay connected with  
Duckworth & Kent








# Needle Holders

Jaw Length 7mm  
Jaw Length 9mm  
Jaw Length 12mm  
Miscellaneous

# 3

# Needle Holders

The locking feature is available throughout the range, enabling the needle holder to be transferred with the needle locked in the jaws.

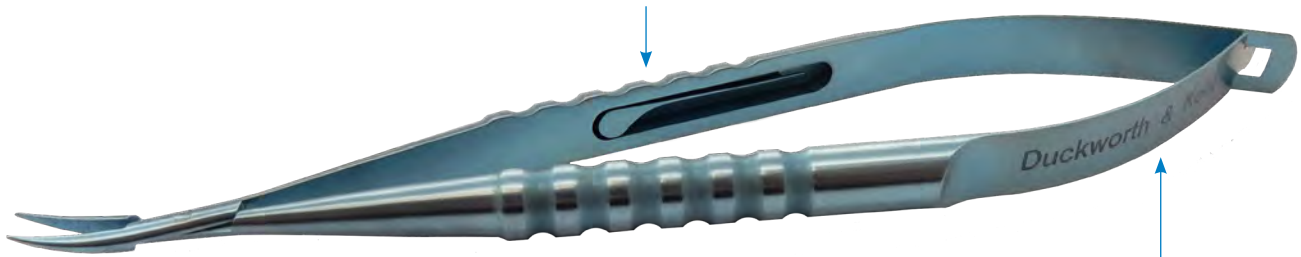

Precision made fine delicate jaws are suitable for the fine sutures used in ophthalmic surgery.

Manufactured from non-magnetic material, the titanium needle holders will never cause adverse reactions to stainless steel needles.

## Jaw Length 7mm

3-205

### DK Needle Holder, Curved

- 7mm delicate curved jaws
- Round handle, tag spring
- Length 108mm



3-206

### DK Needle Holder, Curved with lock

- 7mm delicate curved jaws
- Round handle with lock, tag spring
- Length 108mm



3-207

### DK Needle Holder, Straight

- 7mm delicate straight jaws
- Round handle, tag spring
- Length 108mm



3-208

### DK Needle Holder, Straight with lock


- 7mm delicate straight jaws
- Round handle with lock, tag spring
- Length 108mm



3-218

**Ogawa Needle Holder, Curved**


- 7mm delicate curved jaws
- Ogawa round handle, tag spring
- Length 124mm



3-218-1

**Ogawa Needle Holder, Curved**


- 7mm extra-delicate curved jaws
- Ogawa round handle, tag spring
- Length 124mm



3-420

**Nordan Needle Holder, Curved**

- 7mm delicate curved jaws
- Nordan round handle with flats, hinge spring
- Length 118mm



3-422

**DK Needle Holder, Curved**


- 7mm delicate curved jaws
- Round handle, tag spring
- Length 116mm




3-423

**DK Needle Holder, Curved with lock**

- 7mm delicate curved jaws
- Round handle with lock, tag spring
- Length 119mm

**Jaw Length 9mm**

3-201

**DK Needle Holder, Straight**

- 9mm medium straight jaws
- Round handle, tag spring
- Length 108mm



3-202

**DK Needle Holder, Curved with lock**

- 9mm medium curved jaws
- Round handle with lock, tag spring
- Length 108mm



33-202

DK Needle Holder, Curved with lock



- 9mm medium curved jaws
- Round handle with lock, tag spring
- Length 137mm



3-203

DK Needle Holder, Curved



- 9mm medium curved jaws
- Round handle, tag spring
- Length 108mm



33-203

DK Needle Holder, Curved



- 9mm medium curved jaws
- Round handle, tag spring
- Length 134mm



3-222

DK Needle Holder, Curved with lock



- 9mm medium curved jaws, blunt tip
- Round handle with lock, tag spring
- Length 108mm




33-222

DK Needle Holder, Curved with lock



- 9mm medium curved jaws, blunt tip
- Round long handle with lock, tag spring
- Length 137mm




3-223

DK Needle Holder, Curved



- 9mm medium curved jaws, blunt tip
- Round handle, tag spring
- Length 110mm



33-223

**DK Needle Holder, Curved**

- 9mm medium curved jaws, blunt tip
- Round long handle with tag spring
- Length 137mm



3-302

**DK Barraquer Needle Holder, Curved with lock**

- 9mm delicate curved jaws
- Round handle with lock, hinge spring
- Length 107mm



3-303

**DK Barraquer Needle Holder, Curved**

- 9mm delicate curved jaws
- Round handle, hinge spring
- Length 107mm



33-303

**DK Barraquer Needle Holder, Curved**

- 9mm delicate curved jaws
- Round long handle, hinge spring
- Length 133mm

**Jaw Length 12mm**

33-225

**DK Needle Holder, Curved**


- 12mm heavy curved jaws
- Round long handle, tag spring
- Length 137mm

**Miscellaneous**

3-203-1

**DK Round Handle Needle Holder / Scissors**

- 7mm curved jaw, inside cutting edge
- Cutting blade 3mm long
- Round handle, length 108mm



Designed for large sutures with an inbuilt edge at proximal end of jaw to allow surgeon to cut suture without changing instruments.





# Diamond Knives

Straight Retractable  
Angled Retractable  
Position Handle  
Micrometer  
LRI

4 / 5

## Handle Styles

Many blade and handle configurations are available and not all may be listed. Any special requests please contact Duckworth & Kent directly or contact your local Duckworth & Kent distributor.

### Straight Retractable



- Straight handle with single position fully exposing the diamond
- Thin body allows for easy freehand work

### Angled Retractable



- Angled mounting of the blade makes it easier to guide the cutting edge through


### Micrometer Retractable



- Micrometer of the highest precision, with an easy legible scale
- Blade depth can be set from 0 to 1mm with a scale measuring 0.01mm (10 micron) increments


## Blade Configurations

Blue signifies cutting edge

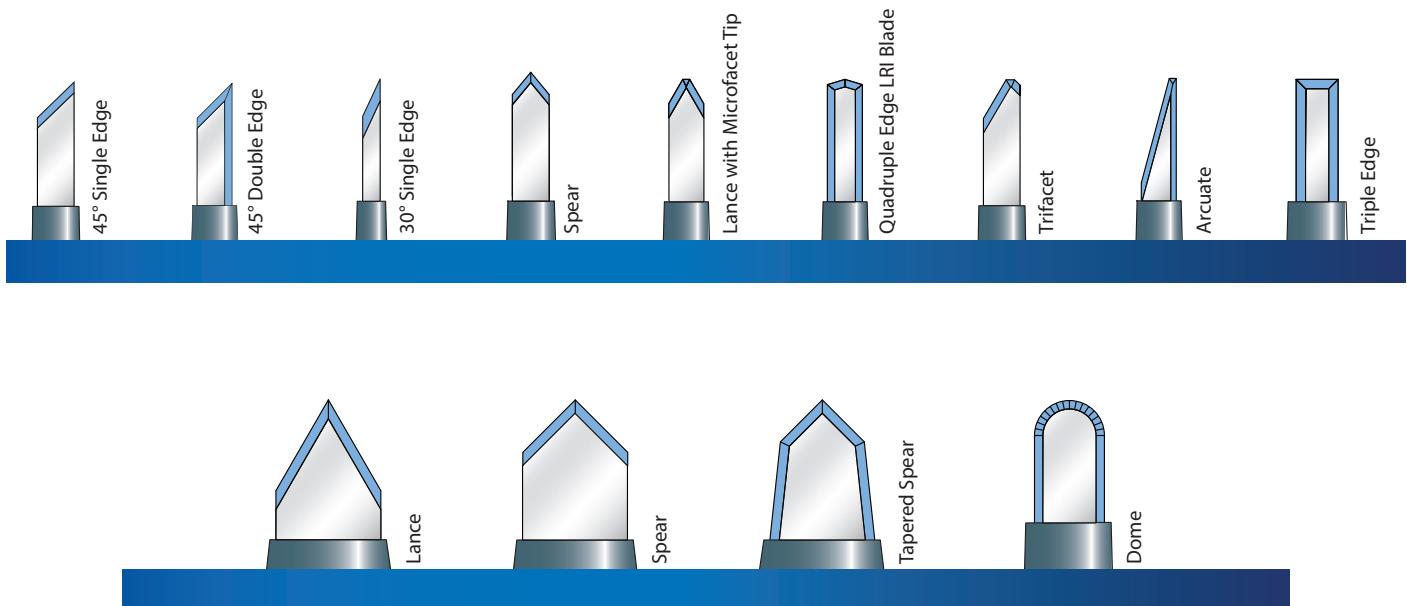

## Straight Retractable

4-100


**DK Retractable Diamond Knife, 1mm 45° Single Edge**

Width 1mm  
Length 3.5mm  
Thickness 0.2mm



- 1mm wide 45° single edge diamond blade
- Retractable long handle, length 124mm

4-115


**DK Retractable Diamond Knife, 1mm Trifacet**

Width 1mm  
Length 3.5mm  
Thickness 0.2mm



- 1mm wide trifacet diamond blade
- Retractable long handle, length 124mm

4-122


**DK Retractable Diamond Knife, 1mm Lance**

Width 1mm  
Length 3.5mm  
Thickness 0.2mm



- 1mm wide lance diamond blade
- Retractable long handle, length 124mm

4-125


**DK Retractable Diamond Knife, 1mm 30° Single Edge**

Width 1mm  
Length 3.5mm  
Thickness 0.2mm



- 1mm wide 30° single edge diamond blade
- Retractable long handle, length 124mm

4-590


**DK Retractable Diamond Knife, 1mm 45° Double Edge**

Width 1mm  
Length 3.5mm  
Thickness 0.2mm



- 1mm wide 45° double edge diamond blade
- Retractable long handle, length 124mm

4-600


**Pearce Retractable Diamond Knife, 1mm 45° Double Edge**

Width 1mm  
Length 3.5mm  
Thickness 0.2mm



- 1mm wide 45° double edge diamond blade
- Second position 10mm shaft extension
- Retractable long handle, length 124mm

4-402




Width 1.8mm  
Length 4mm  
Thickness 0.2mm

- 1.8mm wide spear diamond blade
- 45° angled retractable handle, length 137mm



4-480




Width 2mm  
Length 4mm  
Thickness 0.2mm

- 2mm wide dome shape diamond blade
- Nineteen facets
- 45° angled retractable handle, length 137mm



4-406




Width 2.2mm  
Length 4mm  
Thickness 0.2mm

- 2.2mm wide spear diamond blade
- 45° angled retractable handle, length 136mm



4-415




Width 2.5mm  
Length 4mm  
Thickness 0.2mm

- 2.5mm wide spear diamond blade
- 45° angled retractable handle, length 137mm



4-416


**Angled Retractable Diamond Knife, 2.4mm Spear**

Width 2.4mm  
Length 4mm  
Thickness 0.2mm



- 2.4mm wide spear diamond blade
- 45° angled retractable handle, length 137mm

4-430


**DK Angled Retractable Diamond Knife, 2.8mm Spear**

Width 2.8mm  
Length 4mm  
Thickness 0.2mm



- 2.8mm wide spear diamond blade
- 45° angled retractable handle, length 137mm

4-438


**DK Angled Retractable Diamond Knife, 2.7mm - 2.9mm Tapered**

Width 2.7mm/2.9mm  
Length 4mm  
Thickness 0.2mm



- 2.7mm to 2.9mm tapered spear diamond blade
- 45° angled retractable handle, length 137mm

4-440


**DK Angled Retractable Diamond Knife, 3mm Spear**

Width 3mm  
Length 4mm  
Thickness 0.2mm



- 3mm wide spear diamond blade
- 45° angled retractable handle, length 137mm

4-460


**DK Angled Retractable Diamond Knife, 3.2mm Spear**

Width 3.2mm  
Length 4mm  
Thickness 0.2mm



- 3.2mm wide spear diamond blade
- 45° angled retractable handle, length 137mm

5-300-1




## DK Micrometer Diamond Knife, 1mm 45° Single Edge

Width 1mm  
Length 3mm  
Thickness 0.2mm



- 1mm wide 45° single edge diamond blade
- Micrometer handle, length 105mm
- One division on the scale is 10 microns
- One revolution of the barrel is 500 microns
- Scaled 0-1mm (0-1000 microns)

5-310-1




## DK Micrometer Diamond Knife, 1mm 45° Double Edge

Width 1mm  
Length 3mm  
Thickness 0.2mm



- 1mm wide 45° double edge diamond blade
- Micrometer handle, length 105mm
- One division on the scale is 10 microns
- One revolution of the barrel is 500 microns
- Scaled 0-1mm (0-1000 microns)

5-329-1




## DK Triple Edge Micrometer Diamond Knife, 0.8mm Rectangular

Width 0.8mm  
Length 3mm  
Thickness 0.2mm



- 0.8mm wide triple edge diamond blade
- Micrometer handle, length 105mm
- One division on the scale is 10 microns
- One revolution of the barrel is 500 microns
- Scaled 0-1mm (0-1000 microns)

5-330-1




## Thornton Triple Edge Micrometer Diamond Knife, 1mm Rectangular

Width 1mm  
Length 3mm  
Thickness 0.2mm



- 1mm wide triple edge diamond blade
- Micrometer handle, length 105mm
- One division on the scale is 10 microns
- One revolution of the barrel is 500 microns
- Scaled 0-1mm (0-1000 microns)

## 5-340-1


**DK Micrometer Diamond Knife, 1mm 35° Bifacet**

Width 1mm  
Length 3mm  
Thickness 0.2mm

- 1mm 35° bifacet diamond blade
- 0.2mm (200 microns) flat at tip
- 35° cutting edge
- Micrometer handle, length 105mm
- One division on the scale is 10 microns
- One revolution of the barrel is 500 microns
- Scaled 0-1mm (0-1000 microns)



## 5-360-1


**Thornton Micrometer Diamond Knife, 1mm Triple Edge Arcuate**

Width 1mm  
Length 3mm  
Thickness 0.1mm

- 1mm triple edge arcuate diamond blade
- 0.1mm (100 microns) blade thickness
- Micrometer handle, length 105mm
- One division on the scale is 10 microns
- One revolution of the barrel is 500 microns
- Scaled 0-1mm (0-1000 microns)

**Blade Depth Setting Instructions**


5-300-1, 5-310-1, 5-329-1, 5-330-1, 5-340-1, 5-360-1

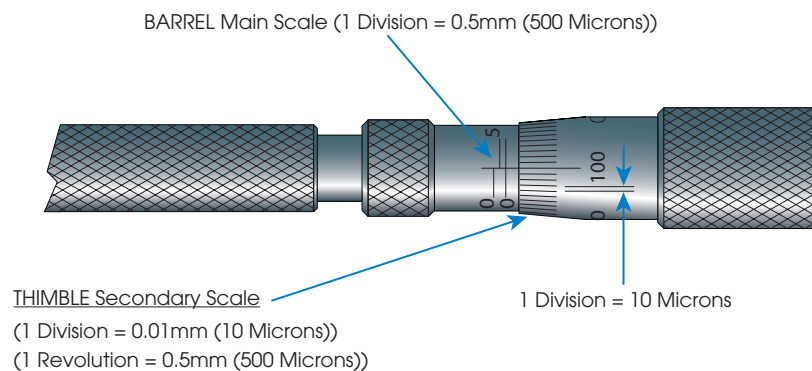

TO SET THE BLADE DEPTH. If a blade depth of 600 microns is required, the main scale on the barrel will need to be set at 500 microns and the secondary scale on the thimble will need to be set at 100 microns. The addition of the 2 scales will give the correct depth.

i.e.: Main scale + Secondary scale = Total depth  
e.g.: 500 + 100 = 600 microns

## DK Thornton Micrometer Diamond Knife, 0.5mm Triple Edge Arcuate




Width 0.5mm  
 Length 3.5mm  
 Thickness 0.1mm



- 0.5mm triple edge arcuate diamond blade
- 0.2mm (200 microns) flat at tip
- Upper side facet, 0.2mm (200 microns) in length
- 0.1mm (100 microns) blade thickness
- Micrometer handle, length 105mm
- One division on the scale is 10 microns
- One revolution of the barrel is 500 microns
- Scaled 0-1mm (0-1000 microns)

## Blade Depth Setting Instructions

5-362

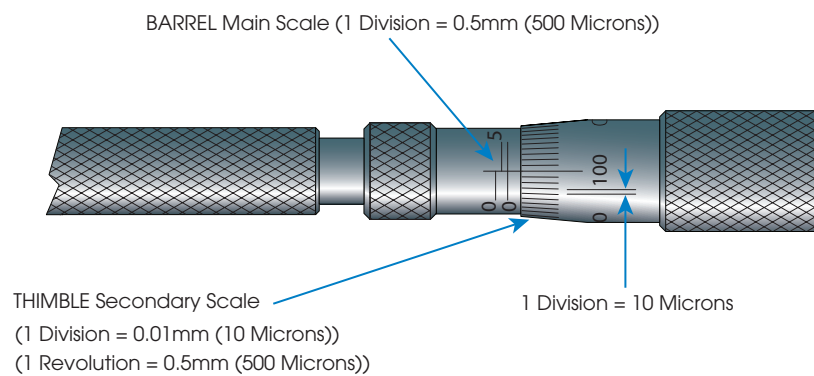

TO SET THE BLADE DEPTH. If a blade depth of 600 microns is required, the main scale on the barrel will need to be set at 500 microns and the secondary scale on the thimble will need to be set at 100 microns. The addition of the 2 scales will give the correct depth.

i.e.: Main scale + Secondary scale = Total depth  
 e.g.: 500 + 100 = 600 microns




## LRI

4-620

4-620-2

4-620-3

4-620-4

**Wallace LRI Diamond Knife, 1mm Lance** (600 micron preset blade depth)**4-620-2** (550 micron preset blade depth)**4-620-3** (500 micron preset blade depth)**4-620-4** (450 micron preset blade depth)


Width 1mm  
Length 0.6mm  
Thickness 0.2mm

- 0.2mm front flat tip
- Blade preset at 600 microns
- Retractable handle, length 120mm



Single footplate allows easier visibility of knife as it passes through corneal tissue. Handle designed for finger twirling as blade follows arcuate pattern of the limbus.

4-621




Width 1mm  
Length 0.6mm  
Thickness 0.2mm

- 0.2mm front flat at tip
- Blade preset at 600 microns
- Footplate designed to fit inside degree marker
- Distance from footplate to centre of diamond blade is 500 microns (0.5mm)
- Retractable long handle, length 118mm




Single footplate allows easier visibility of blade. Profile of footplate locates on the inside of the Packard LRI degree marker / fixation (9-706 Series), which is used as a guide, giving greater control and a uniform incision.

5-305-1



Width 1mm  
Length 3.5mm  
Thickness 0.2mm

- 1mm lance diamond blade
- 0.2mm (200 microns) front flat tip diamond
- Micrometer handle, length 105mm
- One division on the scale is 10 microns
- One revolution of the barrel is 500 microns
- Scaled 0-1mm (0-1000 microns)



# REUSABLE TITANIUM INSTRUMENTS



MANUFACTURED IN ENGLAND


# Hooks, Probes Manipulators and Miscellaneous

Capsule Polishers  
Cataract Support System  
Choppers / Dividers / Hooks / Manipulators / Rotators  
Clamps  
Curettes  
Depressors  
Disruptors  
Dissectors  
Eye Shields  
Fixation Hooks  
Keratometers  
Lacrimal Probes / Dilators  
Lens Loop / Nucleus Expressor  
Muscle Hooks  
Refractive  
ReLEx® SMILE  
Retractors  
Scleral Support System  
Spatulas



Horizontal Chopping

During the horizontal chop technique the lens nucleus is held in position using relatively high vacuum by the phacoemulsification tip buried in the centre of the nucleus. The horizontal chopper is passed under the distal edge of the anterior capsulotomy and around the lens equator, then drawn through the lens nucleus toward the phaco handpiece in the horizontal plane. The phaco tip and chopper are separated laterally, breaking the nucleus into two pieces. The horizontal choppers have a cutting edge which enables the chopper to cut through the nucleus in a specific direction.

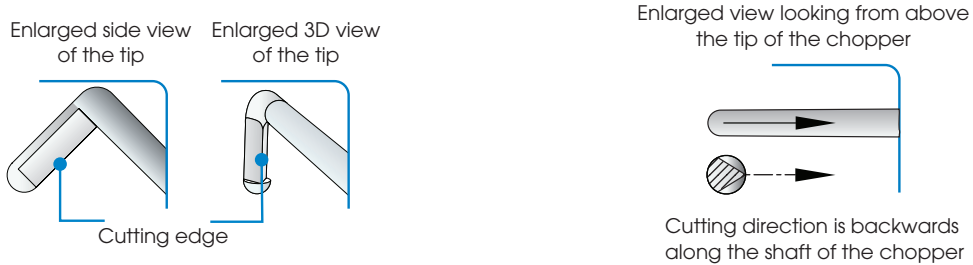


6-071



**Scott Femto Chop**

- Curved, smooth round tip
- Tip to angle length 10mm
- 45° angled shaft
- Round handle, length 120mm
- 0.45 constant diameter shaft to reduce leakage



Designed for the lens that has been femtosecond laser treated and is being removed with zero or little ultrasound power. Scott Femto Chop Technique and Scott Endolenticular Viscodissection involve segmenting the lens along the femto segment treatment lines and then using the curve of the tip to manipulate the segments into the central anterior chamber. The curve also avoids inadvertent damage to the capsule. While removing the segments, the curve of the chop is placed in close proximity to the phaco tip and protects the tip from contact with the capsule. The shaft of the chop is a consistent diameter and helps control fluid egress, helping to stabilise the anterior chamber.

6-072-1




**Bordeianu Chopper, 1.75mm**

- Tip length 1.75mm
- Sharp inner sides of tip
- Tip to angle length 10mm
- Cutting edge 60° to axis
- 60° angled shaft
- Round handle, length 124mm



Designed for use as a horizontal and oblique nucleus chopper, the cutting segment of the chopper extends around the bend and along the horizontal shaft. The chopper tip is inclined back towards the nucleus to ensure the capture of even hard nuclei. May be used as a nucleus sustainer, the ball at the base of the chopper is smooth to protect the posterior capsule. The leading edge of the chopper is smooth which is ideal for iris manipulation. The horizontal shaft has a 0.55mm parallel diameter to reduce leakage through a 23 gauge incision.

6-074-1

**Araslan Nucleus Chopper and Spatula, designed for left side port****Nucleus Cutter**

- Sharp point, tip length 1.2mm
- Cutting edge 30° to axis
- 60° angled curved shaft, tip to angle length 9.8mm

**Spatula**

- 0.4mm diameter blunt tip spatula
- 45° angled shaft, tip to angle length 11mm
- Round handle, length 119mm

6-074-2


**Parmar Straight Vertical Chopper**

- Sharp point
- Tip length 0.75mm
- Cutting edge 0° to axis
- 45° angled shaft
- Tip to angle length 10mm
- Round handle, length 116mm



The short length of tip allows for safe direct vertical chopping and manoeuvrability compared to longer tipped instruments.

6-075

**Packard 'Fat Boy' Nucleus Chopper and Capsule Retractor****Nucleus Cutter**

- Straight, sharp inner sides of tip
- Tip length 1.26mm
- Cutting edge 0° to axis
- Tapered shaft seal incision site to reduce leakage
- 50° angled shaft, tip to angle length 10mm

**Retractor**

- 0.25mm tip
- Tapered shaft seal incision site to reduce leakage
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 130mm

6-075-1

**Packard 'Fat Boy' Nucleus Cutter**

- Straight, sharp inner sides of tip
- Tip length 1.24mm
- Cutting edge 0° to axis
- 50° angled shaft with slight curve
- Tip to angle length 10mm
- Round handle, length 118mm




6-076

**Rosen Nucleus Divider, designed for left side port**

- Straight, sharp inner sides of tip
- Tip length 0.8mm
- Cutting edge 45° to axis
- 45° angled shaft
- Tip to angle length 10mm
- Round handle, length 119mm




6-077




**DK Nucleus Divider, designed for left side port**

- Straight, sharp inner sides of tip
- Tip length 1.45mm
- Cutting edge 45° to axis
- 45° angled shaft
- Tip to angle length 10.5mm
- Round handle, length 120mm



6-079




**Green Nucleus Divider, designed for left side port**

- Curved, sharp inner sides of tip
- Tip length 1mm
- Cutting edge 45° to axis
- 65° angled shaft
- Tip to angle length 9mm
- Round handle, length 117mm



6-079-1




**Green Nucleus Divider, designed for right side port**

- Curved, sharp inner sides of tip
- Tip length 1mm
- Cutting edge 45° to axis
- 65° angled shaft
- Tip to angle length 9mm
- Round handle, length 117mm




6-080



**DK Nucleus Divider**

- Straight, sharp inner sides of tip
- Tip length 1.25mm
- Cutting edge 0° to axis
- 45° angled shaft
- Tip to angle length 14mm
- Round handle, length 122mm



6-080-2



**DK Nucleus Divider / Rotator**

Nucleus Divider

- Straight, sharp inner sides of tip, tip length 1.25mm
- Cutting edge 0° to axis
- 45° angled shaft, tip to angle length 14mm

Nucleus Rotator

- 1.25 x 1mm blunt tip
- 45° angled shaft, tip to angle length 10mm
- Round handle, overall length 129mm



6-080-3




**Findl Nucleus Chopper**


- Straight, sharp inner sides of tip, tip length 1.25mm
- Cutting edge 0° to axis
- Parallel shaft to reduce leakage
- 45° angled shaft, tip to angle length 14mm
- Round handle, overall length 122mm




6-081

**DK Nucleus Divider, designed for left side port**


- Straight, sharp inner sides of tip
- Tip length 1.25mm
- Cutting edge 45° to axis
- 45° angled shaft
- Tip to angle length 14mm
- Round handle, length 122mm




6-081-3

**DK Nucleus Cutter, designed for left side port**

- Straight, sharp inner / outer sides of tip
- Tip length 1.25mm
- Cutting edge 30° to axis
- 45° angled shaft
- Tip to angle length 10.5mm
- Round handle, length 119mm




6-083

**Hara Nucleus Divider, straight, designed for left side port**

- Straight, sharp inner sides of tip
- Tip length 1.1mm
- Cutting edge 45° to axis
- 45° angled shaft
- Tip to angle length 11mm
- Round handle, length 116mm



6-083-1

**Hara Nucleus Divider, curved, designed for left side port**

- Curved, sharp inner sides of tip
- Tip length 1.1mm
- Cutting edge 35° to axis
- 45° angled shaft
- Tip to angle length 11mm
- Round handle, length 115mm



6-083-4

**Double Ended Nucleus Chopper and Manipulator****Chopper**


- Curved sharp inner sides of tip, tip length 1.4mm
- Cutting edge 70° to axis
- Tip to angle length 13.5mm

**Manipulator**

- Highly polished mushroom rotator
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 122mm



6-083-5



### Sibillio Nucleus Chopper & Manipulator




#### Chopper

- Straight sharp inner sides of tip, tip length 1.25mm
- Cutting edge 60° to axis
- Tip to angle length 11mm


#### Manipulator

- 45° angled shafts
- Tip to angle length 11mm
- Round handle, length 132mm


The thinner profile of the chopper facilitates ease of insertion under the capsule whilst maintaining maximum strength of the chopper tip.



6-085



### Barrett Duo Nucleus Rotator / Manipulator / Splitter




#### Nucleus Splitter

- Straight, sharp inner / outer sides of tip
- Tip length 1.25mm
- Cutting edges 60° to axis
- 45° angled shaft, tip to angle length 14mm

#### Rotator / Manipulator

- 0.65mm mushroom tip
- 45° angled shaft, tip to angle length 10mm
- Barrett balanced set handle, length 124mm

Smooth tip manipulator is useful as a nucleus rotator / manipulator in four quadrant nucleo fractis techniques. End of manipulator is ideal for retracting iris during phacoemulsification and inserting IOL implants. Nucleus Splitter used during phacoemulsification techniques such as phaco chop and modified phaco chop procedures.



6-085-1



### Barrett Duo Nucleus Rotator / Manipulator / Splitter




#### Nucleus Splitter


- Straight, sharp inner / outer sides of tip
- Tip length 1.25mm
- Cutting edges 60° to axis
- 45° angled shaft, tip to angle length 14mm

#### Rotator / Manipulator

- 0.65mm mushroom tip
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 130mm



6-085-3



### DK Nucleus Divider / Rotator



#### Nucleus Divider

- Straight, sharp inner sides of tip, tip length 1.25mm
- Cutting edges 60° to axis
- 45° angled shaft, tip to angle length 14mm




#### Nucleus Rotator

- 1.25 x 1mm blunt tip
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 129mm





6-085-6





**DK Barrett Nucleus Divider and Chopper****Nucleus Divider**

- Blunt ended tip with straight, sharp inner sides
- Tip length 1.25mm
- Cutting edges 60° to axis
- 45° angled shaft, tip to angle length 14mm

**Nucleus Divider**

- Sharp edge at base of tip
- Tip length 1.25mm
- 45° angled shaft, tip to angle length 10mm
- Barrett balance set handle, length 125mm

6-085-7




**Barrett Phaco-Axe and Horizontal Chopper****Nucleus Divider, Horizontal Chopping**

- Straight, sharp inner / outer sides of tip
- Tip length 1.25mm
- Cutting edge 60° to axis, left or right side port
- 45° angled shaft, tip to angle length 14mm

**Barrett Phaco-Axe, Vertical Chopping**

- 0.75mm x 0.75mm axe
- Axe direction suitable for a left handed surgeon
- 45° angled shaft, tip to angle length 10mm
- Barrett balanced set handle, length 125mm

6-085-8

**Double Ended Nucleus Chopper and Rotator****Nucleus Divider, Horizontal Chopping**

- Straight, sharp inner / outer sides of tip
- Tip length 1.25mm
- Cutting edge 60° to axis
- 45° angled shaft, tip to angle length 14mm

**Nucleus Rotator**

- 1 x 0.5mm blunt tip
- 45° angled shaft, tip to angle length 10mm
- Barrett balanced set handle, length 125mm

6-086


**Inamura Nucleus Divider / Manipulator, designed for right side port****Nucleus Divider**

- Straight, sharp inner sides of tip, tip length 1.1mm
- Cutting edge 45° to axis, angled left
- 45° angled shaft, tip to angle length 11mm

**Manipulator**

- 0.55mm ball shaped tip
- 45° angled shaft, tip to angle length 11mm
- Round handle, length 129mm

6-086-1



**Inamura Nucleus Divider / Manipulator, designed for left side port**

Nucleus Divider


- Straight, sharp inner sides of tip
- Tip length 1.1mm
- Cutting edge 45° to axis, angled right
- 45° angled shaft, tip to angle length 11mm

Manipulator

- 0.55mm ball shaped tip
- 45° angled shaft, tip to angle length 11mm
- Round handle, length 129mm



6-086-5



**Jakobsen-Barrett Nucleus Cutter and Rotator, designed for left side port**

Nucleus Divider


- Blunt ended tip with straight, sharp inner sides
- Tip length 1mm
- Cutting edge 15° to axis
- 45° angled shaft, tip to angle length 10mm

Nucleus Rotator

- 0.65 highly polished mushroom
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 126mm



6-086-6



**DK Nucleus Cutter and Repositor, designed for left side port**

Nucleus Cutter


- Straight, sharp inner sides of tip
- Tip length 1.25mm
- Cutting edge 45° to axis
- 45° angled shaft, tip to angle length 14mm

Repositor

- 0.5mm diameter blunt tip spatula
- 45° angled shaft, tip to angle length 14mm
- Round handle, length 132mm



6-086-4




**Inamura RACE Hook - Right Hand**

- Tip to angle length 0.5mm
- Tip length, angle to angle, 1.5mm
- 40° angle to tip length 9mm
- Round handle, length 119mm

▶ Video Available




6-086-7




**Inamura RACE Hook - Left Hand**

- Tip to angle length 0.5mm
- Tip length, angle to angle, 1.5mm
- 40° angle to tip length 9mm
- Round handle, length 119mm



6-091



**DK Double Ended Nucleus Divider and Rotator**

Nucleus Divider

- Straight, sharp inner / outer sides of tip, tip length 1.25mm
- Cutting edges 60° to axis
- 45° angled shaft, tip to angle length 14mm

Rotator

- 0.67mm forked style tip
- 45° angled shaft, tip to angle length 9mm
- Round handle, length 127mm



## Vertical Chopping

Vertical chop is a variant of the horizontal chop technique in which the chopper is not passed horizontally around the lens equator, but rather enters the nucleus vertically near the centre of the lens. The vertical chop technique benefits from good visualisation of the chopper throughout the procedure and the avoidance of proximity to the capsular bag, resulting in increased safety.

The Phaco-Axe is a wedge-shaped instrument designed to produce a quick vertical crack of the nucleus during phacoemulsification. The wedge produces a fracture in the vertical plane of the nucleus along fault lines that exist aligned with the lens. The axe manoeuvre consists of 4 steps, which occur in rapid sequence so that it appears as one fluid movement.

**Step 1.** The initial step is to engage the nucleus deeply to at least 50% of the nuclear thickness. A small amount of phaco energy is required to embed the nucleus, which is then held with vacuum alone. The phaco tip should not advance significantly beyond the centre of the nucleus so that there is sufficient space to place the axe in front of the tip.

**Step 2.** The axe is then moved vertically downwards just in front of and adjacent to the phaco tip to initiate a vertical cleft in the nucleus.

**Step 3.** The phaco tip moves in an upward and outward motion separating the segment of nucleus away from the axe, which holds the remainder of the lens in position and extending the vertical cleft created by the axe into a crack.

**Step 4.** The final motion is to separate the axe and the phaco tip to propagate the crack through the full thickness of the lens. The initial crack tends to propagate along the entire lens and is not confined to one quadrant as tends to occur with initial sculpting and cracking associated with divide and conquer techniques.


After the quick vertical crack the segment is engaged on the phaco tip and is removed with the application of ultrasound energy. The axe is well suited to rotating the nucleus for the next vertical crack. The entire axe manoeuvre is performed within the margins of the capsulorhexis unlike horizontal chopping procedures where access to the lens equator under the rhexis is required. High vacuum levels are therefore not necessary to engage the nucleus as in conventional chopping procedures where the chopper tends to displace the segment of nucleus from the phaco tip. A mushroom manipulator is better suited for manipulating epinuclear material and this is provided on the other end of the phaco axe. The technique is well suited to Dual Linear systems where the linear control of phacoemulsification and aspiration allows the surgeon to simultaneously control these parameters and use just the required energy and aspiration to embed the phaco tip and remove each segment of nucleus. The Phaco-Axe produces a quick vertical crack of the nucleus, which allows the surgeon to rapidly fracture and remove a cataract with less energy than conventional nucleofractis techniques and with greater safety and precision than other chopping manoeuvres.

6-069

▶ Video Available



### Daphna Vertical Chopper



- 2 x vertical choppers
- 1.3mm length x width 0.45mm & 0.9mm length x width 0.5mm
- 45° angled shaft, tip to angle length 10mm
- Designed for the left side port
- Barrett balance handle, length 115mm




6-085-2

▶ Video Available



### Barrett Phaco-Axe with Mushroom Rotator, designed for left side port




#### Rotator

- 0.65 highly polished mushroom rotator
- 45° angled shaft, tip to angle length 10mm
- Barrett balance handle, length 122mm

#### Phaco-Axe

- 0.75 x 0.75mm axe
- Axe direction suitable for a right handed surgeon
- 45° angled shaft, tip to angle length 10mm



6-085-4



### Barrett Phaco-Axe with Mushroom Rotator, designed for right side port




#### Rotator

- 0.65 highly polished mushroom rotator
- 45° angled shaft, tip to angle length 10mm
- Barrett balance handle, length 122mm




#### Phaco-Axe

- 0.75 x 0.75mm gold axe
- Axe direction suitable for a left handed surgeon
- 45° angled shaft, tip to angle length 10mm



6-085-7

### Barrett Phaco-Axe and Horizontal Chopper



#### Nucleus Divider, Horizontal Chopping


- Straight, sharp inner / outer sides of tip
- Tip length 1.25mm
- Cutting edge 60° to axis, left or right side port
- 45° angled shaft, tip to angle length 14mm

#### Barrett Phaco-Axe, Vertical Chopping

- 0.75mm x 0.75mm axe
- Axe direction suitable for a left handed surgeon
- 45° angled shaft, tip to angle length 10mm
- Barrett balanced set handle, length 125mm

6-087

### Mackool Phaco Chopper



- Tip length 0.6mm
- 45° angled shaft, tip to angle length 10mm
- Straight miniature 0.3mm diameter ball shaped tip
- Round handle, length 119mm

6-087-1

### Mackool Double Ended Phaco Chopper and Spatula



#### Chopper

- Straight miniature 0.4mm ball shaped tip
- Tip length 0.7mm
- 45° angled shaft, tip to angle length 10mm

#### Spatula

- 0.4mm diameter blunt tip spatula
- 50° angled shaft, tip to angle length 11mm
- Round handle, length 114mm

6-090


### DK Nucleus Divider Hook



- Straight, bulbous shape flat tip
- Tip width 0.62mm, length 0.9mm
- 35° angled shaft, tip to angle length 11mm
- Round handle, length 114mm

6-090-2


### Kozaki Dividing Hook



- Dividing hook, 1.1mm length by 0.6mm wide
- 40° angled shaft, tip to angle length 11mm
- Round handle, length 114mm

6-090-3


▶ Video Available

**Sugiura Central Divider**

- Paddle shape divider, tip 1.7mm long by 0.6mm wide
- Curved shaft at 45° angle, tip to angle length 10mm
- Round handle, length 113mm



6-090-4

**DK Nucleus Divider**

- Paddle shape divider, tip 1.25mm long by 0.6mm wide
- Straight shaft at 35° angle, tip to angle length 11mm
- Round handle, length 115mm



6-090-6



**Wada Nucleus Dividing Hook**

- Paddle shape divider, tip 1.35mm long by 0.6mm wide
- Straight shaft at 40° angle, tip to angle length 11mm
- Thinner dividing edge on right side (for use through left side port)
- Round handle, length 114mm



6-090-7

6-090-8

**Rana/Ota Nucleus Dividing Hook**

- Vertical paddle shaped divider with slot, 1.75mm length - 6-090-7
- Vertical paddle shaped divider with slot, 1.4mm length - 6-090-8
- Straight shaft at 40° angle, tip to angle length 11mm
- Round handle, length 114mm



6-093

**DK Nucleus Divider**

- Straight, blunt tip, tip length 1mm
- 45° angled shaft, tip to angle length 12mm
- Round handle, length 121mm



6-095

**Akahoshi Nucleus Sustainer**

- 0.5mm diameter bulbous tip, tip length 1.7mm
- 45° angled shaft, tip to angle length 10mm
- Short round handle, length 109mm



Placed to sustain nucleus. Used in conjunction with prechopping series of forceps.

6-099




## Mackool-Barraquer Spatula

- 0.45mm width, 0.25mm thickness
- Angled shaft, tip to angle length 15mm
- Round handle, length 116mm

Blunted 0.45mm tip, modified shape and design in order to minimise incision leakage during use and reduce risk of posterior capsule damage.



6-099-1



## DK Iris Repositor

- 0.45mm width, 0.25mm thickness
- Angled shaft, tip to angle length 15mm
- Highly polished internal face of curved tip
- Round handle, length 121mm



6-099-2



## DK Spatula

- 0.5mm width, 0.2mm thickness
- Angled shaft, tip to angle length 10mm
- Highly polished underside of blade
- Round handle, length 120mm



6-099-3




## Anwar Keratoplasty Spatula

- 0.25 diameter blunt tip
- Tip tapered from 0.5mm diameter
- Angled shaft, tip to angle length 7mm
- Round handle, length 115mm

Short and firm spatula with a polished tip that facilitates lamellar dissection / delineation or insertion into the pre-Descemet's plane. The tip is tapered from 0.5 to 0.25mm diameter and allows tenting up of the final corneal lamella for a safe split by a sharp metal blade.



6-099-4



## DK Spatula


- 0.5mm width, 0.2mm thickness
- Curved shaft, tip to angle length 10mm
- Highly polished underside of blade
- Round handle, length 121mm



6-100

**DK Castroviejo Style Cyclodialysis Spatula**

- Blade width 0.7mm
- Slightly curved shaft
- 13mm, 0.25mm thick curved spatula blade
- Round handle, length 118mm



6-101

**DK Barraquer Style Iris Spatula**


- Blade width 0.25mm
- 15mm angled spatula blade
- Round handle, length 115mm




6-102

**DK Castroviejo Style Double Ended Synechia Spatula**



- 0.5mm width, 10mm and 15mm angled spatula blades
- Round handle, length 130mm



6-103-1

**DK Double Ended Spatula, for repositioning epithelial flap**

- 0.8mm diameter, double ended, one curved and one straight
- 45° angled shaft, tip to angle length 12mm
- Round handle, length 127mm




6-105-1

**Double Ended Spatula****Rounded tip**

- 0.60mm tip
- 45° angled shaft, tip to angle length 8mm

**Flattened tip**

- 0.2mm x 0.5mm highly polished
- 45° angled shaft, tip to angle length 8mm
- Round handle, length 123mm



6-107

**DK Rounded Spatula**

- 0.3mm x 0.65mm round tip
- 45° angled curved shaft
- Tip to angle length 11mm
- Round handle, length 121mm



6-848

Krochings Femto Incision Opening Spatula





Femto Spatula

- Fine flat tip, 0.5mm width
- 4mm slightly curved spatula blade
- Opens primary and secondary femto created incisions

Femto Spatula

- 4mm slightly curved spatula blade
- Fine point, 0.5mm wide x 0.5mm
- 90° angled tip
- Opens limbal relaxing incisions (LRI)
- Round handle, length 119mm



6-850

Cionni Femto Spatula and Nucleus Divider





Femto Spatula

- Fine point, 0.5mm width
- 3mm spatula blade
- Opens primary and secondary femto created incisions

Nucleus Divider

- Blade 1.6mm x 0.8mm
- Used for pushing and pulling the iris or anterior capsule edge
- Round handle, length 131mm



**Iris Retractors, Cataract Support System and Sterilising Cases**

6-130

Mackool Iris Retractor

- Tip to block length 3.17mm
- Supplied individually




6-140

Mackool Cataract Support System

[▶ Video Available](#)

- (6 to 8 recommended)
- 0.3mm x 2.8mm hook
- Supplied individually



6-135

Mackool Holder and Sterilising Case

6-135-1

Mackool Holder and Sterilising Case

- External dimensions: 19mm diameter, 12mm height
- Internal dimensions: 15mm diameter, 10mm height
- 6-135 - Made from titanium
- 6-135-1 - Made from Ultem, a semi-transparent orange coloured plastic

6-138

Sterilising Case for Retinal Cannula Plugs

- External dimensions: 19mm diameter, 13mm height
- Secures up to 8 cannula plugs
- Made from Ultem, a semi-transparent orange coloured plastic



6-135



6-135-1






## Hooks / Manipulators / Rotators

6-112

Anwar Keratoplasty Hook

- 0.18mm diameter tip for 1mm length
- Flat face at tip
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 119mm



6-124

Osher Iris Tuck Eliminator

- 0.18mm x 0.6mm Hook
- Curved shaft, tip to curve length 10.5mm
- Round handle, length 119mm

Designed to prevent iris tuck with an anterior chamber IOL by flex, lift and reposit. Very useful in explantation of posterior chamber IOL.



6-245

Double Ended Sinskey Hook

- 2 x 0.2mm diameter tips
- Angled shafts, tip to angle length 10mm
- Round handle, length 125mm



6-249

DK Delicate Sinskey Hook

- 0.12mm diameter
- Angled shaft, tip to angle length 10mm
- Round handle, length 119mm



6-250

DK Sinskey Hook

- 0.18mm diameter tip pointing down
- Angled shaft, tip to angle length 10mm
- Round handle, length 119mm




6-250-1

DK Sinskey Hook (reverse)

- 0.18mm diameter tip pointing up
- Angled shaft, tip to angle length 10mm
- Round handle, length 118mm




6-250-2




**Güell Reverse Sinskey Hook, Flat Shaft**

- 0.22mm diameter rounded tip pointing up
- Tip height 0.7mm, angled 90°
- Angled flat shaft, tip to angle length 10mm
- Round handle, length 119mm



6-251



**DK Sinskey Hook**

- 0.18mm diameter
- Straight shaft
- Round handle, length 121mm




6-256



**Güell Descemet's Scraper**

- Tip width 0.2mm, height 0.45, angled 45°
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 122mm




Used to scrape Descemet's membrane from the underside of the cornea during DSEK.

6-257



**Daya Descemet's Scraper**

- Sharp edges around tip
- Tip width 0.2mm, height 0.5mm
- 45° angled shaft, tip to angle length 14mm
- Round handle, length 122mm



The Daya Descemet's Scraper has a sharp paddle tip that is angled up from the shaft to scrape the Descemet's membrane from within the anterior chamber. The long 14mm shaft allows the tip to go all the way across the cornea with ease.

6-258



**Descemet's Spatula**

- Pointed tip
- Tip length 0.5mm, diameter 0.2mm
- 45° angled curved shaft length 14mm
- Round handle, length 117mm




The Descemet's spatula is used to score a circular pattern into the Descemet's membrane without leaving the anterior chamber. Using a ring marker (9-781 8mm or 9-788 9mm) a circular template can be marked on the external surface of the cornea.

6-400




**Kuglen Iris Hook and IOL Manipulator**

- 0.76mm x 0.75mm x 0.25mm rotator tip
- Push, pull style
- Angled shaft, tip to angle length 9mm
- Round handle, length 122mm




6-400-1

**Mackool-Kuglen Hook and IOL Manipulator**

- 0.88mm x 0.86mm x 0.25mm rotator tip
- Push, pull style
- Angled shaft, tip to angle length 9mm
- Round handle, length 118mm



6-411

**IOL Manipulator**

- 0.8mm diameter disc, 0.3mm thick
- Textured underside of disc
- Curved shaft, tip to curve length 11mm
- Round handle, length 117mm




6-417

**Ogawa Standard IOL Manipulator**

- 0.5mm diameter tip
- Angled shaft, tip to angle length 11mm
- Round handle, length 119mm



6-418

**Ogawa Miniature IOL Manipulator**

- 0.3mm diameter tip
- Angled shaft, tip to angle length 11mm
- Rotates and manoeuvres IOLs as well as cataract nucleus
- Round handle, length 119mm




6-418-1

**Ogawa Straight Miniature IOL Manipulator**


- 0.3mm diameter tip
- Straight shaft
- Rotates and manoeuvre IOLs as well as cataract nucleus
- Round handle, length 122mm



6-418-2


**Daya Textured Manipulator**

- 0.2mm diameter tip
- Lightly textured tip
- Angled shaft, tip to angle length 11mm
- Round handle, length 119mm



6-418-3

▶ Video Available



### Ogawa 23 Gauge Lens IOL Manipulator




- 0.3mm diameter tip
- Fits through 23 gauge pars plana vitrectomy cannulas
- Straight shaft
- Round handle, length 122mm

Specially designed to assist in retrieving IOL implants dislocated into the posterior segment of the eye. Ball shaped tip can be used to manipulate haptics and / or optics, even when covered with residual lens capsule.

6-450



### Lester IOL Manipulator



- 0.4mm rounded tip / rotator
- Shaft to rotator length 0.8mm
- Push, pull style
- Angled shaft, tip to angle length 9mm
- Round handle, length 118mm

6-460



### Hirschman IOL Rotator




- 0.4mm rounded tip
- Angled shaft, tip to angle length 12mm
- Round handle, length 120mm

6-462-2




### Janjani Angled Manipulator



- 0.8mm diameter, rounded tip
- Angled shaft, tip to angle length 10mm
- Round handle, length 118mm

6-464

▶ Video Available




### Ota Shaped Hook for the IOL Intrascleral Fixation Technique



- Reverse hook, 0.25mm diameter, length 1.5mm
- Angled shaft, tip to angle length 10mm
- Round handle, length 118mm

Used in conjunction with Ota Y Marker (9-845) and Ota Reference Marker (9-846) for IOL Intrascleral Fixation Technique. The U-shape hook is used in conjunction with vitreoretinal forceps to extract the haptic through the Y shape incision.

6-464-1



### Ota Fine Shaped Hook for the IOL Intrascleral Fixation Technique



- Reverse hook, 0.20mm diameter, length 1mm
- Angled shaft 45°, tip to angle length 10mm
- Round handle, length 119mm

6-466


**Mackool Capsule Retractor and IOL Guide**

- 0.25mm tip
- 45° angled shaft, tip to angle length 12mm
- Round handle, length 120mm



Used in minimising capsular stress during insertion of trailing IOL haptic, especially when capsulorhexis is not intact or zonular laxity is present. Open hook proximal to tip gently retracts anterior capsule. Distal concave end is used as a guide while trailing haptic is maintained when dialling in IOL. In this manner, there is no direct contact of haptic against capsular edge, thus avoiding unwanted stress to capsule and / or zonule.


6-467

**DK IOL Manipulator / Rotator**

- 0.25mm inside diameter, 0.66mm outside diameter, forked tip
- Angled shaft, tip to angle length 9mm
- Round handle, length 117mm




6-469

**DK Double Ended Spatula / IOL Manipulator / Rotator****IOL Manipulator / Rotator**

- 0.67mm forked tip
- 45° angled shaft, tip to angle length 9mm
- Round handle, length 125mm

**Spatula**

- 0.55mm spatula
- 45° angled shaft, tip to angle length 11.5mm




6-469-1

**DK Double Ended Spatula / IOL Manipulator / Rotator****IOL Manipulator / Rotator**

- 0.67mm delicate forked tip
- 45° angled shaft, tip to angle length 9mm
- Round handle, length 125mm

**Spatula**

- 0.55mm spatula
- 45° angled shaft, tip to angle length 11.5mm



6-470

**Bechert Nucleus Rotator**

- 0.78mm tip, tip vertically oriented
- Angled shaft, tip to angle length 10mm
- Round handle, length 118mm



6-472

**Barrett Nucleus Rotator / Manipulator**



- 0.65mm mushroom style tip
- Angled shaft, tip to angle length 10mm
- Barrett balanced set handle, length 119mm



Multipurpose, eliminates need for multiple hooks and second instruments. Used as a second instrument to facilitate rotation and manipulation of nucleus as cracking. Mushroom style tip minimises chance of inadvertent damage to capsule while manipulating nuclear quadrants. Used to rotate and dial IOL implant within capsular bag. In presence of a small capsulorhexis, two manipulators are used in a two-handed manoeuvre allowing retraction of capsule or pupil with one manipulator and rotation and dialling with a second manipulator. Manipulator is well suited to retracting iris in an atraumatic fashion, and two manipulators can stretch a small pupil prior to phacoemulsification.

6-472-1

**Nucleus Rotator / Manipulator**



- 0.65mm mushroom style tip
- Angled shaft, tip to angle length 10mm
- Round handle, length 119mm




6-472-4

**Brown Intracapsular Manipulator**



- Flattened ball shaped tip
- 0.25mm wide tip
- 70° angled tip
- Round handle, length 119mm




Curved tip allows the manipulator to go over the top of steeply domed cataracts and especially mature cataracts where there the capsule is under stress. The curve stops the shaft of the manipulator putting downward pressure on the centre of the cataract.

6-476

**Mackool Nucleus Rotator / Elevator**



- 0.78mm tip
- 45° angled shaft, tip to angle length 12mm
- Round handle, length 120mm




Forked tip provides superb purchase on nucleus for rotation or elevation of nuclear sections.

6-479

**Deitz ICL Slider / Tucker**



- 0.78mm forked tip
- Lightly textured surface underside from tip to angle
- 45° angled straight shaft, tip to angle length 11mm
- Round handle, length 119mm



Textured manipulator to slip ICL under iris.

6-481


**Pallikaris ICL Manipulator**



- Textured finish
- 45° angled shaft, tip to angle length 12mm
- Round handle, length 119mm



6-482

**Bylsma ICL Manipulator**

- 0.6mm x 1.1mm oval shaped tips
- 45° angled curved shafts (curved left to right), tip to angle length 12.5mm
- Round handle, length 143mm

Designed to maximise protection of crystalline lens during ICL insertion. Curved, vaulted arms allow placement of ICL footplates through a paracentesis or keratome incision. Textured paddle provides secure grip on footplates as they are positioned under iris. Left and right configuration allows minimal changing of instruments and promotes a rapid atraumatic and reproducible tucking of ICL into its final position in posterior chamber.



6-490-1

**DK Nucleus Rotator, designed for right side port**

- 0.2mm by 0.4mm tip
- 1.75mm tip length, curved to left
- Angled shaft, tip to angle length 10mm
- Round handle, length 119mm



6-491-2

**DK Nucleus Rotator, designed for left side port**

- 0.2mm by 0.3mm tip
- 1.75mm tip length, curved to right
- Angled shaft, tip to angle length 10mm
- Round handle, length 119mm




6-491-3

**DK Nucleus Rotator, designed for right side port**

- 0.2mm by 0.3mm tip
- 1.75mm tip length, curved to left
- Angled shaft, tip to angle length 10mm
- Round handle, length 119mm




6-494

**DK Nucleus Rotator**

- 0.65mm diameter tip
- 45° angled curved shaft, tip to angle length 12mm
- Round handle, length 120mm



6-495


**Brazier Nucleus Rotator**

- 0.75mm blunt tip
- Curved shaft, tip to curve length 23mm
- Round handle, length 118mm



6-496

Drysdale Rotator



- 0.5mm tip with 1.3mm paddle
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 118mm




6-496-1

Drysdale Rotator - Short



- 0.5mm tip with 1.4mm paddle
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 118mm



6-496-2

Drysdale Rotator




- 0.8mm x 2.4mm large paddle
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 118mm




Designed to be used to rotate and manipulate the nucleus.

6-500

Fenzl Hook




- 0.13mm dialler
- Angled shaft, tip to angle length 9mm
- Round handle, length 117mm



**KAMRA™ Inlay Manipulator**

6-820

KAMRA™ Inlay Manipulator



- Textured underside of tip
- 45° angled slightly curved shaft, tip to angle length 10mm
- Overall length 118mm



**Capsule Polishers**

6-510

Mackool Capsule Polisher




- 0.3mm diameter olive shaped textured tip
- 45° angled shaft, tip to angle length 11mm
- Round handle, length 119mm





## Curettes


6-641

DK Meyerhoefer Chalazion Curette, 1mm cup

- 1mm cup
- Straight shaft
- Round handle, length 125mm




6-641-1

DK Meyerhoefer Chalazion Curette, 1.5mm cup

- 1.5mm cup
- Straight shaft
- Round handle, length 125mm




6-641-2

DK Meyerhoefer Chalazion Curette, 2mm cup

- 2mm cup
- Straight shaft
- Round handle, length 125mm




6-641-3

DK Meyerhoefer Chalazion Curette, 2.5mm cup

- 2.5mm cup
- Straight shaft
- Round handle, length 125mm



6-641-4


DK Meyerhoefer Chalazion Curette, 3mm cup

- 3mm cup
- Straight shaft
- Round handle, length 126mm



## Depressors

6-615


Tsukahara Scleral Depressor

- Highly polished tip
- Tip length 6mm, maximum diameter 1.2mm
- 55° angled shaft
- Large diameter round handle, length 114mm




6-615-1

▶ Video Available



### Tsukahara Scleral Depressor with Slotted Sides

- Textured tip
- 55° angled shaft
- 3 slots on the right and left of the tip (6 slots overall)
- Tip length 6mm, maximum diameter 1.2mm
- Large diameter round handle, length 114mm




6-615-2

▶ Video Available



### Kurakazu Scleral Depressor 4/6mm

- Polished tip
- Tip length 10mm, diameter 0.8mm
- Tip angled twice at 4mm and 6mm
- Large diameter round handle, length 115mm



6-635-2

### DK Schocket Double Ended Scleral Depressor


- 2.5mm round and 4.5mm cylinder tips
- Round handle, length 135mm



6-635-3

### Koura Double Ended Scleral Depressor

- 2mm round and 2mm cylinder tips
- 2x slits down side, 0.5mm diameter x 6mm length
- Round handle, length 124mm



The slits down the side of the tip aid the gripping of the sclera when depressed.

6-635-4

### Nishimura Depressor and Manipulator

- 0.5mm diameter pin 3mm long
- Shaft with pin angled at 40°
- 3mm round highly polished depressor
- Round handle, length 128mm



Used for 23 gauge and 25 gauge vitreoretinal surgery to enable the surgeon to cut and remove vitreous body surrounding the instrument cannulas. The pin is inserted into the cannula enabling the surgeon to manipulate the cannula to give better access to treat the vitreous body surrounding the cannula.

## Dissectors

6-604

Daya Lamellar Spear

- 1.3mm width curved blade
- 0.15mm thickness at tip
- 35° angled curved shaft
- Tip to angle length 10.5mm
- Round handle, length 130mm

- 1.8mm width curved blade
- 0.15mm thickness at tip, 1mm at base of shaft
- 35° angled curved shaft, tip to angle length 12mm



6-607

Morlet Lamellar Knife / Dissector

- 0.35mm x 2mm curved
- Angled shafts 12mm tip to curve


- 0.1mm x 1.5mm with sharp edges
- Tip to angle length 3mm
- Round handle, length 111mm



Combined Paufrage knife and lamellar corneal dissector. Paufrage knife used for starting lamellar corneal dissection and also to extend while peeling back superficial corneal tissue. Also used for undermining the periphery of host lamellar corneal bed, which helps to prevent development of a step at the anterior host donor junction when implanting a donor lamellar that is thicker than excised host lamellar. Paufrage knife also used for removing lamellar host tissue down to level of Descemet's membrane. Lamellar corneal dissector is used to create a lamellar corneal plane via a peripheral corneal pocket, or to widely extend a lamellar dissection that has been started with Paufrage knife. Designed to separate lamellae and to stay within a plane. Corneal lamellae can be rapidly separated with this instrument without the need for lifting and turning back lamellar flap. After separating the layers, lamellar corneal button may be excised with scissors.

## Scleral Support Rings

6-600




- Three bands supplied as one of each (small, medium, large)
- Small (12mm inside diameter, 15mm outside diameter)
- Medium (13mm inside diameter, 15.5mm outside diameter)
- Large (14mm inside diameter, 16.5mm outside diameter)

## Fixation Hook

6-645

DK Double Fixation Hook

- Sharp tips, 2 point fixation, 2mm separated
- Round handle, length 128mm



## Muscle

6-620

### DK Paediatric Muscle Hook



- 0.65mm diameter tip, tip to curve length 4.5mm
- Round handle, length 125mm

Used in inferior oblique surgery.

6-625

### Jameson Muscle Hook



- 2mm bulbous tip, tip to curve length 8mm
- Round handle, length 136mm

6-626

### Assaf Resection Muscle Hook



- 90° double 10mm adjustable tips, caliper measures 2mm - 14mm
- Flat handle, length 135mm

6-626-1

### Assaf Resection Muscle Hook (12mm adjustable tips)

6-626-2

### Assaf Resection Muscle Hook (14mm adjustable tips)



- 90° double 12mm (6-626-1) and 14mm (6-626-2) adjustable tips
- Caliper measures 2mm - 14mm
- Flat handle, length 135mm


The Assaf Resection Muscle Hooks incorporate a double-armed squint hook with an integrated caliper, thereby allowing controlled muscle resection. This design allows the surgeon to isolate and hook the extra-ocular muscle with one arm of the instrument. The integrated caliper can be set to define the amount of muscle which needs to be resected. The caliper range is from 2mm to 14mm. The muscle is supported with the other arm of the instrument, without causing undue stretching or tension. A suture can be passed along the groove in the second arm in either an interrupted or conventional fashion.

## Retractors

6-627

### Hanasaki Lid Retractor, 7mm

▶ Video Available




- Double hooks 7mm apart
- Single piece construction with strong closing pressure
- When at rest the retractors are 20mm apart

Used for retracting the skin and orbicularis muscle during ptosis surgery.

6-627-1

### Hanasaki Lid Retractor, 5mm



- Double hooks 5mm apart
- Single piece construction with strong closing pressure
- When at rest the retractors are 19mm apart


Used for retracting the skin and orbicularis muscle during ptosis surgery.

6-627-5

**Adjustable Hanasaki Lid Retractor, 5mm**



- Double hooks 5mm apart
- Blades offset by 1mm
- When at rest the retractors are 18mm apart
- Adjustable with thumb screw

6-628

**Desmarres Lid Retractor, size 0**

- Blade width 11mm
- Flat handle, length 132mm

6-629


**Rabkin Lid Retractor**

- Blade width 15.5mm
- Flat handle, length 134mm
- Non-reflective finish, textured surface top face

Lower lid retractor designed to function as a broad backstop in carbon dioxide laser transconjunctival blepharoplasty.

**Lens Loop and Nucleus Expressor**

6-610

**Barrett Modified Lens Loop**

- 4mm x 12mm loop (outside dimension)
- 3mm x 9mm loop (inside dimension)
- Barrett balanced set handle, length 121mm
- Distinctive identification labelling

Smaller diameter allows use in phacoemulsification through a relatively small wound. Lens loop also used to apply pressure superiorly in conjunction with pressure applied inferiorly by Barrett nucleus expressor (6-630) during manual extra-capsular cataract extraction (ECCE) surgery.


6-630

**Barrett Nucleus Expressor**

- 2mm bulbous tip, curved shaft
- Barrett balanced set handle, length 120mm
- Distinctive identification labelling

# Lacrimal Probes and Dilators

6-180



## Lacrimal Dilator

- 0.1mm diameter pointed tip
- 10° inclusive angle
- Round handle, length 122mm



6-180-1




## Lacrimal Dilator

- 0.2mm diameter rounded tip
- 10° inclusive angle
- Round handle, length 122mm



6-181




## Lacrimal Dilator

- 0.45mm diameter blunt tip
- Round handle, length 120mm



6-182-2




## Otaka Dilator

- Bullet shape tip to ease insertion
- Double ended instrument
- Marks at diameters 0.5, 0.6 and 0.7mm
- Round handle, length 103mm

- Marks at diameters 0.8, 0.9, 1.0, 1.1 and 1.2mm

The 6-182-2 Otaka Dilator is used to dilate the lacrimal punctum. Marks on the tips signify specific sizes as the dilator is inserted.



6-656



## DK Lacrimal Probe

- High quality surface finish over first 5mm of tips
- Overall length 130mm
- Tip sizes: 0000 and 000

6-656-1 • Tip sizes: 00 and 0

6-656-2 • Tip sizes: 1 and 2

6-656-3 • Tip sizes: 3 and 4

6-656-4 • Tip sizes: 5 and 6

6-656-5 • Tip sizes: 7 and 8




# Lid Plates

6-664

## Otaka Lid Plate

- 23mm wide
- 20mm wide
- Length 55mm



6-665

**Rabkin Laser Blepharoplasty Plate**

- 20mm wide
- 23mm wide
- Highly polished
- Partial matte finish
- Length 111mm
- Non-reflective finish


For use in carbon dioxide laser upper lid and transconjunctival blepharoplasty as well as to retract eyelashes in laser resurfacing of skin.

**Eye Shields**

6-667

**Rabkin Eye Shield**

- 20.5mm wide x 22mm long
- Highly polished
- Supplied individually

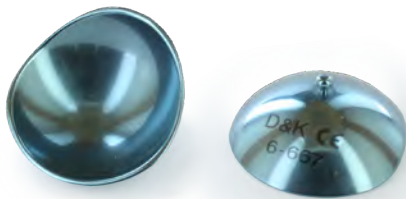

Eye Shield with centrally mounted stem to facilitate placement and removal. Protects the eye when carrying out laser blepharoplasty surgery.

6-667-2

**Egi-Rabkin Large Eye Shield**

- 19mm wide x 22mm long
- Highly polished
- Supplied individually



Protects the eye when carrying out laser blepharoplasty surgery.

6-667-3

**Egi-Rabkin Medium Eye Shield**

▶ Video Available

- 18.5mm wide x 21mm long
- Highly polished
- Supplied individually



Protects the eye when carrying out laser blepharoplasty surgery.

6-667-4

**Egi-Rabkin Small Eye Shield**

- 18mm wide x 20mm long
- Highly polished
- Supplied individually




Protects the eye when carrying out laser blepharoplasty surgery.

6-667-6

**Egi-Miyata Medium Eye Shield**

- 18.5mm wide x 21mm long
- Highly polished
- Supplied individually

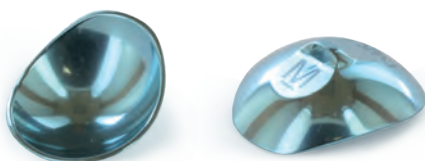

The eye shield has a loop handle rather than a peg. This reduces the height of the eye shield making it less intrusive during surgery. Protects the eye when carrying out laser blepharoplasty surgery.

6-667-7


**Miyata Eye Shields - 11mm**

6-667-8

**Miyata Eye Shields - 12mm**

▶ Video Available

- 11mm diameter (6-667-7)
- 12mm diameter (6-667-8)
- Outside matte finish
- Inside highly polished
- Supplied individually



6-667-7 and 6-667-8 sold separately and used in conjunction with the Miyata Laser Protection Forceps ref: 2-660

## Irrigating Eye Shields

6-670

### Irrigating Eye Shield with Luer Lock


- 19mm wide x 22mm long irrigating eye shield
- Irrigating port in centre of eye shield
- Eye shield highly polished
- Luer lock and silicone tubing supplied
- Supplied individually



6-670-1

### Irrigating Eye Shield

- 19mm wide x 22mm long irrigating eye shield
- Irrigating port in centre of eye shield
- Eye shield highly polished
- Supplied individually

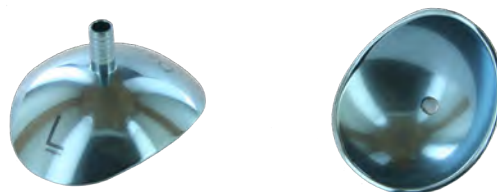

## Refractive

6-855

### DK Femto Flap Lifter and Re-treatment Spatula



#### Flap lifter

- 0.4mm diameter, smooth polished surface
- Curved shaft, 12mm length

#### Retreatment Spatula

- 0.15mm tip diameter, smooth polished surface
- Tip to angle length 3mm
- Round handle, length 123mm



6-855-1

### DK Femto Flap Lifter and Re-treatment Spatula, Bullet Shaped Tip



#### Flap lifter

- 0.4mm diameter, smooth polished surface
- Curved shaft, 12mm length

#### Retreatment Spatula

- 0.15mm tip diameter, smooth polished surface
- Bullet shaped tip
- Tip to angle length 3mm
- Round handle, length 123mm



Bullet shaped tip

6-856

### Femto Laser Spatula



- 0.5mm spatula
- Smooth slightly curved shaft with blunt tip
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 118mm



6-857

### Stevens Femto Rim Lifter




- Sharp bullet shaped tip, 0.5mm long
- 45° angled shaft, tip to angle length 10mm
- Round handle, length 119mm

The sharp tip of the Stevens Femto Rim Lifter is used after the femtosecond laser to sweep along the rim to delineate and open the flap.







6-858

**Stevens Femto Flap Lifter**

- Thin curved blade, 1.3mm wide with sharp edges
- 35° angled curved shaft, tip to angle length 10.5mm
- Round handle, length 122mm

6-859

**Stevens Femto Flap Lifter, narrow tip**

- Thin curved blade with narrow pointed tip, 1.3mm wide, sharp edges
- 35° angled curved shaft, tip to angle length 10.5mm
- Round handle, length 122mm

The curved design of the Stevens Femto Flap Lifter glides smoothly to raise the flap, whilst the sharp edges are used to separate the adhesions under the flap that are left after the femtosecond laser.

6-866

**DK Epithelial Separator / Lifter**

- 5mm triangular-shaped tip
- 45° angled shaft
- Round handle, length 115mm

6-870

**Buratto LASIK Oval Spatula**

- 1.3mm curved blade
- 35° angled curved shaft, tip to angle length 10.5mm
- Round handle, length 122mm

Designed to raise flap during LASIK.

6-870-1


**Buratto LASIK Oval Spatula**

- 1.3mm curved blade
- 60° angled curved shaft, tip to angle length 10.5mm
- Round handle, length 119mm

## DK Epithelial Trepine with Trepine Guide and Alcohol Chamber (order separately)

### DK Trepine Guide and Alcohol Chamber

- Alcohol chamber height 6mm
- Internal diameter 0.5mm larger than incision
- Round handle, length varies from 128mm to 131mm

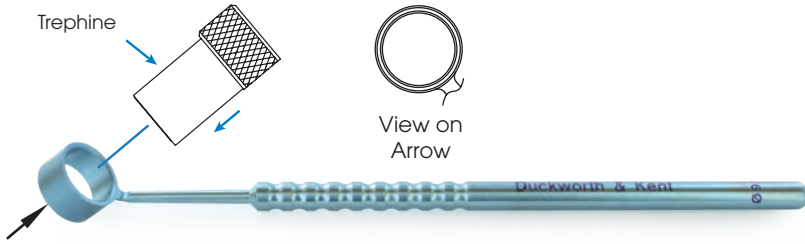

### DK Epithelial Trepine

- Trepine creates a 300° incision into the epithelium
- Flat on knurled depicts the hinge of the epithelium flap
- Trepine height 20mm




Diameter Incision	DK Epithelial Trepine Code	DK Trepine Guide & Alcohol Chamber Code
8mm	6-924	6-944
8.5mm	6-925	6-945
9mm	6-926	6-946
9.5mm		6-947
10mm	6-928	
10.5mm	6-929	
11mm	6-930	

## Bates Trepine Guide and Alcohol Chamber with Fixation (order separately)

### Bates Trepine Guide and Alcohol Chamber with Fixation

- Low profile alcohol chamber, height 4mm
- Designed as a guide for the DK Epithelial Trepine
- Internal diameter 0.5mm larger than incision
- Round handle, length varies from 126mm to 127mm

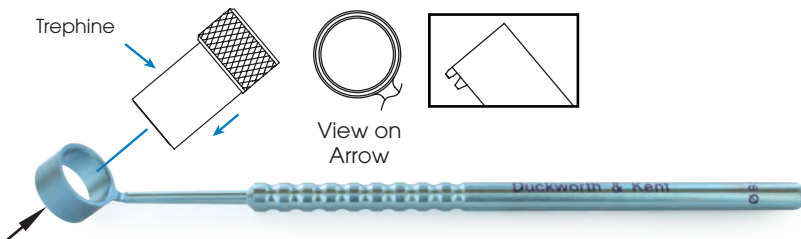

### DK Epithelial Trepine


- Trepine creates a 300° incision into the epithelium
- Flat on knurled depicts the hinge of the epithelium flap
- Trepine height 20mm



Diameter Incision	DK Epithelial Trepine Code	Bates Trepine Guide & Alcohol Chamber Code
8mm	6-924	6-944-1
8.5mm	6-925	6-945-1
9mm	6-926	

## Retinal

6-912

Giunchiglia Membrane Peeling Spatula, 23 Gauge

- Ultra fine textured tip
- 0.6mm wide, blunt tip curved 45°
- Straight 23 gauge shaft, length 32mm
- Round handle, overall length 128mm



6-912-1

Membrane Peeling Spatula, 23 Gauge

- Fine textured tip
- 0.6mm wide, blunt tip curved 45°
- Straight 23 gauge shaft, length 32mm
- Round handle, overall length 128mm






6-675

Protective Cleaning Cover For Interchangeable VR Instrument Heads

- Suitable for all Duckworth & Kent Vitreoretinal Instrument Heads
- Protects the Vitreoretinal detachable heads
- Standard luer fitting for flushing attachment



The Protective Cleaning Cover is used to protect the interchangeable Vitreoretinal Heads during cleaning and reprocessing cycles, and can be used instead of the plastic re-usable protective cover that is supplied with every VR Head. A luer flushing adaptor at the back of the cover enables 'back flush' cleaning and disinfection of the VR Head.

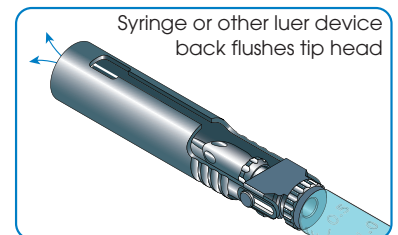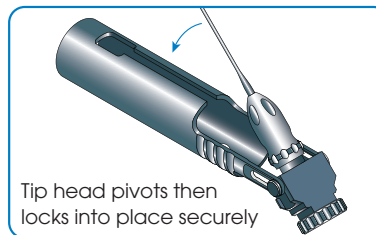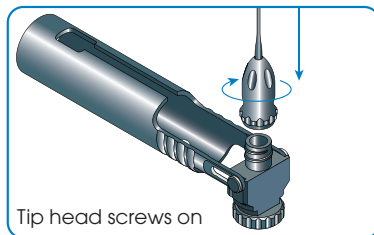




6-675-1

Small Flushing Adaptor for Interchangeable VR Instrument Heads

- Suitable for all Duckworth & Kent Vitreoretinal Instrument Heads
- Standard luer fitting



The small flushing adaptor is used in conjunction with the plastic re-usable protective cover that is supplied with every Vitreoretinal Head and enables 'back flush' cleaning and disinfection of the VR Head.

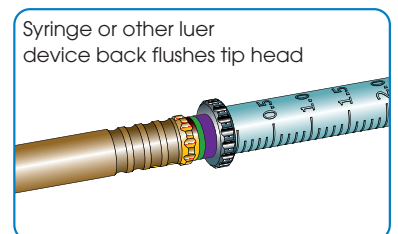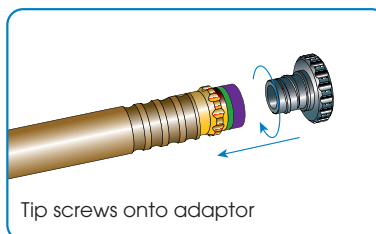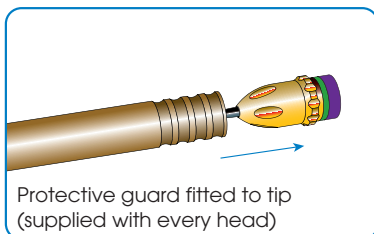

6-676

Squeeze Handle for Vitreoretinal Instrument Heads

- Overall Length 92mm (without head)
- Squeeze action handle
- Suitable for all Duckworth & Kent Vitreoretinal Instrument Heads



All Interchangeable Vitreoretinal (VR) Heads are sold separate from the handle. The VR Heads require a handle for operation. ONLY the DK Squeeze Handle for VR Instrument Heads, ref 6-676, is suitable. The VR Heads are screwed onto the thread of DK Squeeze Handle for VR Instrument Heads.

6-190

Cannula Inserter - 25 Gauge

- Designed to insert Naito Step Cannulas (8-640)
- Length 100mm



6-190-1

Cannula Inserter - 23 Gauge

- Designed to assist the insertion of the Instrument Cannulas
- Blunt tip
- Round handle, length 100mm




**Disruptor for Corneal Collagen Crosslinking (CXL)**


6-960

Daya Disruptor for CXL

▶ Video Available




- 40 fine sharp points radially spaced
- 45° angled shaft
- Round handle, length 125mm




6-960-1

Epithelial Disruptor for CXL



- 40 fine sharp points radially spaced
- Round handle, length 21mm



Corneal Collagen Crosslinking with Riboflavin known as CXL, C3-R and CCL. The procedure involves instilling Riboflavin (one of the B vitamins) into the eye in a specific preparation. Both the Daya Disruptor for CXL (ref 6-960) and Epithelial Disruptor (ref 6-960-1) are used to create tiny pores in the epithellum, through which the Riboflavin can permeate directly into the corneal stroma. Once adequately dosed, the eye is exposed to ultraviolet light radiation. The riboflavin causes new bonds to form across adjacent collagen strands in the stromal layer of the cornea, which recovers and preserves some of the cornea's mechanical strength. This process results in an increase in the rigidity of the cornea. The procedure is suitable for those who have conditions such as Keratoconus or other forms of corneal ectasia.

**Keratometers**

6-700

Maloney Keratometer

Cone-shaped instrument designed to reflect the microscope light in concentric rings on the cornea to detect astigmatism.



**Clamps**

6-800

Barrett LeClip Utility Clamp

- 14mm serrated cross action jaws
- Length 82mm
- Distinctive identification labelling

Replaces need for a mosquito or artery forceps. Holds sutures to drape without piercing plastic.



6-805

Bulldog Clip

- 8.5mm serrated cross action jaws
- Length 46mm




## ReLex® SMILE

6-835

SMILE Double Ended Dissector

- 0.4 diameter bullet shaped tip
- 60° angled curved shaft, tip to angle length 9.5mm
- Laser markings on angled shaft at 7, 7.5 and 8mm

- 0.25 diameter bullet shaped tip
- 60° angled shaft, tip to angle length 2mm
- Round handle, length 117mm




6-836

SMILE Double Ended Dissector with spoon tip

- 0.35 diameter, 1.25mm wide spoon-shaped tip
- 70° angled curved shaft, tip to angle length 9.5mm
- Laser markings on angled shaft at 7, 7.5 and 8mm

- 0.25 diameter bullet shaped tip
- 60° angled shaft, tip to angle length 2mm
- Round handle, length 116mm



6-836-1

SMILE Double Ended Dissector with Taneri spoon tip

Semi-sharp spoon-shaped tip facilitates lenticule dissection in every direction, including reverse movements.



- 1.25 x 0.3mm semi-sharp spoon-shaped tip
- 60° angled straight shaft, tip to angle length 8.5mm
- Laser markings on angled shaft at 7, 7.5 and 8mm

- 0.25 diameter bullet shaped tip
- 60° angled shaft, tip to angle length 2mm
- Round handle, length 116mm



6-836-2

Reinstein Lenticule Separator


Enables a surgical technique for SMILE to be performed with one instrument, entering the eye only once through one incision, using only one sweep per plane, and taking about 30 seconds to separate and withdraw the lenticule.

 Video Available



- 1.25 x 2.0mm smooth spoon-shaped tip
- 90° curved shaft, tip to angle length 8.5mm
- 0.22 diameter bullet shaped tip

- 60° angled shaft, tip to angle length 2mm
- Round handle, length 114mm



6-837

SMILE Lenticule Hook

- 1mm wide 3 pronged hook tip up and tip down
- 70° angled shaft, tip to angle length 10mm
- Round handle, length 123mm



6-839

SMILE Short Dissector

 Video Available



- 0.25 diameter bullet shaped tip
- 60° angled shaft, tip to angle length 2mm
- Round handle, overall length 112mm



# REUSABLE TITANIUM INSTRUMENTS



MANUFACTURED IN ENGLAND


# Punches and Inserters

Glaucoma Punches  
Inserters


7

## Glaucoma Punches

7-101




### Khaw Small Descemet's Membrane Punch - 0.5mm x 0.3mm




- Designed to punch 0.5mm x 0.3mm
- Particularly suited when small sclerostomy required
- Punch action can be repeated to create larger sclerostomy
- Can be used with a short scleral tunnel incision
- Squeeze action handle activates shaft to punch
- Round squeeze handle, length 117mm

7-102




### Khaw Descemet's Membrane Punch - 0.75mm x 0.5mm



- Designed to punch 0.75mm x 0.5mm
- Can be used with a short scleral tunnel incision
- Squeeze action handle activates shaft to punch
- Round squeeze handle, length 117mm

7-105




### DK Descemet's Membrane Punch - 1.2mm x 0.7mm



- Designed to punch 1.2mm x 0.7mm
- Squeeze action handle activates shaft to punch
- Round squeeze handle, length 117mm

## Inserters

7-810



### Capsule Tension Ring Delivery System



- 7-810 Capsular Tension Ring Delivery System is to be used for implantation of Morcher capsular tension ring
- Injector to insert the capsular tension ring
- Bayonet fitting allows easy separation of main body and centre rod
- Overall length 140mm

7-811

### Capsule Tension Ring Inserter (Ophtec CTR)

7-811 & 7-812 - **Not for sale in the United States of America**

7-812

### Capsule Tension Ring Inserter (Bio Vision CTR)




- Bayonet fitting allows easy separation of main body and centre rod
- 7-811 - Injector is to be used for implantation of Ophtec capsule tension rings, Model 275 and Model 276.
- 7-812 - Injector is to be used for implantation of Bio Vision capsule tension rings, Models CTR-11W, CTR-11B / CTR-12W, CTR-12B and CTR-13W, CTR-13B
- Overall length 150mm




7-818

▶ Video Available



### Sugiura Ciliary Sulcus Pad Injector

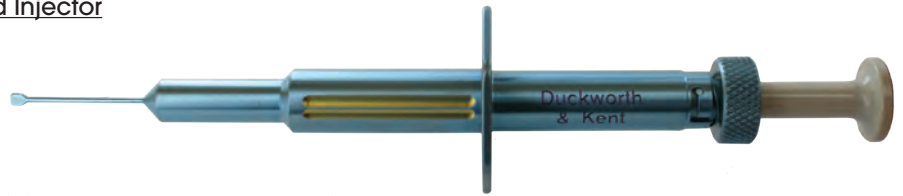

- Designed for suture fixation of IOL implants to sclera through a 2.6mm incision
- Injector is to be used to position and expel the MANI 1486L needle
- Bayonet fitting allows easy separation of main body and centre rod
- Overall length 129mm

In 1999 Dr Sugiura introduced a new technique to help make suturing haptics of intraocular lens into the ciliary sulcus safer and more exact using the 'Ciliary Sulcus Pad'. The original design used a silicone sponge pad that matched the shape of the ciliary sulcus. With the pad positioned at the ciliary sulcus, a needle pushed through the pad would repeatedly and accurately pierce the ciliary sulcus in the correct position.

The Sugiura Ciliary Sulcus Pad Injector (7-818) simplifies the procedure and uses a material that is safe and widely used in ophthalmology.

Since the width of the Ciliary Sulcus Pad is 2mm it can be inserted through a 2.6mm corneal incision. It is introduced into the eye from the opposite side of the location where the needle is inserted. It is moved under the iris and placed at the ciliary sulcus. By pushing the injector plunger the needle passes through the injector pad and the ciliary sulcus. The needle is then pushed out and the injector withdrawn.

# REUSABLE TITANIUM INSTRUMENTS



MANUFACTURED IN ENGLAND

# Irrigation and Aspiration

Phaco Wrenches

Scleral Pins

Cannulas

Infusion / Chamber Maintainers

Irrigation and Aspiration Cannulas

Irrigation and Aspiration Handpieces

Retinal Cannulas

Irrigation and Aspiration


8

## Phaco Wrenches

8-001

### DK Phaco Wrench

- For use with Alcon fitting needles and all Duckworth & Kent aspirating tips (8-730 range)



## Scleral Pins

8-050

### DK Scleral Pin, 20 gauge

- 20 gauge (0.9mm diameter)
- Coloured blue
- Length 3.5mm




Used in conjunction with the DK Scleral Pin Holding Forceps (2-831).

## Cannulas

8-601

### Inamura Hyper-Hydrodissection Cannula, 22 Gauge




- 22 gauge tube (0.7mm diameter)
- 0.9mm x 0.3mm flattened tip
- Twin jets
- 45° angled tip
- Overall length 36mm



8-601-1

### Inamura Hydrodissection Cannula, 60° twin jet angle, 22 Gauge




- 22 gauge tube (0.7mm diameter)
- Twin jets, inclusive angle 60°
- 45° angled tip
- Overall length 36mm



8-601-2

▶ Video Available

### Inamura Multipurpose Cannula, 22 Gauge




- 22 gauge tube (0.7mm diameter)
- Twin jets, inclusive angle 30°
- 45° angled tip
- Overall length 36mm



The Inamura Multipurpose Cannula is used for: hydrodissection, nucleus rotation, iris reposition (floppy iris syndrome), aspiration of air bubbles, aspiration of liquefied cortex and cleaning the operative field.

8-601-3

### Inamura-Nezu Hydrodissection Cannula with Outer Sleeve




- 18 gauge tube, (1.25mm diameter)
- Twin jets, inclusive angle 30°
- Overall length 38mm



This cannula allows for a quick and more controlled hydrodissection, with a twin jet and outer sleeve which allows any returning fluid to be channelled through the outer sleeve and free flow out through any of the four rear ports. This reduces the chance of iris prolapse and lens subluxation in shallow chamber and small pupil eyes.

8-602

### Mackool® Hydrodissection Cannula, 23 Gauge



- 23 gauge tube (0.65mm diameter)
- 0.85mm x 0.3mm flattened tip
- 30° angled shaft, tip to angle length 8mm
- Overall length 35mm




Flat tipped cannula assists in producing a broad, flat stream of fluid for dissection. Safer because it does not require high injection pressure to achieve nucleus loosening.

8-603

### Capsule Polishing Cannula




- 23 gauge tube (0.65mm diameter)
- 1.75mm x 1mm olive shaped textured tip
- 30° curved shaft
- Overall length 34mm



Designed for polishing the anterior aspect of the posterior capsule.


8-604

DK LASIK Cannula, 23 Gauge

- 23 gauge tube (0.65mm diameter)
- 0.2mm diameter hole at tip
- Four 0.4mm diameter holes along side of shaft
- 25° angled shaft, tip to angle length 8mm
- Overall length 30mm



8-605

DK Air Injection Cannula, 23 Gauge

- 23 gauge tube (0.65mm diameter)
- 45° angled shaft, tip to angle length 5mm
- Overall length 35mm



8-720

DK Cannula Handle


- Specifically made for use with standard 6% Luer conical medical fitting
- Round 8mm diameter handle
- Length 99mm

**Infusion / Chamber Maintainers**

8-607-2

Yasuma Anterior Chamber Infusion Cannula

- Triangle tip shape
- Width = 5mm, length = 4.5mm and thickness 1.2mm
- Front irrigating port, 0.8mm diameter
- 19 gauge tube, 45° curved shaft
- Luer fitting




The Yasuma anterior chamber infusion cannula assists in the removal of soft lens material. The cannula tip is designed to seal a 2.5mm to 3mm incision whilst still providing infusion to the anterior chamber, enabling complete irrigation and aspiration of residual lens material with a stable anterior chamber. The cannula tip and shaft are made from one piece titanium with a high quality bore, giving consistent flow rates.

8-609

Luer Lock Fitting

- Luer fitting
- Fits to silicone tubing

8-609-1

Knurled Luer Lock Fitting


- Knurled luer fitting
- Fits to silicone tubing

8-609-2

Knurled Luer Lock Fitting

- Knurled luer fitting
- Fits to silicone tubing

8-615-1




### Rassam Infusion Cannula, 20 Gauge

- 20 gauge, thin wall, 0.9mm diameter x 4.2mm length
- Straight shaft, 45° bevelled tip
- 3 x 0.5mm pitched thread
- 5mm plate diameter
- Silicone tubing and luer fitting supplied



Self-retaining twist style mechanism secures cannula. 20 gauge thin wall fits standard sclerostomy incision. Stabilising plate prevents twisting and damaging of intraocular structures. Bevelled opening is marked by notch on plate for accurate positioning of bevel away from lens.

8-616




### Ogawa Infusion Cannula, 20 Gauge

- 20 gauge, thin wall, 0.9mm diameter x 4mm length
- Straight shaft, 45° bevelled tip
- Grooves in cannula body ensure non-traumatic securing of cannula
- Silicone tubing and luer fitting supplied



8-616-1




### Ogawa Infusion Cannula, 23 Gauge

- 23 gauge, thin wall, 0.7mm diameter x 4mm length
- Straight shaft, 45° bevelled tip
- Grooves in cannula body ensure non-traumatic securing of cannula
- Fits through 0.8 to 0.9mm paracentesis opening
- Silicone tubing and luer fitting supplied




## Irrigation / Aspiration Cannulas

8-635




### Ogawa I/A Cannula, 18 Gauge

- 18 gauge, thin wall, 0.8mm irrigation port, 0.3mm aspiration port
- 30° angled shaft, tip to angle length 7mm
- Coaxial irrigation and aspiration
- Irrigation through main hub and aspiration through side port
- Silicone tubing and luer fitting supplied

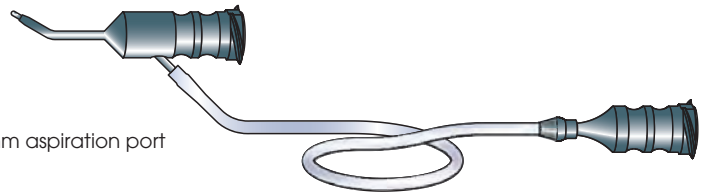


Round shaft seals paracentesis opening, even when cannula is rotated within paracentesis.

8-635-3



### Ogawa I/A Cannula, 18 Gauge

- 18 gauge, thin wall, 0.8mm irrigation port, 0.3mm aspiration port
- 30° angled shaft, tip to angle length 7mm
- Coaxial irrigation and aspiration
- Irrigation through main hub and aspiration through side port
- Silicone tubing and luer fitting supplied
- Knurled hub enhances grasp
- Textured tip

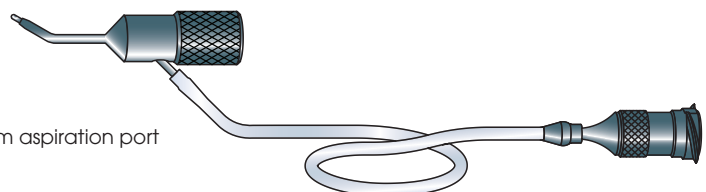

Textured tip allows for capsule polishing after removal of cortex. Round shaft seals paracentesis opening, even when cannula is rotated within paracentesis.


## Retinal Cannulas 23 Gauge

### 8-640-2

#### Step Instrument Cannula, 23 Gauge

- Cannula for 23 gauge instruments
- 45° bevelled tip, overall length 6mm
- Cannula plug 8-642-1, seals cannula when not in use
- Instrument Cannula is inserted into the sclera with the aid of the Cannula Inserter, ref: 6-190-1

Step prevents the accidental removal of the cannula.




### 8-640-6

#### Fibre Optic Cannula, 23 Gauge

- Cannula for 23 gauge chandelier / fibre optic probes
- Larger footplate stabilises position of fibre optic
- 45° bevelled tip, overall length 6mm
- Cannula Plug 8-642-1, seals Cannula
- Instrument Cannula is inserted into the sclera with the aid of the Cannula Inserter, ref: 6-190-1


Step prevents the accidental removal of the cannula.



### 8-640-7

#### Nishimura Fibre Optic Cannula, 23 Gauge


- Cannula for 23 gauge chandelier / fibre optic probes
- Larger footplate stabilises position of fibre optic
- 45° bevelled tip, overall length 6.5mm
- Cannula Plug 8-642-1, seals cannula
- Instrument Cannula is inserted into the sclera with the aid of the Cannula Inserter, ref: 6-190-1
- Has a unique screw thread fitting for the Nishimura Cannula (ref : 8-641-7)



### 8-640-9

#### 23 Gauge Instrument Cannula 20 Gauge Incision


- Cannula for 23 gauge instruments
- Seals 20 gauge incision. The instrument is used after inserting silicone oil through a 20 gauge port
- Overall length 5.6mm
- Cannula Plug, 8-642-1, seals cannula
- Instrument Cannula is inserted into the sclera with the aid of the Cannula Inserter, ref: 6-190-1



### 8-642-1

#### Cannula Plug, 23 Gauge

- Seals 23 gauge Instrument Cannula when not in use
- Overall length 7.7mm

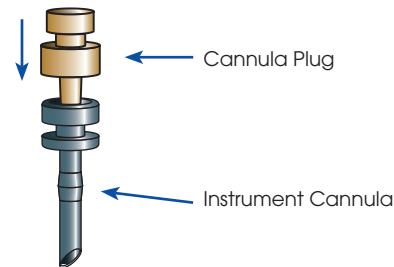


## Retinal Cannulas 25 Gauge

### 8-640

#### Step Instrument Cannula, 25 Gauge

- Cannula for 25 gauge Instruments
- 45° bevelled tip, overall length 6mm
- Cannula Plug, 8-642, seals cannula when not in use
- Instrument Cannula is inserted into the sclera with the aid of the Cannula Inserter, ref: 6-190

Step prevents the accidental removal of the cannula.




### 8-640-10

#### Step Instrument Cannula, 25 Gauge

- Cannula for 25 gauge Instruments
- Cannula head diameter enlarged to 2.5mm
- 45° bevelled tip, overall length 6mm
- Cannula plug 8-642 seals cannula



Step prevents the accidental removal of the cannula.



### 8-642

#### Cannula Plug, 25 Gauge

- Seals 25 gauge Instrument Cannula when not in use
- Overall length 6.6mm

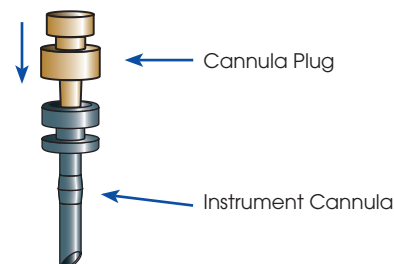

# Retinal Infusion Cannulas 23 and 25 Gauge

8-641

## Infusion Cannula , 25 Gauge



- 25 gauge tip only
- Infusion cannula is inserted into the eye through an instrument cannula
- Silicone tubing and luer fitting supplied

8-641-1


## Infusion Cannula Tip, 25 Gauge

- 25 gauge tip only
- Infusion cannula is inserted into the eye through an instrument cannula
- Supplied as cannula tip only
- Overall length 10.5mm



8-641-2

## Infusion Cannula , 23 Gauge



- 23 gauge tip only
- Infusion cannula is inserted into the eye through an instrument cannula
- Silicone tubing and luer fitting supplied

8-641-3

## Infusion Cannula Tip, 23 Gauge


- 23 gauge tip only
- Inserted into the eye through an instrument cannula
- Supplied as cannula tip only
- Overall length 10.5mm



8-641-4

## Infusion Cannula Tip, 23 Gauge


- 23 gauge tip only
- Inserted into the eye via an instrument cannula
- Supplied as cannula tip only
- Overall length 8.5mm



8-641-6

## Infusion Cannula Tip, 25 Gauge

- 25 gauge tip only
- Inserted into the eye through an instrument cannula
- Supplied as cannula tip only
- Overall length 8.5mm




8-641-7

## Nishimura Infusion Cannula, 23 Gauge

- 23 gauge tip only
- Infusion Cannula is screwed into the Nishimura Fibre Optic cannula
- Supplied as cannula tip only
- Overall length 8.5mm

The Nishimura Fibre Optic Cannula (ref: 8-640-7) has a unique screw thread fitting for use with the Nishimura Infusion Cannula.






8-641-8

**Infusion Cannula Tip, 23 Gauge**


- 23 gauge tip only
- 2 ports on the side of the tube
- Inserted into the eye via an instrument cannula
- Supplied as cannula tip only
- Overall length 11mm




8-641-9

**Infusion Cannula Tip, 23 Gauge**

- 23 gauge tip only
- 45° bevelled tip
- Inserted into the eye via an instrument cannula
- Supplied as cannula tip only
- Overall length 6.3mm



8-644



**Infusion Cannula, 23 Gauge**

- 23 gauge tip
- 45° bevelled tip
- Silicone tubing and luer fitting supplied



8-644-1

**Infusion Cannula Tip, 23 Gauge**

- 23 gauge tip
- 45° bevelled tip
- Overall length 9.5mm
- Supplied as cannula tip only




**Irrigation and Aspiration Handpieces 23 Gauge**

8-652

**DK Irrigation Handpiece, 23 Gauge**

8-652S


**Short Handle Irrigation Handpiece, 23 Gauge**



- 23 gauge, 0.65mm tube diameter
- Two 0.4mm side irrigation ports
- Curved shaft, tube length 15mm
- Round handle, length 107mm (8-652)
- Round handle, length 80mm (8-652S)



8-652S



8-652

8-652-1

**DK Irrigation Handpiece, 23 Gauge**

8-652-1S

**Short Handle Irrigation Handpiece, 23 Gauge**



- 23 gauge, 0.65mm tube diameter
- Open end 0.5mm irrigation port with a 30° angled face
- Curved shaft, tube length 11mm
- Round handle, length 102mm (8-652-1)
- Round handle, length 76mm (8-652-1S)



8-652-1S



8-652-1


▶ Video Available

8-657

**DK Aspiration Handpiece, 23 Gauge**

8-657S

**Short Handle Aspiration Handpiece, 23 Gauge**




- 23 gauge, 0.65mm tube diameter with textured tip
- 0.3mm aspiration port
- Curved shaft, tube length 11mm
- Round handle, length 103mm (8-657)
- Round handle, length 77mm (8-657S)

▶ Video Available



8-657S



8-657

**Short Handle Irrigation and Aspiration Handpieces**


“Improved dexterity & a significant reduction in weight”



**Irrigation and Aspiration Handpieces 21 Gauge**

8-650

**DK Irrigation Handpiece, 21 Gauge**




- 21 gauge, 0.8mm tube diameter
- Two 0.5mm irrigation ports
- Curved shaft, tube length 15mm
- Round handle, length 107mm



8-650-1


**Avolio Irrigation Handpiece, 21 Gauge**



- 21 gauge, 0.8mm tube diameter with flattened tip for first 5mm (0.6mm x 0.95mm)
- Two 0.5mm equivalent side irrigation ports
- Curved shaft, tube length 15mm
- Round handle, length 106mm




8-650-2

**Irrigation Handpiece, 21 Gauge**


- 21 gauge, 0.8mm tube diameter
- Bullet shaped tip
- Two 0.5mm irrigation ports
- Curved shaft, tube length 22mm
- Round handle, length 115mm



8-655

**DK Aspiration Handpiece, 21 Gauge**


- 21 gauge, 0.8mm tube diameter with textured tip
- 0.35mm aspiration port
- Curved shaft, tube length 15mm
- Round handle, length 107mm




8-655-1

**Avolio Aspiration Handpiece, 21 Gauge**

- 21 gauge, 0.8mm tube diameter with flattened textured tip for first 5mm (0.6mm x 0.95mm)
- 0.35mm aspiration port
- Curved shaft, tube length 15mm
- Round handle, length 106mm




8-655-2

**Aspiration Handpiece, 21 Gauge**

- 21 gauge, 0.8mm tube diameter with textured tip
- Bullet shaped tip
- 0.35mm aspiration port
- Curved shaft, tube length 22mm
- Round handle, length 115mm

**Femto Hydrodissection**


8-810

**Rossi Femto Hydrodissection Cannula**


- 0.7mm tube diameter
- One 0.3mm lower irrigation port
- Disc shaped tip
- Curved shaft, angle 45° to tip
- Round handle, length 107mm



8-700




## Barrett I/A Handpiece, 16 Gauge




- 16 gauge, 1.63mm tube diameter
- 2 x 0.8mm irrigation ports, 0.3mm aspiration port
- Curved shaft, tip to handle length 15mm
- Round handle, length 128mm

8-701




## DK I/A Handpiece (curved shaft), 16 Gauge




- 16 gauge, 1.63mm tube diameter
- 2 x 0.8mm irrigation ports, 0.3mm aspiration port
- Curved shaft, tip to handle length 15mm
- Round handle, length 129mm

8-702




## DK I/A Handpiece (straight shaft), 16 Gauge




- 16 gauge, 1.63mm tube diameter
- 2 x 0.8mm irrigation ports, 0.3mm aspiration port
- Straight shaft, tip to handle length 16mm
- Round handle, length 129mm

8-703




## DK I/A Handpiece (J-shaped tip), 16 Gauge




- 16 gauge, 1.63mm tube diameter
- 2 x 0.8mm irrigation ports, 0.3mm aspiration port
- J-shaped tip
- Straight shaft, tip to handle length 16mm
- Round handle, length 130mm

8-705

DK I/A Handpiece (45° angled tip), 16 Gauge

- 16 gauge, 1.63mm tube diameter
- 2x 0.8mm irrigation ports, 0.3mm aspiration port
- 45° angled tip
- Straight shaft, tip to handle length 16mm
- Round handle, length 130mm

8-706

DK I/A Handpiece (90° angled tip), 16 Gauge

- 16 gauge, 1.63mm tube diameter
- 2 x 0.8mm irrigation ports, 0.25mm aspiration port
- 90° angled tip
- Straight shaft, tip to handle length 16mm
- Round handle, length 130mm

8-711N

DK I/A Handpiece, Single Thread


8-711NL

I/A Handpiece with Irrigation Luer Lock

8-711N



- Round handle, length 115mm
- Luer lock fitting on irrigation port - 8-711NL
- Separates for cleaning internal parts
- Single thread at front of handpiece
- Silicone sleeve is pushed onto single thread
- Used with 8-730, 8-731 and 8-732 series DK I/A tips
- I/A tips purchased separately
- Silicone sleeve not included

Luer lock fitting  
8-711NL

8-711-1N

DK I/A Handpiece, Multi Thread

8-711-1NL

I/A Handpiece with Irrigation Luer Lock

8-711-1N



- Round handle, length 115mm
- Luer lock fitting on irrigation port - 8-711-1NL
- Separates for cleaning internal parts
- Multi-thread at front of handpiece
- Silicone sleeve is pushed onto multi-thread
- Used with 8-730, 8-731 and 8-732 series DK I/A tips
- I/A tips purchased separately
- Silicone sleeve not included

Luer lock fitting  
8-711-1NL

22 Gauge (0.7mm)		20 Gauge (0.9mm)	
0.25mm Aspiration		0.3mm Aspiration	
8-730, 90° angled	8-731, 90° angled	8-732, 90° angled	
8-730-1, 45° angled	8-731-1, 45° angled	8-732-1, 45° angled	
8-730-2, J-shaped	8-731-2, J-shaped		
	8-731-3, straight	8-732-3, straight	
	8-731-4, curved with half texture	8-732-4, curved with half texture	
		8-732-5, straight with half texture	
	8-731-6, straight with texture	8-732-6, straight with texture	
		8-732-7, 45° angled with texture	
		8-732-8, straight with texture 0.4mm aspiration port	



## REUSABLE TITANIUM INSTRUMENTS



MANUFACTURED IN ENGLAND




# Fixation Rings, Gauges, Markers and Specula

Calipers  
Fixation Rings  
Gauges  
Markers  
Specula

9

## Swivel Pivot Fixation Rings

9-510




### DK Fine-Thornton Fixation Ring, 13mm




- 3/4 ring, 13mm diameter ring with nine point fixation
- Pivot swivel flat handle, length 105mm

9-510R




### DK Fine-Thornton Fixation Ring, 13mm




- 3/4 ring, 13mm diameter ring with nine point fixation
- Pivot swivel round handle, length 112mm

9-515R




### DK Fine-Thornton Fixation Ring, 13mm



- 3/4 offset ring, 13mm diameter ring dual-sided with nine point fixation
- Pivot swivel round handle, length 114mm

9-503




### DK Fine-Thornton Fixation Ring, 16mm



- 3/4 ring, 16mm diameter ring with nine point fixation
- Pivot swivel flat handle, length 106mm

## Fixed Fixation Rings

9-509




### DK Fine Thornton-Fixation Ring, 13mm

- 3/4 ring, 13mm diameter ring with nine point fixation
- Fixed flat handle, length 114mm



9-526-2




### Fixation Ring

- 3/4 ring, 12mm diameter ring with 'snow-tyre pattern' fixation
- 11mm break in ring
- Round handle, length 96mm




## Fixation Rings and Gauges

9-513-1




### Fixation Plate

- Fixation Plate stabilises the eye when inserting the instrument cannula (ref: 8-640 range) or infusion cannula tip (ref:8-641range)
- 8.3mm diameter plate with 15 point fixation
- Slot allows easy removal of fixation plate
- Round handle, length 123mm



9-513-3



### Fine Fixation Ring with Caliper

- Low profile 3/4 ring, 5mm diameter with 5 point fixation
- Caliper end 3.5mm internal dimension
- Fixed flat handle, length 108mm



The location for placement of the instrument cannula (ref: 8-640 range) from the edge of the limbus is marked by the 3.5mm caliper on the end of the Fixation Ring with Caliper. The fixation ring end is used to fixate and stabilise the eye whilst the needle is used to make the initial incision.

## Capsulorhexis Gauges


9-518-1R

9-518-2R



Round Handle Fujimoto CCC Guide - Ø5.3mm

Round Handle Fujimoto CCC Guide - Ø5.6mm



- 12mm diameter outer ring
- Inner capsulorhexis guide 5.3mm and 5.6mm diameter ring
- Smooth surface to mark cornea
- Fixed round handle, length 100mm


9-518-1

9-518-2




Fujimoto CCC Guide - Ø5.3mm

Fujimoto CCC Guide - Ø5.6mm




- 12mm diameter outer ring
- Inner capsulorhexis guide 5.3mm and 5.6mm diameter ring
- Smooth surface to mark cornea
- Fixed flat handle, length 100mm

9-518-3



Ota -Fujimoto 5.6mm CCC Marker with Centre Pointer




- 5.6mm diameter ring, low profile with centre pointer
- Round handle, length 94mm

9-518-4



Donoso Capsulorhexis Marker for Multifocal Intraocular Lens Implants





- Designed to assist in creating a well centred and sized 5.5mm capsulorhexis for multifocal lenses
- Use the centre hole for locating the device on the visual axis of the eye
- The surgeon uses their same eye as the patient's eye for locating the device centre hole on the microscope light reflex
- Castellated ring at the tip which marks five segments of a 6.5mm diameter on the cornea, approximating to a 5.5mm diameter capsulorhexis
- The capsulorhexis should be guided just inside the five marks on the cornea
- Tip head angle 50°
- Round handle, length 125mm

## Injection Guide

9-544  
9-544-1

### Doi-Uematsu Intravitreal Injection Guide - Right Handed

### Doi-Uematsu Intravitreal Injection Guide - Left Handed





• PAT.P 2005.316218

- 0.5mm needle guide hole, suitable for 27 gauge needle or smaller
- 12mm diameter ring with 'snow-tyre pattern' fixation
- Held in the non-dominant hand
- Suitable for right handed surgeon ref: 9-544 / 9-544-2
- Suitable for left handed surgeon ref: 9-544-1 / 9-544-3
- Round handle, length 102mm ref: 9-544 & 9-544-1
- Round handle, length 98mm ref: 9-544-2 & 9-544-3

9-544-2  
9-544-3



### Doi-Uematsu Intravitreal Injection Guide - Right Handed

### Doi-Uematsu Intravitreal Injection Guide - Left Handed



9-544-4


### Doi-Uematsu Intravitreal Injection Guide - Right Handed - 30 Gauge



- 0.4mm needle guide hole, suitable for 30 gauge needle or smaller
- 12mm diameter ring with 'snow-tyre pattern' fixation
- 8.4mm break in ring
- Suitable for right handed surgeon
- Held in the non-dominant hand (left)
- Round handle, length 98mm


▶ Video Available

The Intravitreal Injection Guide facilitates the intravitreal injection procedure, stabilising the eye and needle, whilst accurately positioning the needle to inject drugs into the vitreous cavity. The unique 'snow-tyre pattern', rather than sharp points for fixation, gives firmer more positive control of globe with less discomfort to the patient. The injection needle can be directed accurately without damage to the lens or the retina and eliminates measurement of the distance to pars plana. The break in the fixation ring enables an anterior chamber tap, if required, in order to avoid intraocular pressure spikes.

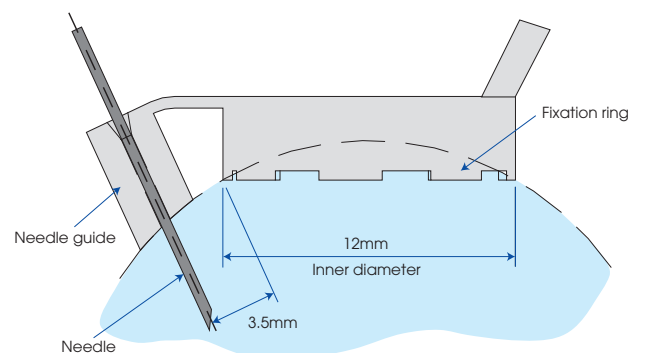

Side view on the eye with a needle passing through the guide

9-649




DK Castroviejo Style Marking Caliper

- 0.25mm x 0.25mm delicate marking tips
- Marks 0mm to 20mm in 0.25mm increments
- Marks from centre of tips
- Adjustable thumb screw
- Standard caliper handle



9-650




DK Castroviejo Style Marking Caliper

- 0.25mm x 0.25mm delicate marking tips
- Marks 0mm to 15mm in 0.25mm increments
- Marks from centre of tips
- Adjustable thumb screw
- Standard caliper handle



9-692


9-692-1



Double Ended Caliper, Marks 3.5mm and 4mm

Double Ended Caliper, Marks 3.5mm and 4.1mm

- Double ended caliper marks 3.5mm and 4mm (9-692)
- Double ended caliper marks 3.5mm and 4.1mm (9-692-1)
- Marks from centre of caliper tips
- Round handle, length 99mm



## Incision Gauges

### 9-687

#### DK Incision Gauge Set

- Set of 7 individual incision gauges, from 1mm to 3mm in 0.1mm increments
- Each individual gauges 3 sizes of 0.1mm increments
- Gauges specifically coloured for easy identification
- Gauges can be ordered individually



### 9-687-1

#### DK Incision Gauge 1.0, 1.1 and 1.2mm


- Gauges 3 sizes of 0.1mm increments
- 1.0, 1.1 and 1.2mm
- Gauge specifically coloured for easy identification
- Colour: pink



### 9-687-2

#### DK Incision Gauge 1.3, 1.4 and 1.5mm

- Gauges 3 sizes of 0.1mm increments
- 1.3, 1.4 and 1.5mm
- Gauge specifically coloured for easy identification
- Colour: dark blue



### 9-687-3

#### DK Incision Gauge 1.6, 1.7 and 1.8mm


- Gauges 3 sizes of 0.1mm increments
- 1.6, 1.7 and 1.8mm
- Gauge specifically coloured for easy identification
- Colour: light green



### 9-687-4

#### DK Incision Gauge 1.9, 2.0 and 2.1mm


- Gauges 3 sizes of 0.1mm increments
- 1.9, 2.0 and 2.1mm
- Gauge specifically coloured for easy identification
- Colour: blue



### 9-687-5

#### DK Incision Gauge 2.2, 2.3 and 2.4mm

- Gauges 3 sizes of 0.1mm increments
- 2.2, 2.3 and 2.4mm
- Gauge specifically coloured for easy identification
- Colour: gold



9-687-6

DK Incision Gauge 2.5, 2.6 and 2.7mm


- Gauges 3 sizes of 0.1mm increments
- 2.5, 2.6 and 2.7mm
- Gauge specifically coloured for easy identification
- Colour: purple



9-687-7

DK Incision Gauge 2.8, 2.9 and 3.0mm


- Gauges 3 sizes of 0.1mm increments
- 2.8, 2.9 and 3.0mm
- Gauge specifically coloured for easy identification
- Colour: copper



**Mendez Gauges**

9-700

DK Mendez Degree Gauge



- Marks 0° - 180° in 10° increments x 2
- 12mm internal ring diameter
- Flat handle, length 116mm




9-701R

Friedlander-Mendez Rotating Degree Gauge




- Marks 0° - 180° in 10° increments x 2
- 12mm internal ring diameter
- Round handle, length 104mm

Gauge rotates with index finger.




9-705R

Wallace Mendez Degree Gauge



- Measures 0° - 180° in 10° increments x 2
- 12mm internal ring diameter
- Round handle, length 102mm

Designed for surgeons familiar with use of a standard phoropter.






9-705R-1

▶ Video Available



**Mendez Degree Gauge**


- Marks 0° - 180° in 5° increments x 2
- 12mm internal ring diameter
- 14mm external diameter
- 60° angled handle
- Round handle, length 103mm



The Mendez Gauge used in conjunction with the 9-729-1 Axis Marker can create marks for the desired axis of Toric IOL implant alignment.

**LRI Gauges**

9-706




**Packard-Rosen LRI Degree Marker / Fixation, 12mm diameter**

- Marks 0° to 90° in 10° increments x 4
- 12mm internal ring diameter
- 12 point fixation
- Flat handle, length 117mm



9-706-1




**Packard-Rosen LRI Degree Marker / Fixation, 13mm diameter**

- Marks 0° to 90° in 10° increments x 4
- 13mm internal ring diameter
- 12 point fixation
- Flat handle, length 117mm



9-706-2



**Packard-Rosen LRI Degree Marker / Fixation, 14mm diameter**

- Marks 0° to 90° in 10° increments x 4
- 14mm internal ring diameter
- 12 point fixation
- Flat handle, length 118mm




## Radial Blade Markers

9-729



### DK Axis Marker, 2 blades

- 2 axial blades
- 4mm inside diameter, 11.6mm outside diameter
- Lowest profile with centre pointer
- Round handle, length 124mm



Use with 9-700 Mendez degree gauge.


9-729-1

▶ Video Available



### Axis Marker

- 2 axial blades
- 4mm inside diameter, 11.6mm outside diameter
- Lowest profile with centre pointer
- Round handle, length 95mm




The axis marker used in conjunction with the 9-705R-1 Mendez Degree Gauge can create marks for the desired axis of Toric IOL implant alignment.

9-730




### Thornton Lowest Profile Parallax Free Blade Radial Maker, 4 blades

- 4 radial blades
- 4mm inside diameter, 13mm outside diameter
- Lowest profile with centre pointer
- Round handle, length 128mm




9-732




### Thornton Lowest Profile Parallax Free Blade Radial Maker, 8 blades

- 8 radial blades
- 4mm inside diameter, 13mm outside diameter
- Lowest profile with centre pointer
- Round handle, length 128mm




9-733




### Thornton Lowest Profile Parallax Free Blade Radial Maker, 12 blades

- 12 radial blades
- 4mm inside diameter, 13mm outside diameter
- Lowest profile with centre pointer
- Round handle, length 128mm




9-734

**DK Lowest Profile Blade Radial Marker, 16 blades**

- 16 radial blades
- 5mm inside diameter, 13mm outside diameter
- Lowest profile with centre pointer
- Round handle, length 128mm

9-745


**Thornton 360° Parallax Free Arcuate Astigmatic Keratotomy**

- Lowest profile with centre pointer
- 6mm inside diameter, 8mm outside diameter
- Round handle, length 125mm

Improved visualisation, marks at every 10°. Two wings assist with marking axis of astigmatism.

## Viscocanalostomy Markers

9-749

**Kearney Parabolic Marker**

- 5mm x 5mm marker
- 1mm cross hatches
- Round handle, length 125mm

Marker assures consistent sizing, shaping and placement of superficial flap for Viscocanalostomy procedure. Cross hatches are 1mm away from corneal side of marker or 4mm away from apex. Marker is used to outline superficial flap of viscocanalostomy. After conjunctiva is retracted, sclera is examined for collector channels and marker is placed between two channels with cross hatch marks at limbus. Apply with pressure to globe for 15 seconds, remove and examine mark to ensure placement is positioned properly. If placement is not optimal, sclera refills with blood after another 30 seconds or so and marker can be re-applied to correct position. Upon removing marker, outline is followed with mini-diamond blade and sclera is cut down 200 to 250 microns. Marker assures consistent sizing, shaping and placement of superficial flap for viscocanalostomy procedure.

## DMEK Marker

9-830

**DMEK 'S' Marker**

- 1.25 x 2.5mm high 'S' mark
- 35° angled handle
- Round handle, length 96mm

The DMEK 'S' marker is designed to be used on the donor graft, through a 3mm diameter hole in the cornea created with a trephine. The 'S' is lightly marked on to the stromal side of descemet membrane (not the endothelial side). Once the graft is inside the anterior chamber, the 'S' verifies that it is the correct side up, before the graft is finally positioned.

## Ring Markers

9-778

### 5mm DK Ring Marker



- 5mm diameter ring, low profile
- Round handle, length 122mm




9-784

### 5.5mm DK Ring Marker



- 5.5mm diameter ring, low profile
- Round handle, length 123mm




9-779

### 6mm DK Ring Marker



- 6mm diameter ring, low profile
- Round handle, length 123mm



9-715W

### 6mm and 6.5mm Double Ended Ring Marker with Cross Wires



- 6mm and 6.5mm diameter rings
- Low profile with cross wires
- Double ended, markers on both ends for efficiency and economy
- Round handle, length 124mm




9-715-1

### 6mm and 8mm Double Ended Ring Marker



- 6mm and 8mm diameter rings
- Low profile
- Double ended, markers on both ends for efficiency and economy
- Round handle, length 124mm



9-716W

### 7mm and 8mm Double Ended Ring Marker with Cross Wires



- 7mm and 8mm diameter rings
- Low profile with cross wires
- Double ended, markers on both ends for efficiency and economy
- Round handle, length 126mm



9-780

**7mm DK Ring Marker**

- 7mm diameter ring
- Low profile
- Round handle, length 124mm



9-780W

**7mm DK Ring Marker with Cross Wires**


- 7mm diameter ring
- Low profile with cross wires
- Round handle, length 124mm



9-781

**8mm DK Ring Marker**


- 8mm diameter ring, low profile
- Round handle, length 124mm



9-781W

**8mm DK Ring Marker with Cross Wires**

- 8mm diameter ring
- Low profile with cross wires
- Round handle, length 125mm



9-716W-1

**8.5mm and 9mm Double Ended Ring Marker with Cross Wires**


- 8.5mm and 9mm diameter rings
- Low profile with cross wires
- Double ended, markers on both ends for efficiency and economy
- Round handle, length 128mm



9-788

**9mm DK Ring Marker**


- 9mm diameter ring, low profile
- Round handle, length 125mm



9-789W-1

**11mm Low Profile DK Ring Marker with Cross Wires**


- 11mm diameter ring
- Low profile with cross wires
- Round handle, length 126mm



## Toric Markers


9-840

▶ Video Available



### Cionni Toric Reference Marker

- 3 blades, radial marks
- 10mm inside diameter, 15mm outside diameter
- 70° angled shaft
- Round handle, length 124mm




9-840-1



### Cionni Toric Reference Marker for small eyes

- 3 blades, radial marks
- 8.5mm inside diameter, 12.75mm outside diameter
- 70° angled shaft
- Short round handle, length 98mm




The Cionni Toric Reference Marker for small eyes marks from 8.5mm diameter going out to 12.75mm diameter. The marker is used to mark the horizontal and vertical reference meridians pre-op with the patient in an upright position, as the eye typically rotates when the patient is supine. These meridians will be used to identify the desired meridians for the incision and IOL implant alignment.

9-840-2



### Barrett-Cionni Toric Reference Marker

- 3 blades, radial marks
- 8mm inside diameter, 15mm outside diameter
- 70° angled shaft
- Round handle, length 124mm




9-840-3



### Four Blade Toric Reference Marker


- 4 blades, radial marks
- 8.5mm inside diameter, 12.75mm outside diameter
- 70° angled shaft
- Short round handle, length 100mm



The Four Blade Toric Reference Marker marks from 8.5mm diameter going out to 12.75mm diameter. The marker is used to mark the horizontal and vertical reference meridians pre-op with the patient in an upright position, as the eye typically rotates when the patient is supine. These meridians will be used to identify the desired meridians for the incision and IOL implant alignment.

9-841

▶ Video Available



### Cionni Toric Axis Marker

- 2 rotating blades, radial marks
- 11mm inside diameter, 15mm outside diameter
- Marks 0° to 180° in 10° increments
- 40° angled shaft
- Flat handle, length 116mm



Marking the incisional and desired axis of IOL alignment can be accomplished using the Cionni Toric Axis Marker (ref:9-841). The line on the top portion of the marker is rotated to set the blades to the desired meridian for the incision or IOL implant axis. The two blades on the underside of the Axis Marker are then coated with a marking pen and the limbus dried with a sponge. The Axis Marker is then positioned over the eye, lining up the holes at the horizontal and vertical meridians with the previously made limbal reference marks. The Axis Marker is then lowered to touch the eye so that the blades make the desired marks on the limbus.

9-841-1



### Cionni Toric Axis Marker for small eyes

- 2 rotating blades, radial marks
- 9.35mm inside diameter, 12.75mm outside diameter
- Marks 0° to 180° in 5° increments
- External gauge diameter 16mm
- 40° angled shaft
- Flat handle, length 116mm



Benefits of Cionni Toric Axis Marker for small eyes, 9-841-1

- Single handed instrument
- Gauge diameter 16mm, suitable for small eyes
- 2 blades rotate within the degree gauge
- Easy to use, measurements every 5 degrees
- Marks at the limbus
- Recommended Reference Marker 9-840-1

9-841-2

**Barrett Toric Axis Marker**

- 2 fixed blades, orientated 90° to handle
- 11mm inside diameter, 15mm outside diameter
- Rotating dial marks 0° to 180° in 10° increments
- External gauge diameter 18mm
- 40° angled shaft
- Flat handle, length 116mm

Designed for surgeons familiar with placing a 2 blade axis markers inside a Mendez gauge. The 2 blades on the Barrett Toric Marker are fixed and the degree gauge scale rotates, so the surgeon relates the blade orientation to the handle.

First, the degree gauge is rotated, lining up the desired meridian for the IOL implant axis to the lines on the edge of the marker. The two blades on the underside of the Axis Marker are then coated with a marking pen and the limbus dried with a sponge. The Axis Marker is then positioned over the eye, rotating the handle to line up the lines at 0 degrees on the degree gauge with the horizontal meridians previously made by the reference marker. The Axis Marker is then lowered to touch the eye so that the blades make the desired marks on the limbus.

9-841-3


▶ Video Available

**R J Mackool™ Toric Axis Marker**

- 2 rotating blades, radial marks
- 9mm inside diameter, 12.8mm outside diameter
- Marks 0° to 180° in 10° increments
- 3 non-marking reference blades
- 45° angled shaft
- Flat handle, length 127mm
- US Patent No. 9,011,470

The R J Mackool™ Toric Axis Marker features an easy to operate pre-settable dial. This permits the technician, operating room nurse or surgeon to precisely set the instrument dial within seconds, as opposed to the cumbersome alternative of turning the instrument over to view the marking blades on the bottom of the instrument, while simultaneously attempting to grasp and align them with the gauge on the top of the instrument. A unique blade design retains dye, permitting the cornea to be marked with the lightest of touch and all blades extend 1mm from the diminutive dial where they are easily observed during the corneal marking. The rounded edges of the marking blades prevent abrasion to the cornea during the marking manoeuvre, whilst their extension well beyond the diminutive central portion of the marker permits the surgeon to see the blades as they are placed at the pre-selected meridian.

9-841-4

**Barrett Dual Axis Toric Marker**

- Two dials, one outer and one inner
- Two marking blades
- Marks 0° to 180° in 5° increments
- 45° angled shaft
- Round handle, length 125mm

The Barrett Dual Axis Toric Marker has been developed and designed to be used in conjunction with the toriCAM® app (available on a free download from the app Store on iTunes) to provide optimum axis alignment for the implantation of toric IOL implants.

The dual marker allows for compensation and marking of the 'true' horizontal, as determined by the toriCAM® app. The app provides an accurate reference for toric IOL implantation and orientation.


The marker has two dials, an outer to align with the reference axis provided by the app and an inner connected to the marking blades on the underside to mark the recommended toric axis provided by the Toric Calculator.

The outer dial is designed to compensate for any inaccuracies in the horizontal axis marks made on the eye. At each 90 degree point on the dial there are pointers on the outer edge which are aligned with the horizontal corneal limbal marks indicating the estimated horizontal axis.

The toriCAM® app, available from the app store on iTunes, enables the measurement of the angle of the horizontal axis marks made on the eye. The app will then determine and display the actual angle of the marked reference axis and the data will be saved and displayed on the phone with the patient's name and date. The outer dial is then set to this angle to compensate for any inaccuracy of the marks made on the eye.

The inner dial is set to the axis required for the correct alignment of the toric lens and the marker is then used to mark the cornea with the correct axis to implant and align a toric lens.

9-842-1

**Axis Marker, Full Ring**

- 2 blades, radial marks
- 10mm inside diameter, 16mm outside diameter
- 45° angled shaft
- Flat handle, length 112mm

# Toric Markers - comparison chart

Toric Axis Marker	Marks Created	Description	Recommended Marker
 9-729-1 9-705R-1		<b>Axis Marker, 9-729-1, and Mendez Gauge, 9-705R-1</b> - Suitable for restricted eyes, gauge diameter 14mm - Degree Gauge marks every 5 degrees - Marks on cornea	 9-840-1
 9-841		<b>Cionni Toric Axis Marker, 9-841</b> - Single Handed Instrument - Gauge diameter 18mm - 2 blades rotate within the degree gauge - Easy to use, marks every 10 degrees - Marks at the limbus	 9-840
 9-841-1		<b>Cionni Toric Axis Marker for small eyes, 9-841-1</b> - Single Handed Instrument - Gauge diameter 16mm, suitable for small eyes - 2 blades rotate within the degree gauge - Easy to use, marks every 5 degrees - Marks at the limbus	 9-840-1
 9-841-2		<b>Barrett Toric Axis Marker, 9-841-2</b> - Single Handed Instrument - Gauge diameter 18mm - Degree gauge scale rotates, blades are fixed to handle - For surgeons familiar with 2 blade axis marker & Mendez gauge - Easy to use, marks every 10 degrees - Marks at the limbus	 9-840-2
 9-841-3		<b>R J Mackool™ Toric Axis Marker, 9-841-3</b> - 2 rotating blades - 9.0mm inside diameter, 12.8mm outside diameter - Marks 0° to 180° in 10° increments - 3 non-marking reference blades - 45° angled shaft - Round handle, length 127mm	 9-840-1
 9-841-4		<b>Barrett Dual Axis Toric Marker, 9-841-4</b> - Two dials, one outer and one inner - Two marking blades - Marks 0° to 180° in 5° increments - 45° angled shaft - Round handle, length 125mm	 9-840-2

Barrett Dual Axis Toric Marker App  
 Available on the iPhone  
**App Store**

The marker has two dials, an outer to align with the reference axis provided by the **app** and an inner connected to the marking blades on the underside to mark the recommended toric axis provided by the Toric Calculator.



Visit our feature products page on the Duckworth & Kent website and view 360° interactive images for our Toric Marker range

[www.duckworth-and-kent.com/toric-markers](http://www.duckworth-and-kent.com/toric-markers)





## Ota IOL Fixation Markers

9-845

▶ Video Available



### Ota Y Marker for the IOL Intrascleral Fixation Technique

- 4.3mm x 2.8mm marker
- Double Y mark for universal placement
- Reference gauge offsets marker 2mm from limbus
- Round handle, length 96mm



(1) The Ota 'Y' Marker leaves the mark for a Y-shaped incision 2mm from the limbus. A 23 gauge MVR knife is used to perform a sclerotomy parallel to the iris.  
 (2) A 23 gauge MVR knife is used to form a scleral tunnel.  
 (3) After the tip of the haptic is inserted then a single 8-0 nylon suture is used on the scleral bed.  
 (4) The incision is sutured with 8-0 Vicryl.


9-845-2

▶ Video Available



### Ota T Marker

- 1.5mm x 2mm T shaped marker
- Reference arm offsets marker 2mm from limbus
- Round handle, length 96mm



Using this marker reduces the number of sutures needed as there is no scleral flap. A 24 gauge MVR knife is used to form the scleral tunnel. The incision is then sutured with 9-0 nylon.


9-846

▶ Video Available




### Ota Reference Marker for the IOL Intrascleral Fixation Technique

- 3 blades with centre point, radial marks
- 8mm inside diameter, 15mm outside diameter
- 70° angled shaft
- Round handle, length 97mm



9-847

▶ Video Available



### Ota L-Pocket Incision Marker

- Marks two squares 3mm x 3mm, side by side
- Round handle, length 94mm



Simple wound creation.

Allows for 6mm PMMA single-piece IOL implant removal and minimal induced astigmatism.  
 Allows for acrylic and silicone foldable IOL implant removal without the necessity to cut or bisect the optic.  
 Also allows for removal of Soemmerings ring, residual cortex and capsular tension ring (CTR).


## Markers for LASIK & LASEK

9-853



### Bennett-Thornton LASIK Marker


- Lowest profile with eight radial elements and non-radial element
- Round handle, length 128mm




Useful in re-aligning flap after repositioning following LASIK. Misalignment in any portion of flap can be readily seen since elements are at right angles to flap edges. The additional non-radial element is useful in the event of a free flap. This position permits surgeon to properly orientate flap and prevent flap from being laid upside down. Overall length of elements ensures flap edges will be included in the mark regardless of flap size. Open centre with pointer ensures simple and accurate marking on cornea. 45° angulation of head allows for ease and comfort in use.

9-854R

DK LASIK Marker




- Lowest profile with three radial elements and two non-radial elements
- Round handle, length 98mm




9-855

Gulani LASIK Marker




- 3.5mm and 4mm intersecting circles
- Round handle, length 122mm

Double circle marker (3.5mm and 4mm) provides pre-determined landmark (four reference points of two intersecting circles) for corneal flap replacement following excimer laser ablation of stromal bed in LASIK. Configuration of arcs of intersecting circles allows correct side-up placement of corneal flap.




**Specula - Single Piece**


All D&K specula are made from a single piece of titanium. There are no joints which create weak points in the construction.

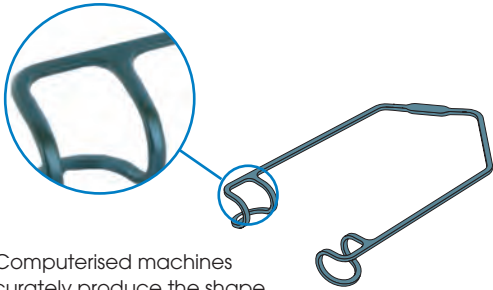


Computerised machines accurately produce the shape of the specula blades




Closed Blades



Open Blades



Solid Blades

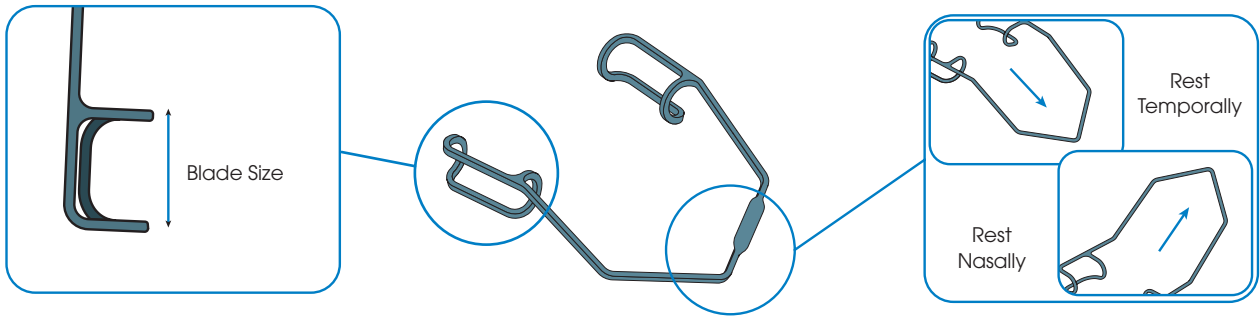


**Specula - Single Piece - Closed Blades**

9-550

Barraquer Adult Speculum, temporal


- 14.5mm closed blades
- Straight to rest temporally
- Single piece construction



9-551

Barraquer Adult Speculum, temporal


- 14.5mm closed blades
- Angled to rest temporally
- Single piece construction



9-552

**Barraquer Adult Speculum, nasal**


- 14.5mm closed blades
- Angled to rest nasally
- Single piece construction



9-552F

**Barraquer Adult Speculum, nasal**


- 14.5mm closed blades, heavy
- Angled to rest nasally
- Single piece construction



9-559

**DK Speculum, temporal**


- 14mm large closed blades
- Curved to rest temporally
- Single piece construction

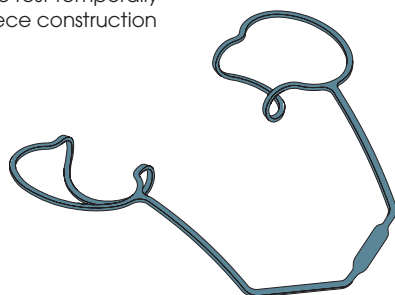

9-560

**DK Speculum, temporal**


- 14mm closed blades
- Curved to rest temporally
- Single piece construction

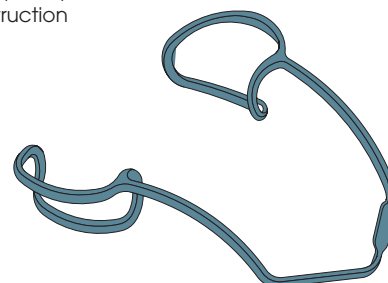

9-561

**DK Speculum, temporal**


- 14mm closed blades
- Angled to rest temporally
- Single piece construction



9-572

**Barraquer Paediatric Speculum, temporal**


- 6mm closed blades
- Straight to rest temporally
- Single piece construction



9-573

**Barraquer Paediatric Speculum, temporal**


- 9mm closed blades
- Angled to rest temporally
- Single piece construction



9-573-1

**Barraquer Paediatric Speculum, nasal**


- 9mm closed blades
- Angled to rest nasally
- Single piece construction



9-574

DK Neo-natal Speculum, temporal


- 4.4mm closed blades
- Angled to rest temporally
- Single piece construction



9-574-1

DK Neo-natal Strong Spring Speculum, temporal

- 4.4mm closed blades
- Strong spring closure
- Angled to rest temporally
- Single piece construction




**Specula - Single Piece - Open Blades**

9-555

Kratz Barraquer Speculum, temporal


- 14.5mm open blades
- Straight to rest temporally
- Single piece construction

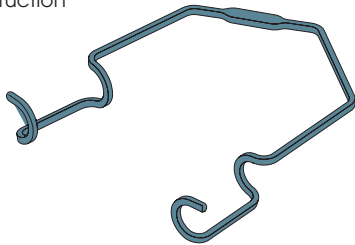

9-555F

Kratz Barraquer Speculum, temporal


- 14.5mm open blades
- Strong closing pressure
- Straight to rest temporally
- Single piece construction

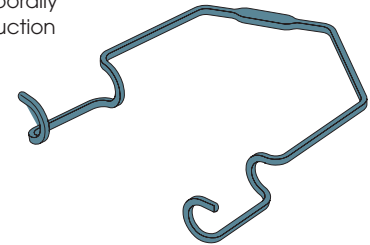

9-556

Kratz Barraquer Speculum, temporal


- 14.5mm open blades
- Angled to rest temporally
- Single piece construction



9-557

Kratz Barraquer Speculum, nasal


- 14.5mm open blades
- Angled to rest nasally
- Single piece construction



9-560-1

DK Speculum, temporal


- 14mm open blades
- Curved to rest temporally
- Single piece construction

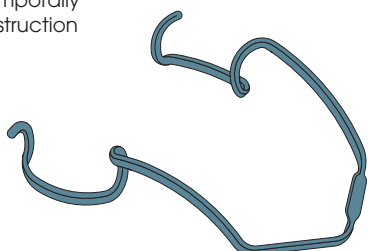

9-581F


Thornton Comfort Speculum, temporal

- 15mm open blades
- Angled to rest temporally
- Single piece construction




**Specula - Single Piece - Solid Blades****9-571-1****Barraquer Paediatric Speculum, temporal**

- 6mm solid blades
- Angled to rest temporally
- Single piece construction


**9-566****Bloomberg Solid Blade Speculum, temporal**

- 14.5mm solid blades
- Angled to rest temporally
- Single piece construction



## Specula - Adjustable

Main body is made from a single piece of titanium with added strength in the arms to give a rigid strong construction, which overcomes any attempt by patient to squeeze on the blades.

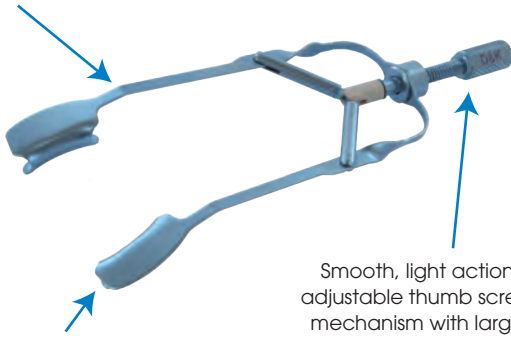

Blades are reduced in thickness to 0.5mm. This gives added comfort to the patient, yet the strength is not compromised

Smooth, light action adjustable thumb screw mechanism with large easy to grip knurled thimble



Blades slightly open. When closed they enable easy and comfortable entry



Blades can open to 30mm (without closing resistance)

## Specula - Adjustable - Closed Blades

9-577-3

### DK Closed Blade Adjustable Paediatric, temporal

- Paediatric 7mm closed blades
- Curved to rest temporally
- Rigid design
- Adjustable with thumb screw



9-578

### DK Closed Blade Adjustable Speculum, temporal

- 14.5mm closed blades, 1mm thick
- Curved to rest temporally
- Rigid design
- Adjustable with thumb screw



9-578-2

### DK Thin Closed Blade Adjustable Speculum, temporal

- 13.5mm closed blades, 0.5mm thick
- Curved to rest temporally
- Rigid design
- Adjustable with thumb screw



9-578-8

**VSL Ring Holding Adjustable Speculum, temporal**

- 15mm closed blades
- Curved to rest temporally
- Adjustable with thumb screw
- Grooves in the speculum blades are designed to hold two silicone bands that in turn support the VSL ring




(bands and VSL ring not supplied)

**Specula - Adjustable - Open Blades**

9-579

**Mackool Open Blade Adjustable Speculum, temporal**


- 13.5mm open blades, 1mm thick
- Curved to rest temporally
- Rigid design
- Adjustable with thumb screw

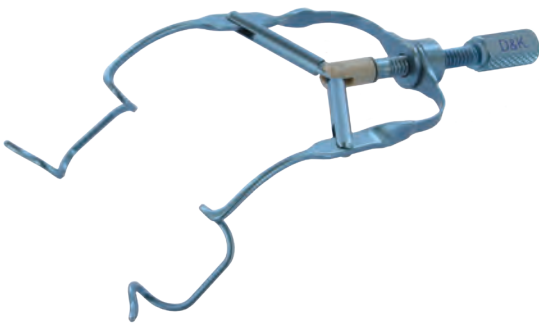

9-579-2

**DK Thin Open Blade Adjustable Speculum, temporal**


- 13.5mm open blades, 0.5mm thick
- Curved to rest temporally
- Rigid design
- Adjustable with thumb screw

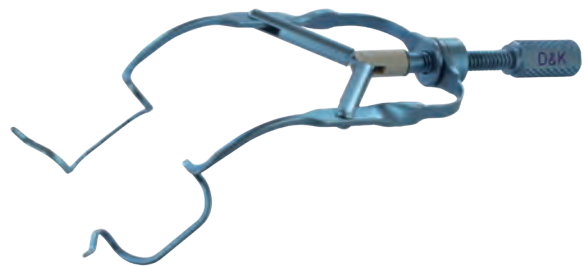

9-579-6


**DK Open Blade Adjustable Speculum, temporal**

- 14mm open blades
- Fine thin blades provide comfort for the patient
- Curved to rest temporally
- Rigid design
- Adjustable with thumb screw

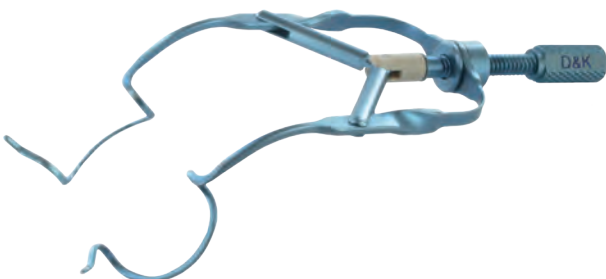

**Williams Adjustable LASIK Speculum, temporal**

- 18mm open blades
- Angled to rest temporally
- Adjustable with thumb screw

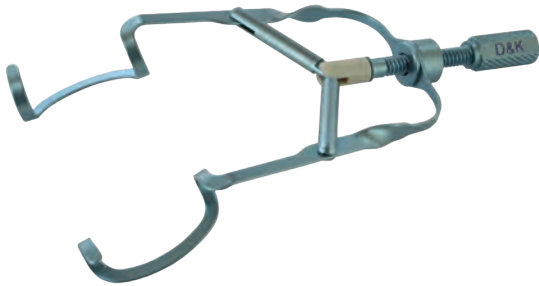

Designed to achieve maximum comfortable exposure of eye for suction ring placement, in order to allow microkeratome to be easily positioned on the pivot post without obstruction during LASIK surgery. Lengthened speculum blades accommodate microkeratome. Simplicity and elegance of design allows speculum to be used in other types of ocular surgery.

**Cionni Speculum, nasal**

- Ideal for surgeon performing anterior segment procedures from a temporal approach
- Nasal placement provides total access to temporal limbus
- Self-locking mechanism ideal for topical anaesthesia, since it prevents speculum from closing during procedure when patient blinks or squeezes
- Blades 14mm wide

Placed into palpebral fissure with locking mechanism situated nasally. Thumb plates are pressed together to open and capture lids. Crossing arms lock at four positions to accommodate various size palpebral fissures. Pressing thumb plates further releases locking mechanism, allowing surgeon easy removal of speculum. Releasable without opening to fullest extension, providing comfortable removal even in patients with small palpebral fissures.






9-588

**Buratto Adjustable Speculum, temporal**

- 15.5mm open blades
- Angled to rest temporally
- Adjustable with thumb screw

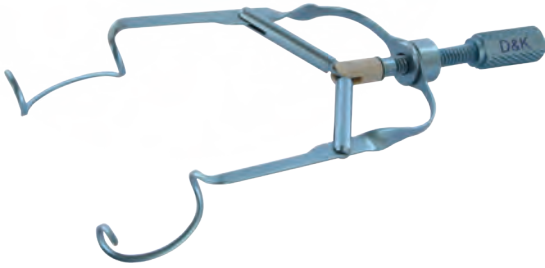

Lightweight, compact and strong. Maximum exposure allows application of suction ring and microkeratome run.

9-588-1

**R J Mackool™ Femtosecond Laser Speculum, temporal**

- 15.5mm open blades
- Curved to rest temporally
- Adjustable with thumb screw
- Suitable for femtosecond laser



Maximum blade exposure allows application of suction ring when using the LenSx® Laser. LenSx® is registered to Alcon LenSx Inc.

9-588-2

**Horn Adjustable Femtosecond Laser Speculum, temporal**

- 15.5mm open blades
- Curved to rest temporally
- Adjustable with thumb screw
- Suitable for femtosecond laser
- Can be used for cataract surgery and LASIK




The Horn Adjustable Femtosecond Laser Speculum has been designed with curved blades to allow clearance for docking devices, allowing exposure centrally without stretching the lids laterally, providing optimal exposure as well as patient comfort.

9-588-3

**Lieberman Adjustable Speculum, temporal**

- 15mm open blades
- Angled to rest temporally
- Adjustable with thumb screw

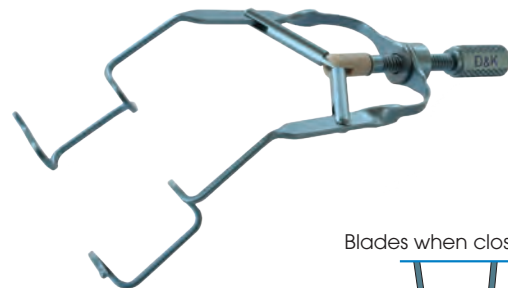


Blades when closed



9-589

**Buratto Adjustable Speculum, nasal**

- 15.5mm open blades
- Angled to rest nasally
- Adjustable with thumb screw

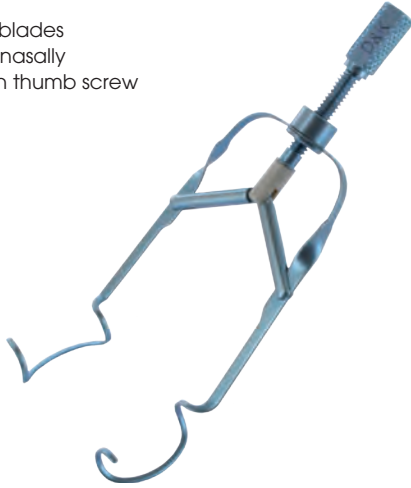

Lightweight, compact and strong. Maximum exposure allows application of suction ring and microkeratome run.

9-590

**Barrett Adjustable Speculum, temporal**

- 14.5mm open blades
- Angled to rest temporally
- Adjustable with thumb screw



Profile is similar to a wire type speculum; locking mechanism allows speculum to resist eyelid squeezing etc., especially during procedures with topical anaesthesia. Construction of speculum allows maximum exposure, resists eyelid compression and avoids any compression of globe.

9-591

**Barrett Adjustable Speculum, nasal**

- 14.5mm open blades
- Angled to rest nasally
- Adjustable with thumb screw



9-592

**Barrett Adjustable Speculum, temporal**

- 14.5mm open blades
- Straight to rest temporally
- Adjustable with thumb screw



9-597-1

**DK Adjustable Speculum, temporal**

- 14.5mm open blades
- Angled to rest temporally
- Adjustable with thumb screw



9-598-2

**Koch-Cionni Open Blade Adjustable Speculum, nasal**


- 13.5mm open blades
- Angled to rest nasally
- Adjustable with thumb screw

**Specula - Adjustable - Solid Blades**

9-576

**Khaw Standard Glaucoma Speculum, temporal**


- Central indent and side notch to achieve maximal exposure for glaucoma surgery
- Minimal pressure on eye
- 14mm solid blades
- Angled to rest temporally
- Adjustable with thumb screw

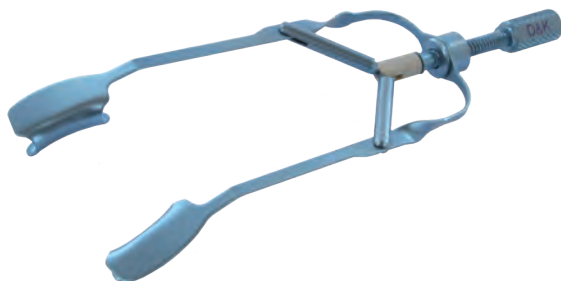

9-576-4

**DK Thin Blade Khaw Standard Glaucoma Speculum, temporal**


- Central indent and side notch to achieve maximal exposure for glaucoma surgery
- Minimal pressure on eye
- Thin blade thickness, 0.5mm
- 14.5mm solid blades
- Curved to rest temporally
- Adjustable with thumb screw

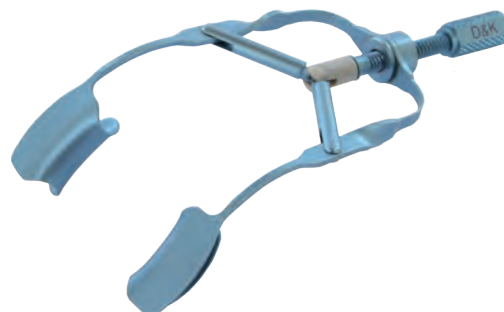

9-576-5

**Thin Blade Khaw Narrow Glaucoma Speculum, temporal**

- Central indent and side notch to achieve maximal exposure for glaucoma surgery
- Minimal pressure on eye
- Thin blade thickness, 0.5mm
- 14.5mm solid blades
- Narrow design for smaller opening eyes
- Curved to rest temporally
- Adjustable with thumb screw

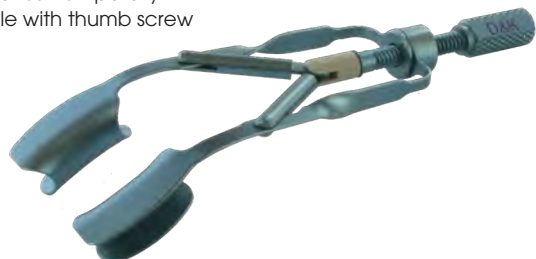

9-577-4

**DK Solid Blade Adjustable Paediatric Speculum, temporal**

- Paediatric 9.6mm solid blades
- Curved to rest temporally
- Rigid design
- Adjustable with thumb screw



9-595

### Mackool Adjustable Speculum, temporal

- 14.5mm solid blades
- Angled to rest temporally
- Adjustable with thumb screw




Not compressible and therefore eliminates narrowing of palpebral aperture by squeezing during topical anaesthesia cases. Allows maximum enlargement of interpalpebral space, critical for LASIK procedures. Surgeon's access to globe is unimpaired.

9-597

### DK Adjustable Speculum, temporal

- 14.5mm solid blades
- Angled to rest temporally
- Adjustable with thumb screw

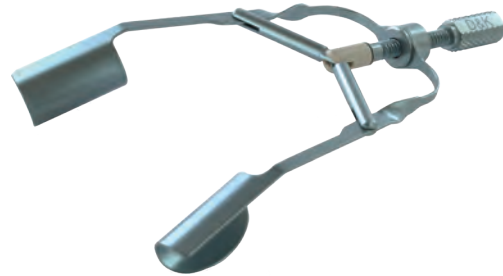

## Specula - Reversible Adjustable Speculum

9-599

### Shepard Reversible Speculum

- 14mm solid blades
- Angled to rest temporally or nasally
- Adjustable with thumb screw



9-599-1

### Shepard Reversible Speculum

- 14mm closed blades
- Angled to rest temporally or nasally
- Adjustable with thumb screw




Lightweight, adjustable speculum may be used for both temporal and conventional approach to surgery. Lightweight design avoids excessive pressure on globe.

# Duckworth & Kent Suggested Instrument Sets

## Suggested for You

Duckworth & Kent has produced a selection of suggested instrument sets for a variety of ophthalmic procedures. These are the instruments we recommend.

Visit our website or scan the QR code to view our suggested sets.

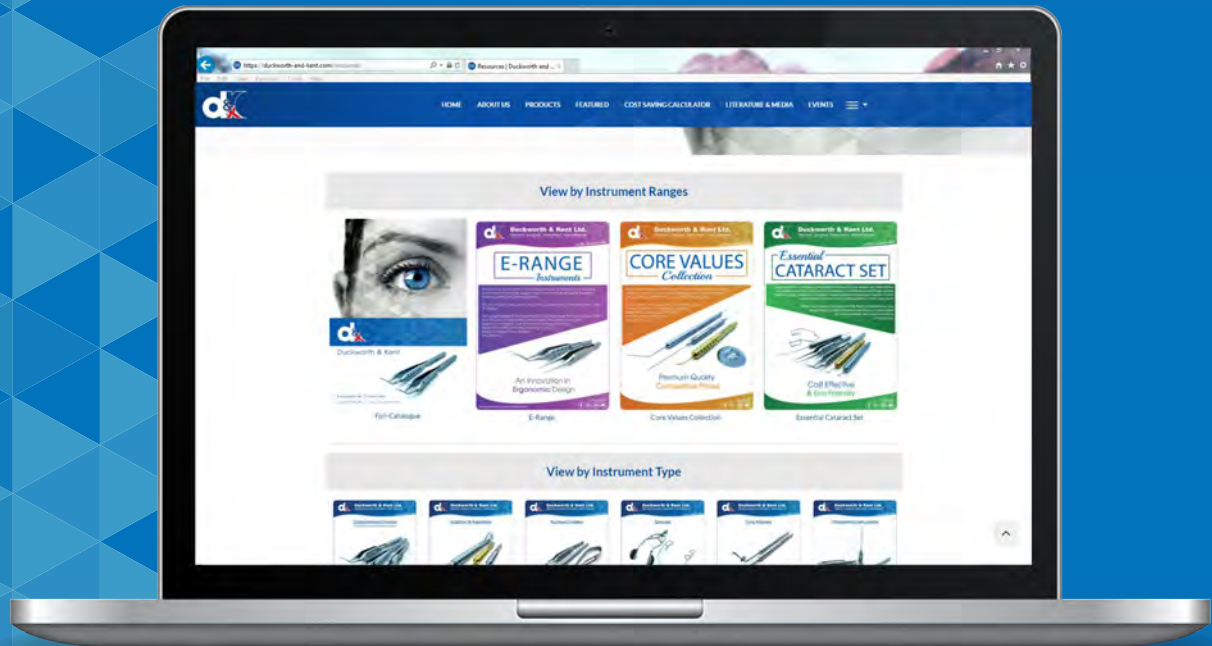

There are over 25 suggested sets including:

- Suggested Cataract Set
- Suggested Consulting Room / Eye Emergency Set
- Suggested Glaucoma Set
- Suggested IOL Removal Set
- Suggested Lacrimal Set
- Suggested Syringing Set
- Suggested Comprehensive Lid Set



# REUSABLE TITANIUM INSTRUMENTS




MANUFACTURED IN ENGLAND

# IOL Loading and Delivery System

IOL Folding  
IOL Insertion  
IOL Loading  
Injectors  
Vitrectomy Cannula Systems

# DK

## DK7710E




### IOL Holding Forceps

- 45° angled shafts, tip to angle length 7mm
- Highly polished inner jaw surfaces
- Flat handle, length 111mm
- Design registration number 004383396-0001



Highly polished inner jaw surfaces protect from scratching. Designed specifically for AcrySof IOL implant approved by Alcon.

## DK7717E



### IOL Loading Forceps

- For loading AcrySof IOL into the MONARCH II and III cartridges
- Highly polished tips protect from scratching the lens surface
- Round handle, length 119mm


**DK7717**

Alternative handle design also available. Visit [www.duckworth-and-kent.com](http://www.duckworth-and-kent.com)



The DK7717E Lens Loading Forceps are used to load the IOL into the cartridge. To ensure a successful IOL delivery and implantation, proper loading of the IOL implant into the cartridge is essential.

## DK7726



### Lens Loading Forceps


- For loading the TECNIS® 1-Piece IOL implant into the One Series™ Ultra Cartridge
- Polished tips protect from scratching the lens surface
- A stop ensures the IOL implant is not advanced beyond the recommended position in the cartridge
- 8mm diameter round handle, length 114mm



The DK7726 Lens Loading Forceps are used to load the AMO TECNIS® 1-Piece IOL implant into the AMO One Series Ultra Cartridge. To ensure a successful IOL delivery and implantation, correct loading and setting of the IOL implant into the cartridge is essential.



DK7740E



### IOL Insertion Forceps

- Highly polished inner jaw
- Biconvex jaw design
- 40° angled shafts, tip to angle length 7.5mm
- Flat handle, length 107mm
- Design registration number 004383396-0001



Highly polished inner jaw surface protect from scratching the lens surface. Designed specifically for AcrySof IOL implant approved by Alcon.

DK7791

## Screw Thread Injector



- Suitable for the AMO One Series™ Ultra Cartridge
- Quick and easy snap in design for secure cartridge loading
- Capsular friendly tip assist lens manipulation post implantation
- Screw thread delivery for efficient lens implantation
- Rapid screw thread gives a smooth predictable lens delivery
- Injector separates to expose internal parts for cleaning
- Injector length (without cartridge) 148mm

The thread engages at the IOL implant pre-load position, reducing the screw movement for the surgeon during final delivery. To ensure a successful IOL delivery and implantation, correct loading and setting of the IOL implant into the cartridge is essential. Duckworth & Kent always recommends using the Loading Forceps (DK7726) which feature highly polished surfaces for easier loading without any damage to the IOL implant. The forceps correctly load the IOL implant into the cartridge in a pre-load position.

DK7797-2

▶ Video Available

## Single Handed Injector with pre-load position



- Suitable for Alcon MONARCH® IIID, IIIC and IIB cartridges
- Front loading cartridge, secured by rotating sleeve
- Single handed delivery for efficient lens implantation
- Pre-load position, reducing final plunger movement
- Injector separates to expose internal parts for cleaning
- Injector length (without cartridge) 157mm

The injector's tip will stop at the IOL implant pre-load position, reducing the plunger movement for the surgeon during final delivery. The delivery process can be carried out single handed.

To ensure a successful IOL delivery and implantation, correct loading and setting of the IOL implant into the cartridge is essential. Duckworth & Kent always recommends using the Loading Forceps (DK7717) which feature highly polished surfaces for easier loading without any damage to the IOL implant. The forceps correctly load the IOL implant into the cartridge in a pre-load position.

DK7797-3

Screw Thread Injector

- Suitable for Alcon MONARCH® IID, IIC and IIB cartridges
- Front loading cartridge, secured by rotating sleeve
- Screw thread delivery for efficient lens implantation
- Rapid screw thread gives a smooth predictable lens delivery
- Injector separates to expose internal parts for cleaning
- Injector length (without cartridge) 152mm

The thread engages at the IOL implant pre-load position, reducing the screw movement for the surgeon during final delivery. To ensure a successful IOL delivery and implantation, correct loading and setting of the IOL implant into the cartridge is essential. Duckworth & Kent always recommends using the Loading Forceps (DK7717E) which feature highly polished surfaces for easier loading without any damage to the IOL implant. The forceps correctly load the IOL implant into the cartridge in a pre-load position.

DK7605

▶ Video Available

## 25 Gauge Vitrectomy Cannula System



25 Gauge Cannula System, consists of:

- 3 x Instrument Cannulas, ref: 8-640
- 3 x Cannula Plugs, ref: 8-642
- 1 x Infusion Cannula, ref: 8-641
- 1 x Cannula Inserter, ref: 6-190
- 1 x Cannula Loading Forceps, ref: 2-2-832
- 1 x Fine Fixation Ring with Calliper, ref: 9-513-3
- 1 x Sterilising Tray, ref: T7003-2

Duckworth & Kent has developed the Naito 25 Gauge Cannula System which allows a range of small incision vitrectomy instruments to pass through the cannula and into the posterior segment. The system permits a complete sutureless surgical procedure through a small incision that minimises the potential for surgical trauma.

DK7610

▶ Video Available

## 23 Gauge Vitrectomy Cannula System



23 Gauge Cannula System, consists of:

- 3 x Instrument Cannulas, ref: 8-640-2
- 3 x Cannula Plugs, ref: 8-642-1
- 1 x Infusion Cannula, ref: 8-641-2
- 1 x Cannula Inserter, ref: 6-190-1
- 1 x Cannula Loading Forceps, ref: 2-2-832
- 1 x Fine Fixation Ring with Calliper, ref: 9-513-3
- 1 x Sterilising Tray, ref: T7003-2

Duckworth & Kent has developed the 23 Gauge Cannula System which allows a range of small incision vitrectomy instruments to pass through the cannula and into the posterior segment. The system permits a complete sutureless surgical procedure through a small incision that minimises the potential for surgical trauma.

# Care and Repair

## Care and Handling

Effective reprocessing and correct handling of Duckworth & Kent ophthalmic surgical devices will prolong their life and ensure they are reliable and safe during operation.

Duckworth & Kent manufacture their products from quality sourced materials. Titanium, the primary material for all Duckworth & Kent devices, can withstand repeat sterilisation without compromise to the devices edge or surface quality. It is corrosion resistant, not just to steam, but to a vast range of chemicals (acids and alkalis), making it ideal for the harsh environments devices are exposed to during cleaning.

Other materials used include the plastics PEEK, Ultem and PTFE. These plastics are strong and durable and can withstand repeated cleaning and sterilisation at temperatures up to 170°C.

Scan the QR code for complete information on our Care and Handling, Guidelines for Reprocessing



---

## Repair Service

Our experience indicates that the high precision instruments used with the operating microscope require regular maintenance to ensure constant high performance and long life. Duckworth & Kent offers a fast turnaround to repair and service hand held surgical instruments, including diamond knives.

- We always provide a quality, professional service utilising our technologically advanced in-house facilities.
- We aim to achieve a fast and efficient turnaround.
- D&K instruments are repaired by highly skilled craftsmen, ensuring that any small imperfections are not overlooked.
- We repair all Duckworth & Kent ophthalmic surgical instruments including diamond knives.


---

**Before we carry out any work or repairs on any instrument we will require proof that the instrument has been decontaminated.**


---

If you are unable to provide the relevant documentation / certificate to confirm decontamination and you are aware that this process has been performed then please download and complete a decontamination form.

Scan the QR code for our decontamination forms.



# REUSABLE TITANIUM INSTRUMENTS

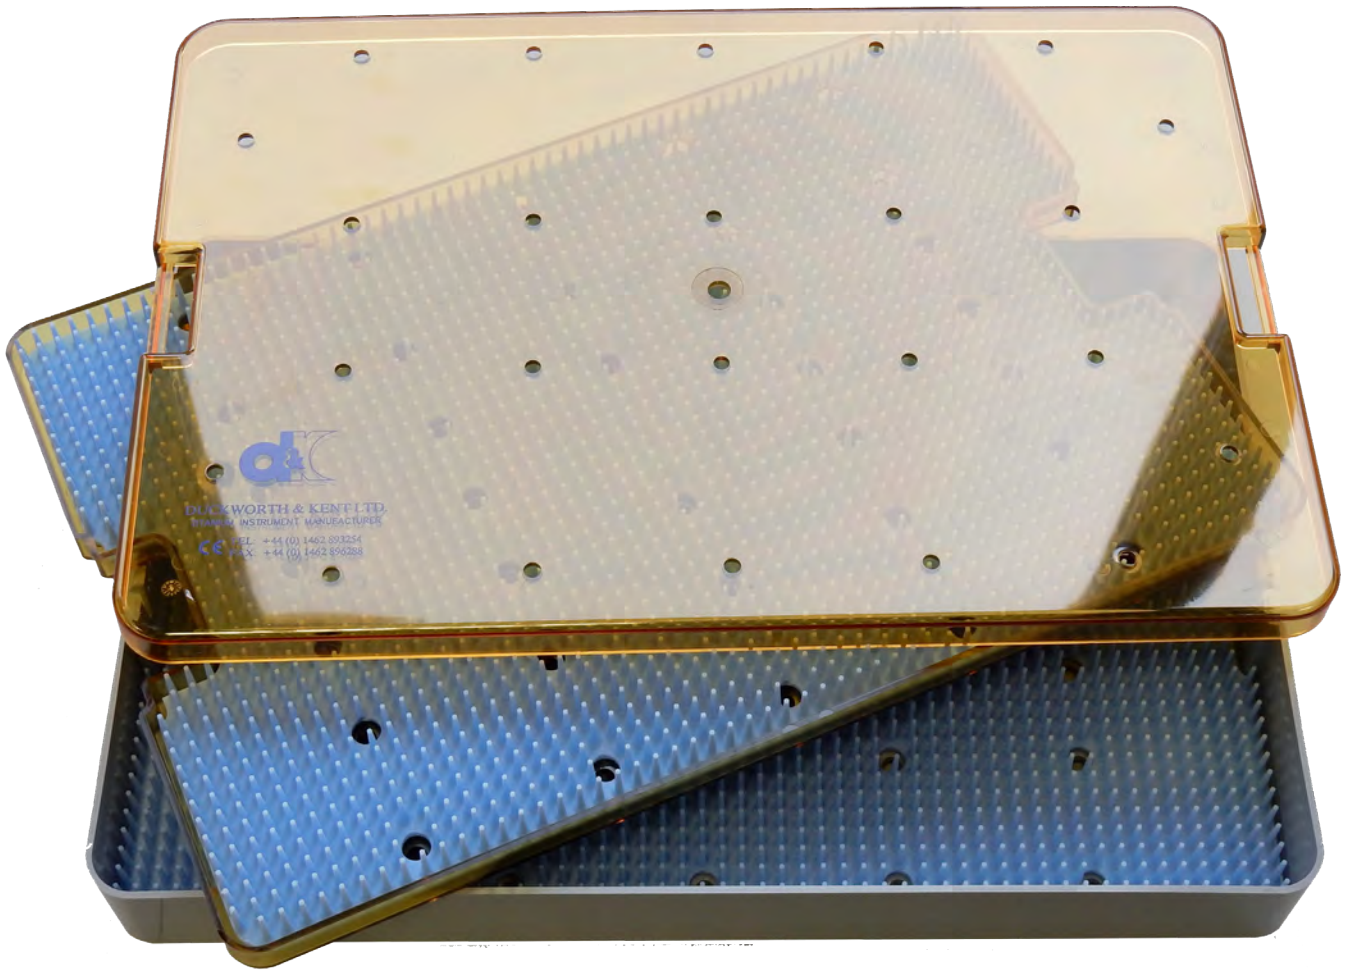

MANUFACTURED IN ENGLAND

# Sterilising Trays

Sterilising Trays  
Sterilising Cases



## Sterilising Trays

T7003-1

### Sterilising Tray suitable for 4 instruments


- External dimensions: 160mm x 70mm x 25mm
- Suitable for 4 instruments
- One silicone mat



DK7003

### Sterilising Tray suitable for 6 instruments


- External dimensions: 173mm x 110mm x 25mm
- Suitable for 6 instruments
- One silicone mat

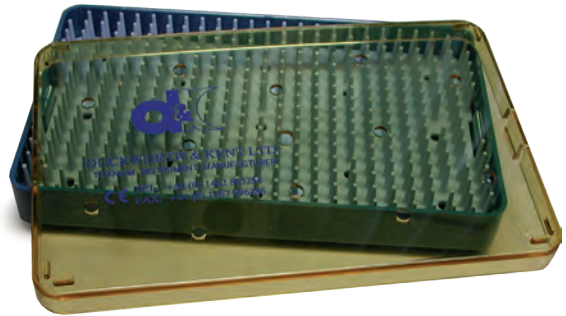

T7010

### Sterilising Tray suitable for 10 instruments


- External dimensions: 264mm x 162mm x 25mm
- Suitable for 10 instruments
- One silicone mat

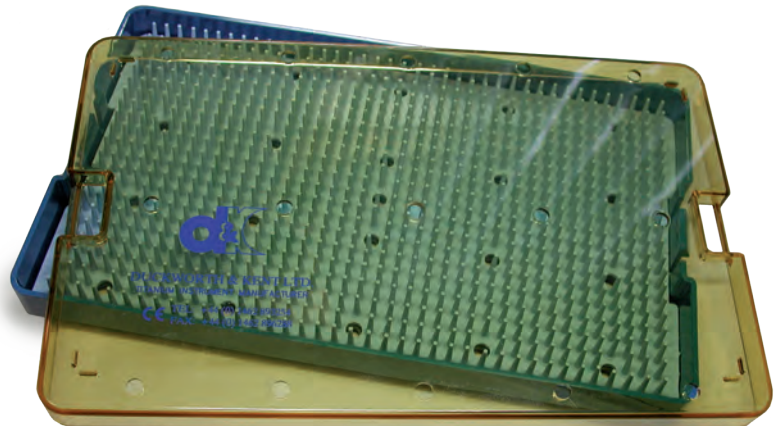

T7010-2

### Sterilising Tray suitable for 20 instruments

- External dimensions: 264mm x 162mm x 45mm
- Suitable for 20 instruments
- Second internal middle tray
- Two silicone mats

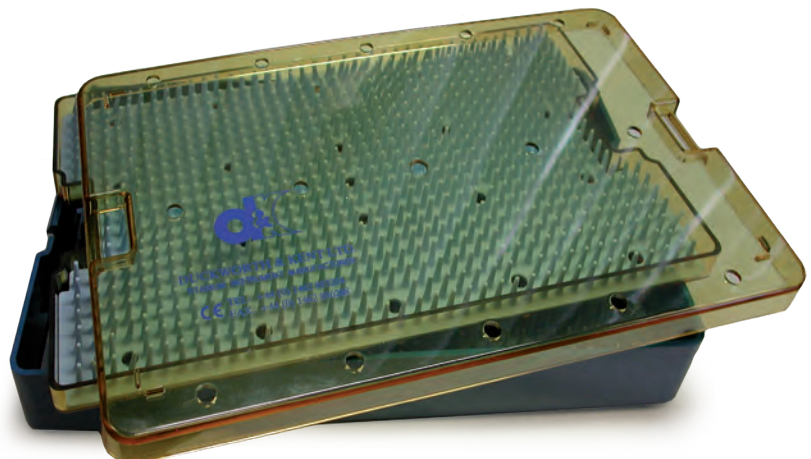




## T7020

**Sterilising Tray suitable for 20 instruments**


- External dimensions: 395mm x 266mm x 25mm
- Suitable for 20 instruments
- One silicone mat

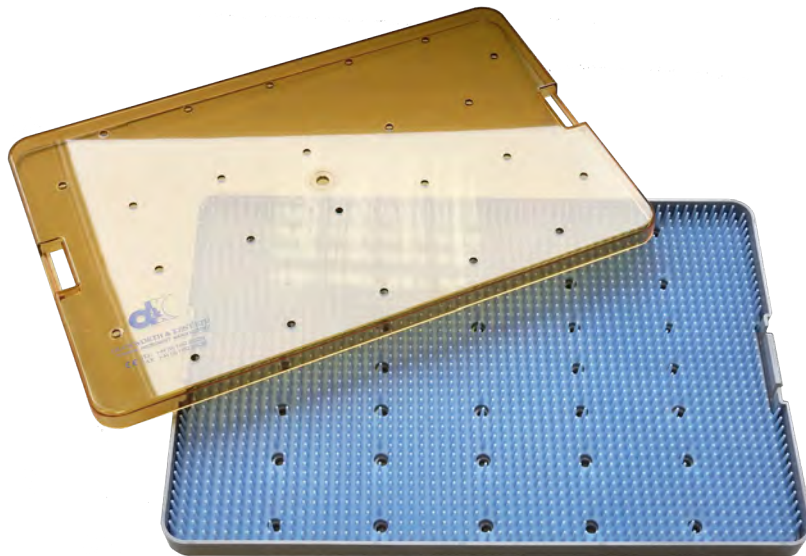

## T7020-2

**Sterilising Tray suitable for 40 instruments**


- External dimensions: 395mm x 266mm x 50mm
- Suitable for 40 instruments
- Second internal middle tray
- Two silicone mats

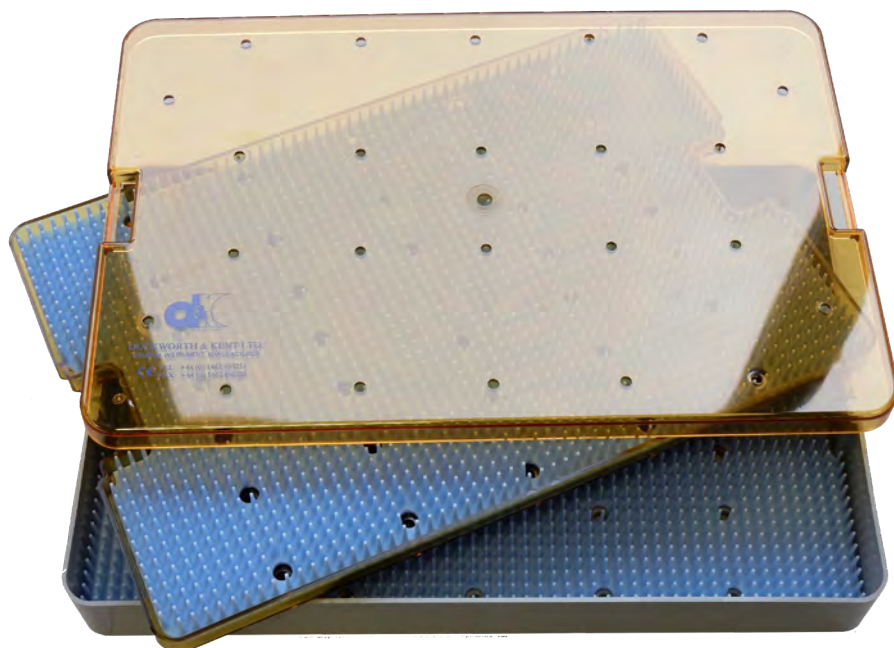

T7000

### Sterilising Tray suitable for 2 Diamond Knives

- External dimensions: 160mm x 70mm x 25mm
- Suitable for 2 diamond knives
- Two silicone bars

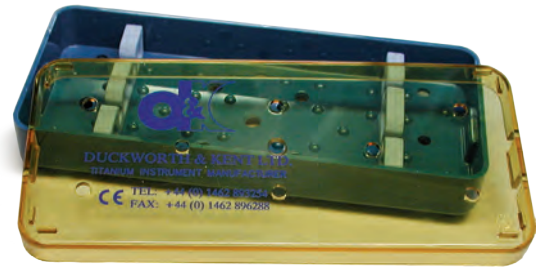

T7003-2

### Sterilising Tray and Insert For Retinal Cannula Sets

- External dimensions: 160mm x 70mm x 25mm

Designed to hold 23 or 25 Gauge Vitrectomy Cannula System, including:

- 4 Instrument cannulas and instrument cannula plugs
- Infusion cannula and silicone line
- Cannula inserter
- Fixation ring (with or without caliper)
- Cannula loading forceps




DK7003-2

### Vitrectomy Instruments Sterilising Tray, suitable for 2 Instrument Heads

- External dimensions: 173mm x 110mm x 25mm
- One silicone mat

Designed to hold one handle, up to two heads, one cleaning guard and adaptor.

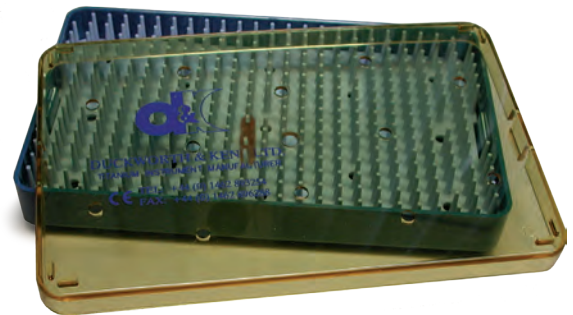


T7010-5

### Vitrectomy Instruments Sterilising Tray, suitable for 4 Instrument Heads

- External dimensions: 264mm x 162mm x 25mm
- One silicone mat

Designed to hold two handles, up to four heads, one cleaning guard and adaptor.

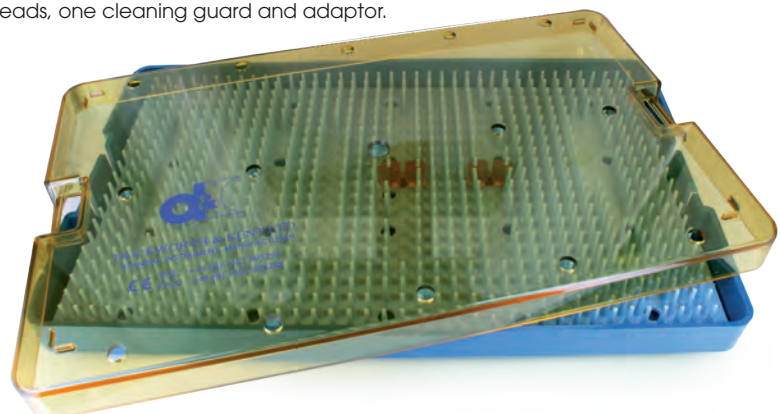

## Sterilising Cases

6-135

### Mackool Holder and Sterilising Case

- External dimensions: 19mm diameter, 12mm height
- Internal dimensions: 15mm diameter, 10mm height
- Made from titanium



6-135-1

### Mackool Holder and Sterilising Case

- External dimensions: 19mm diameter, 12mm height
- Internal dimensions: 15mm diameter, 10mm height
- Made from Ultem, a semi-transparent orange coloured plastic



6-138

### Sterilising Case for Retinal Cannula Plugs

- External dimensions: 19mm diameter, 13mm height
- Secures up to 8 cannula plugs
- Made from Ultem, a semi-transparent orange coloured plastic



# REUSABLE TITANIUM INSTRUMENTS



MANUFACTURED IN ENGLAND

# Index - Numerical

Scissors  
Forceps  
Needle Holders  
Diamond Knives  
Hooks, Probes, Manipulators and Miscellaneous  
Punches and Inserters  
Irrigation and Aspiration  
Fixation Rings, Gauges, Markers and Specula  
IOL Loading and Delivery Systems  
Sterilising Trays

Product No.	Page
1-110	18
1-111	18
1-111B	18
1-112	18
1-116	13
1-118	13
1-120	18
1-121	18
1-122	19
1-210	14
1-211	14
1-211B	15
1-218	13
1-219	14
1-227	13
1-312	19
1-400	14
1-401	14
1-410	14
1-411	14
1-500	17
1-500B	17
1-501	17
1-501B	17
1-510	13, 17
1-512	17
1-625	13
1-630	13
1-700	15
1-705	15
1-805	15
1-841	15
1-841B	15
1-841BN	16
1-841N	16
1-842	16
1-842N	16

2-100-1E	46
2-100D	44
2-100E	44
2-100N	44
2-101D	45
2-101E	45
2-103	45
2-103E	45
2-104	45
2-104E	45
2-104N	45
2-108	56
2-108E	56
2-108N	56
2-110-1E	51
2-110-3E	51
2-110E	51
2-111E	51
2-114-5NR8	52
2-114E	51
2-114ER8	52
2-115N	52
2-116	55
2-116E	55
2-116N	55
2-117	56
2-117E	56
2-118E	55
2-130D	37,46
2-130E	37,46
2-132E	36,52
2-135E	36,53
2-135ER8	53
2-135NR	36,53
2-144E	54
2-160	44,56
2-167E	38

2-170E	40
2-185	40
2-195	34
2-195-1	34
2-195NR8	34
2-196	34
2-200	46
2-200E	46
2-214E	36,54
2-215E	36,54
2-2195E	34
2-2-706G	24
2-2-706G-1	24
2-2-706G-1R	24
2-2-706GR	24
2-2-716G-10	28
2-2-716G-8	25
2-2-716G-8RS	25
2-2-716G-8S	25
2-2-716G-9	26
2-2-716G-9RS	26
2-2-716G-9S	26
2-2-787-1	41
2-787-1E	41
2-2-817-1	47
2-817-1E	47
2-2-832	50
2-285	40
2-285E	40
2-287	40
2-287E	40
2-401NR8	46,57
2-500-1E	61
2-500-1E	61
2-500-4E	38
2-500-4N	38
2-500E	60
2-500N	60
2-501-2E	38
2-501E	59

2-501N	60
2-502E	38
2-503E	38
2-504	61
2-504-1NR8	62
2-504E	61
2-504ER8	61
2-504N	61
2-504NR	61
2-504NR8	61
2-505	60
2-505-4N	39
2-505E	60
2-505ER8	60
2-505N	60
2-505NR	60
2-505NR8	60
2-510	39
2-510-1E	40
2-510-1N	40
2-510N	39
2-520	57
2-520E	57
2-522E	57
2-522N	57
2-524-1E	58
2-524-1N	58
2-524D	58
2-524E	58
2-524N	58
2-526E	58
2-527	59
2-527E	59
2-529	59
2-529-1NR8	59
2-529-1ER8	59
2-529E	59
2-529N	59
2-635	41
2-640	35

2-660	62	2-716GN-2E	28	2-877N	50		
2-685	35,39	2-716GN-3E	29	2-878-1	49		
2-686	35,39	2-716GN-4E	29	2-878-1N	50		
2-687	35,39	2-716GN-5E	29	2-879	49		
2-695	43	2-716GNR8E	29	2-879N	50	4-100	74
2-700	41	2-716GNR8-2E	30	2-896-2	42	4-115	74
2-706GE	24	2-716GNR8-3E	30	2-896-3	42	4-122	74
2-706G-1E	24	2-716GNR8-4E	30	2-896-3	42	4-125	74
2-706G-1RE	24	2-716GNR8-5E	30	2-900E	49	4-402	75
2-706GRE	24	2-716GW	31	2-920	63	4-406	75
2-712-3ER8	23	2-716GW-2	31			4-415	75
2-712-4ER8	23	2-716GWR8-2	31			4-416	76
2-714-3ER8	23	2-718-3E	23			4-430	76
2-716G-8E	25	2-719-3E	23			4-438	76
2-716G-8RE	25	2-719-4E	23	3-201	68	4-440	76
2-716G-8RSE	25	2-754	44	3-202	68	4-460	76
2-716G-8SE	25	2-770E	42	3-203	69	4-480	75
2-716G-9E	26	2-774-1E	42	3-203-1	70	4-590	74
2-716G-9RE	26	2-795E	41	3-205	67	4-600	74
2-716G-9RSE	26	2-796E	42	3-206	67	4-620	80
2-716G-9SE	26	2-802E	48	3-207	67	4-620-2	80
2-716G-10E	28	2-803E	49	3-208	67	4-620-3	80
2-716G-10RE	28	2-815E	47	3-218	68	4-620-4	80
2-716GE	31	2-817E	47	3-218-1	68	4-621	80
2-716GE-1	32	2-817-1E	47	3-222	69		
2-716GE-1S	32	2-818E	47	3-223	69		
2-716GE-2	32	2-820E	47	3-302	70		
2-716GE-3	32	2-820-1E	48	3-303	70		
2-716GER8	32	2-821E	48	33-202	69		
2-716GER8-1	33	2-831	50	33-203	69	5-300-1	77
2-716GER8-1S	33	2-832E	50	33-222	69	5-305-1	80
2-716GER8-2	33	2-835	62	33-223	70	5-310-1	77
2-716GER8-3	33	2-835E	62	33-225	70	5-329-1	77
2-716GN-4	29	2-835N	62	33-303	70	5-330-1	77
2-716GNR8-1	29	2-836E	62	3-420	68	5-340-1	78
2-716GNR8-2	30	2-837	62	3-422	68	5-360-1	78
2-716GNR8-3	30	2-838	41	3-423	68	5-362	79
2-716GNR8-4	30	2-839	63				
2-716GNR8-5	30	2-847-4	33				
2-716GNE	28	2-877	49				

4

3

5

6-069	90	6-090-2	91	6-257	97	6-610	108
6-071	83	6-090-3	92	6-258	97	6-615	104
6-072-1	83	6-090-4	92	6-400	97	6-615-1	105
6-074-1	84	6-090-6	92	6-400-1	98	6-615-2	105
6-074-2	84	6-090-7	92	6-411	98	6-620	107
6-075	84	6-090-8	92	6-417	98	6-625	107
6-075-1	84	6-091	89	6-418	98	6-626	107
6-076	84	6-093	92	6-418-1	98	6-626-1	107
6-077	85	6-095	92	6-418-2	98	6-626-2	107
6-079	85	6-099	93	6-418-3	99	6-627	107
6-079-1	85	6-099-1	93	6-450	99	6-627-1	107
6-080	85	6-099-2	93	6-460	99	6-627-5	108
6-080-2	85	6-099-3	93	6-462-2	99	6-628	108
6-080-3	85	6-099-4	93	6-464	99	6-629	108
6-081	86	6-100	94	6-464-1	99	6-630	108
6-081-3	86	6-101	94	6-466	100	6-635-2	105
6-083	86	6-102	94	6-467	100	6-635-3	105
6-083-1	86	6-103-1	94	6-469	100	6-635-4	105
6-083-4	86	6-105-1	94	6-469-1	100	6-641	104
6-083-5	87	6-107	94	6-470	100	6-641-1	104
6-085	87	6-112	96	6-472	101	6-641-2	104
6-085-1	87	6-124	96	6-472-1	101	6-641-3	104
6-085-2	90	6-130	95	6-472-4	101	6-641-4	104
6-085-3	87	6-135	95,178	6-476	101	6-645	106
6-085-4	90	6-135-1	95,178	6-479	101	6-656	109
6-085-6	88	6-138	95,178	6-481	101	6-656-1	109
6-085-7	88,91	6-140	95	6-482	102	6-656-2	109
6-085-8	88	6-180	109	6-490-1	102	6-656-3	109
6-086	88	6-180-1	109	6-491-2	102	6-656-4	109
6-086-1	89	6-181	109	6-491-3	102	6-656-5	109
6-086-4	89	6-182-2	109	6-494	102	6-664	109
6-086-5	89	6-190	115	6-495	102	6-665	110
6-086-6	89	6-190-1	115	6-496	103	6-667	110
6-086-7	89	6-245	96	6-496-1	103	6-667-2	110
6-087	91	6-249	96	6-496-2	103	6-667-3	110
6-087-1	91	6-250	96	6-500	103	6-667-4	110
6-090	91	6-250-1	96	6-510	103	6-667-6	110
		6-250-2	97	6-600	106	6-667-7	110
		6-251	97	6-604	106	6-667-8	110
		6-256	97	6-607	106	6-670	111



6-670-1	111	6-960-1	115	8-640-9	126	8-731	133
6-675	114			8-641	127	8-731-1	133
6-675-1	114			8-641-1	127	8-731-2	133
6-676	16,50,114			8-641-2	127	8-731-3	133
6-700	115			8-641-3	127	8-731-4	133
6-800	35,115	7-101	119	8-641-4	127	8-731-6	133
6-805	35,115	7-102	119	8-641-6	127	8-732	133
6-820	103	7-105	119	8-641-7	127	8-732-1	133
6-835	116	7-810	119	8-641-8	128	8-732-3	133
6-836	116	7-811	119	8-641-9	128	8-732-4	133
6-836-1	116	7-812	119	8-642	126	8-732-5	133
6-836-2	116	7-818	120	8-642-1	126	8-732-6	133
6-837	116			8-644	128	8-732-7	133
6-839	116			8-644-1	128	8-732-8	133
6-848	95			8-650	129	8-810	130
6-850	95			8-650-1	129		
6-855	111	8-001	123	8-650-2	130		
6-855-1	111	8-050	123	8-652	128		
6-856	111	8-601	123	8-652-1	128		
6-857	111	8-601-1	123	8-652-1S	128	9-503	137
6-858	112	8-601-2	123	8-652S	128	9-509	138
6-859	112	8-601-3	123	8-655	130	9-510	137
6-866	112	8-602	123	8-655-1	130	9-510R	137
6-870	112	8-603	123	8-655-2	130	9-513-1	138
6-870-1	112	8-604	124	8-657	129	9-513-3	138
6-912	114	8-605	124	8-657S	129	9-515R	137
6-912-1	114	8-607-2	124	8-700	131	9-518-1	139
6-924	113	8-609	124	8-701	131	9-518-1R	139
6-925	113	8-609-1	124	8-702	131	9-518-2	139
6-926	113	8-609-2	124	8-703	131	9-518-2R	139
6-928	113	8-615-1	125	8-705	132	9-518-3	139
6-929	113	8-616	125	8-706	132	9-518-4	139
6-930	113	8-616-1	125	8-711-1N	132	9-526-2	138
6-944	113	8-635	125	8-711-1NL	132	9-544	140
6-944-1	113	8-635-3	125	8-711N	132	9-544-1	140
6-945	113	8-640	126	8-711NL	132	9-544-2	140
6-945-1	113	8-640-10	126	8-720	124	9-544-3	140
6-946	113	8-640-2	126	8-730	133	9-544-4	140
6-947	113	8-640-6	126	8-730-1	133	9-550	153
6-960	115	8-640-7	126	8-730-2	133	9-551	153

7

8

9

9-552	154
9-552F	154
9-555	155
9-555F	155
9-556	155
9-557	155
9-559	154
9-560	154
9-560-1	155
9-561	154
9-566	156
9-571-1	156
9-572	154
9-573	154
9-573-1	154
9-574	155
9-574-1	155
9-576	162
9-576-4	162
9-576-5	162
9-577-3	157
9-577-4	162
9-578	157
9-578-2	157
9-578-8	158
9-579	158
9-579-2	158
9-579-6	158
9-581F	155
9-583	159
9-585	159
9-588	160
9-588-1	160
9-588-2	160
9-588-3	160
9-589	161
9-590	161
9-591	161
9-592	161
9-595	163

9-597	163
9-597-1	161
9-598-2	162
9-599	163
9-599-1	163
9-649	141
9-650	141
9-687	142
9-687-1	142
9-687-2	142
9-687-3	142
9-687-4	142
9-687-5	142
9-687-6	143
9-687-7	143
9-692	141
9-692-1	141
9-700	143
9-701R	143
9-705R	143
9-705R-1	144
9-706	144
9-706-1	144
9-706-2	144
9-715-1	147
9-715W	147
9-716W	147
9-716W-1	148
9-729	145
9-729-1	145
9-730	145
9-732	145
9-733	145
9-734	146
9-745	146
9-749	146
9-778	147
9-779	147
9-780	148
9-780W	148

9-781	148
9-781W	148
9-784	147
9-788	148
9-789W-1	148
9-830	146
9-840	149
9-840-1	149
9-840-2	149
9-840-3	149
9-841	149
9-841-1	149
9-841-2	150
9-841-3	150
9-841-4	150
9-842-1	150
9-845	152
9-845-2	152
9-846	152
9-847	152
9-853	152
9-854R	153
9-855	153

T

T7000	177
T7003-1	175
T7003-2	177
T7010	175
T7010-2	175
T7010-5	177
T7020	176
T7020-2	176

DK

DK7003	175
DK7003-2	177
DK7605	171
DK7610	171
DK7710E	42,167
DK7717	43,167
DK7717E	43,167
DK7726	43,167
DK7740E	43,168
DK7791	169
DK7797-2	169
DK7797-3	170

## Why choose a Duckworth & Kent instrument?

- When you buy a Duckworth & Kent instrument you are investing in a product that will last you for many years and countless procedures.
- Duckworth & Kent's precision reusable instruments are made of high quality titanium alloy, conferring many advantages over stainless steel alternatives:
  - Titanium is lightweight and non-reflective when compared with stainless steel; properties which are invaluable when performing delicate intra-ocular surgery.
  - Titanium is corrosion resistant, non-magnetic and more durable than stainless steel ensuring greater performance when undertaking extra-ocular surgery such as suturing.
- The decision between choosing our titanium reusable instruments over single-use alternatives is a simple one. Not only are our high precision reusable titanium instruments more cost-beneficial in the long term, they also have a lower impact on the environment.
- When you buy one of our products you have access to our unparalleled after-care service. At Duckworth & Kent we are passionate about providing efficient post-sales customer support, including online advice on the cleaning and sterilisation of equipment. In the rare event of an instrument requiring a repair, we will provide this service with a quick turnaround time.
- Our family-run business has over 60 years of engineering experience and expertise, designing and manufacturing products in-house with rigorous quality control. Our engineers are continuously refining our armamentarium of ophthalmic instruments with the aid of key opinion leaders to meet the exacting standards of our customers who strive to deliver the best outcomes for their patients.

# REUSABLE TITANIUM INSTRUMENTS



MANUFACTURED IN ENGLAND

# Index - Alphabetical

Scissors  
Forceps  
Needle Holders  
Diamond Knives  
Hooks, Probes, Manipulators and Miscellaneous  
Punches and Inserters  
Irrigation and Aspiration  
Fixation Rings, Gauges, Markers and Specula  
IOL Loading and Delivery Systems  
Sterilising Trays

# A

Adjustable Hanasaki Lid Retractor, 5mm	108
Adjustable Speculum, temporal	161,163
Air Injection Cannula, 23 Gauge	124
Akahoshi Prechopper Forceps	47
Akahoshi Nucleus Sustainer	92
Angled Retractable Diamond Knife, 1.8mm Spear	75
Angled Retractable Diamond Knife, 2.2mm Spear	75
Angled Retractable Diamond Knife, 2.4mm Spear	76
Angled Retractable Diamond Knife, 2.5mm Spear	75
Angled Retractable Diamond Knife, 2.7mm - 2.9mm Tapered	76
Angled Retractable Diamond Knife, 2.8mm Spear	76
Angled Retractable Diamond Knife, 2mm Dome	75
Angled Retractable Diamond Knife, 3.2mm Spear	76
Angled Retractable Diamond Knife, 3mm Spear	76
Angled Tying Forceps, 10.5mm tip to angle	58,59
Angled Tying Forceps, 10mm tip to angle	58,59
Angled Tying Forceps, Dolphin Handle	58
Anwar Corneal Scissors, Curved to Left	14
Anwar Corneal Scissors, Curved to Right	13
Anwar Keratoplasty Hook	96
Anwar Keratoplasty Spatula	93
Araslan Nucleus Chopper and Spatula, designed for left side port	84
Aspiration Handpiece, 21 Gauge & 23 Gauge	129,130
Aspiration Tips	133
Assaf Resection Muscle Hooks	107
Asymmetrical Forceps Head 23 Gauge	50
Avolio Aspiration Handpiece, 21 Gauge	130
Avolio Irrigation Handpiece, 21 Gauge	130
Axis Marker	145,150
Axis Marker, 2 blades	145

# B

Barraquer Adult Speculum	153
Barraquer Adult Speculum, nasal	154
Barraquer Adult Speculum, temporal	153
Barraquer Needle Holder, Curved	70
Barraquer Needle Holder, Curved with lock	70
Barraquer Paediatric Speculum, nasal	154
Barraquer Paediatric Speculum, temporal	154,156
Barraquer Style Iris Spatula	94
Barrett Adjustable Speculum, nasal	161
Barrett Adjustable Speculum, temporal	161
Barrett Dual Axis Toric Marker	150
Barrett Duo Nucleus Rotator / Manipulator / Splitter	87
Barrett I/A Handpiece, 16 Gauge	131
Barrett LeClip Utility Clamp	35,115
Barrett Modified Lens Loop	108
Barrett Nucleus Divider and Chopper	88
Barrett Nucleus Expressor	108
Barrett Nucleus Rotator / Manipulator	101
Barrett Phaco-Axe and Horizontal Chopper	88,91

Barrett Phaco-Axe with Mushroom Rotator	90
Barrett Toric Axis Marker	150
Barrett-Cionni Toric Reference Marker	149
Bates Trephine Guide and Alcohol Chamber with Fixation	149
Beaupre Cilia Forceps	34
Bechert Nucleus Rotator	100
Bennett-Thornton LASIK Marker	152
Bloomberg Solid Blade Speculum, temporal	156
Bonn Curved Suturing Forceps, 0.12mm	51
Bonn Suturing Forceps, 0.10mm, Straight	51
Bonn Suturing Forceps, 0.12mm, Straight	51
Bonn Suturing Forceps, 0.3mm, Straight	55
Bordeianu Chopper, 1.75mm	83
Brazier Nucleus Rotator	102
Brown Intracapsular Manipulator	101
Brown Nucleus Cracker	48
Bulldog Clip	35,115
Buratto Adjustable Speculum, nasal	161
Buratto Adjustable Speculum, temporal	160
Buratto LASIK Oval Spatula	112
Bylsma ICL Manipulator	102

## C

Calladine-Inamura Flat Handle Capsulorhexis Forceps, Corneal Incision	26
Calladine-Inamura Flat Handle Capsulorhexis Forceps, Scleral Tunnel Incision	25
Calladine-Inamura Round Handle Capsulorhexis Forceps, Corneal Incision	26
Calladine-Inamura Round Handle Capsulorhexis Forceps, Scleral Tunnel Incision	25
Calladine-Inamura Short Flat Handle Capsulorhexis Forceps, Corneal Incision	26
Calladine-Inamura Short Flat Handle Capsulorhexis Forceps, Scleral Tunnel Incision	25
Calladine-Inamura Short Round Handle Capsulorhexis Forceps, Corneal Incision	26
Calladine-Inamura Short Round Handle Capsulorhexis Forceps, Scleral Tunnel Incision	25
Cannula Handle	124
Cannula Inserter - 23 Gauge	115
Cannula Inserter - 25 Gauge	115
Cannula Loading Forceps	50
Cannula Plug, 23 Gauge & 25 Gauge	126
Capsule Polishing Cannula	123
Capsule Scissors, Curved	13
Capsule Scissors, Curved 23 Gauge	13
Capsule Tension Ring Delivery System	119
Capsule Tension Ring Inserter (Bio Vision CTR)	119
Capsule Tension Ring Inserter (Ophtec CTR)	119
Castroviejo Corneal Scissors, Curved to Left	14
Castroviejo Corneal Scissors, Curved to Right	14
Castroviejo Miniature Corneal Scissors, Curved	13
Castroviejo Straight Suturing Forceps, 0.12mm	51
Castroviejo Suturing Forceps, 0.5mm	56
Castroviejo Style Cyclodialysis Spatula	94
Castroviejo Style Double Ended Synechia Spatula	94
Castroviejo Style Marking Caliper	141
CataPulse® Mini Pre-Chopper	48
Chan SMILE Dissecting Forceps	63
Chihara Curved Conjunctival Forceps	38,39

Chihara Straight Conjunctival Forceps	38
Cilia Forceps	34
Cionni Femto Spatula and Nucleus Divider	95
Cionni Speculum, nasal	159
Cionni Toric Axis Markers	149
Cionni Toric Reference Markers	149
Closed Blade Adjustable Paediatric, temporal	157
Closed Blade Adjustable Speculum, temporal	157
Colibri Notched Forceps, 0.25mm	37
Colibri Toothed Forceps, 0.12mm	36,52,53
Conjunctival Clamp	35,39
Curved Blade Micro Scissors Head, 23 Gauge	16
Curved Tying Forceps	59,60

## D

Daphna Vertical Chopper	90
Daya Descemet's Scraper	97
Daya Disruptor for CXL	115
Daya Lamellar Spear	106
Daya Textured Manipulator	98
Deitz ICL Loading Forceps	42
Deitz ICL Slider / Tucker	101
Delicate Serrated Forceps Head 23 Gauge	50
Delicate Sinskey Hook	96
Denman Brown Nucleus Cracker	49
Descemet's Membrane Punch - 1.2mm x 0.7mm	119
Descemet's Spatula	97
Desmarres Chalazion Forceps / Clamp	35
Desmarres Lid Retractor, size 0	108
DMEK 'S' Marker	146
DMEK Angled Descemet's Stripping Forceps	40
DMEK Descemet's Stripping Forceps	40
DMEK Forceps	41
Doi-Uematsu Intravitreal Injection Guide - Left Handed	140
Doi-Uematsu Intravitreal Injection Guide - Right Handed	140
Donoso Capsulorhexis Marker for Multifocal Intraocular Lens Implants	139
Double Ended Caliper, Marks 3.5mm and 4.1mm	141
Double Ended Caliper, Marks 3.5mm and 4mm	141
Double Ended Nucleus Chopper and Manipulator	86
Double Ended Nucleus Chopper and Rotator	88
Double Ended Nucleus Divider and Rotator	89
Double Ended Sinskey Hook	96
Double Ended Spatula	94
Double Ended Spatula / IOL Manipulator / Rotator	100
Double Ended Spatula, for repositioning epithelial flap	94
Double Fixation Colibri Forceps	40
Double Fixation Hook	106
Drysdale Rotator	103
Drysdale Rotator - Short	103



## E

Egi-Miyata Medium Eye Shield	110
Egi-Rabkin Large Eye Shield	110
Egi-Rabkin Medium Eye Shield	110
Egi-Rabkin Small Eye Shield	110
End Gripping Forceps Head 23 Gauge	50
Epithelial Disruptor for CXL	115
Epithelial Separator / Lifter	112
Epithelial Trephines	113

## F

Femto Flap Lifter and Retreatment Spatula	111
Femto Laser Spatula	111
Fenzl Hook	103
Fibre Optic Cannula, 23 Gauge	126
Findl Nucleus Chopper	138
Fine Fixation Ring with Caliper	138
Fine Thornton-Fixation Ring, 13mm	137, 138
Fine-Thornton Fixation Ring, 16mm	137
Fixation Plate	138
Fixation Ring	138
Four Blade Toric Reference Marker	149
Friedlander-Mendez Rotating Degree Gauge	143
Fujimoto CCC Guide Flat Handle - Ø5.3mm & Ø5.6mm	139
Fujimoto CCC Guide Round Handle - Ø5.3mm & Ø5.6mm	139

## G

Gills-Vannas Scissors, Angled	19
Gills-Welsh-Vannas Scissors, Angled	19
Giunchiglia Membrane Peeling Spatula, 23 Gauge	114
Green Nucleus Divider	85
Güell Descemet's Membrane Manipulation Forceps	41
Güell Descemet's Scraper	97
Güell Reverse Sinsky Hook, Flat Shaft	97
Gulani LASIK Marker	153

## H

Hanasaki Lid Retractor, 5mm	107
Hanasaki Lid Retractor, 7mm	107
Hara Nucleus Divider, curved	86
Hara Nucleus Divider, straight	86
Harms-Tubingen Curved Tying Forceps	60
Harms-Tubingen Straight Tying Forceps	61
Hirschman IOL Rotator	99
Horn Adjustable Femtosecond Laser Speculum	160

I/A Handpiece (45° angled tip), 16 Gauge	132
I/A Handpiece (90° angled tip), 16 Gauge	132
I/A Handpiece (curved shaft), 16 Gauge	131
I/A Handpiece (J-shaped tip), 16 Gauge	131
I/A Handpiece (straight shaft), 16 Gauge	131
I/A Handpiece with Irrigation Luer Lock	132
I/A Handpiece, Multi Thread	132
I/A Handpiece, Single Thread	132
Inamura Flat Handle Capsulorhexis Forceps, Corneal & Scleral Incision	29
Inamura Flat Handle Capsulorhexis Forceps, Serrated Cross Action Tips	31,32
Inamura Hydrodissection Cannula, 60° twin jet angle	123
Inamura Hyper-Hydrodissection Cannula, 22 Gauge	123
Inamura Multipurpose Cannula, 22 Gauge	123
Inamura Nucleus Divider / Manipulator	88,89
Inamura RACE Hook	89
Inamura Round Handle Capsulorhexis Forceps, 90° Tips, Corneal Incision	30
Inamura Round Handle Capsulorhexis Forceps, Corneal Incision	29,30
Inamura Round Handle Capsulorhexis Forceps, Serrated Cross Action Tips	31,32,33
Inamura-Nezu Hydrodissection Cannula with Outer Sleeve	123
Inamura-Talon Prechopper Forceps	47
Incision Gauge 1.0, 1.1 and 1.2mm	142
Incision Gauge 1.3, 1.4 and 1.5mm	142
Incision Gauge 1.6, 1.7 and 1.8mm	142
Incision Gauge 1.9, 2.0 and 2.1mm	142
Incision Gauge 2.2, 2.3 and 2.4mm	142
Incision Gauge 2.5, 2.6 and 2.7mm	143
Incision Gauge 2.8, 2.9 and 3.0mm	143
Incision Gauge Set	142
Infusion Cannula, 23 Gauge & 25 Gauge	127,128
Instrument Cannula, 23 Gauge	126
IOL Folding Forceps	42
IOL Gripping Forceps	43
IOL Loading Forceps	43,167
IOL Holding Forceps	42,167
IOL Insertion Forceps	43,168
IOL Manipulator	98
IOL Manipulator / Rotator	100
Iris Repositor	93
Iris Scissors, Curved	13,14,15
Iris Scissors, Straight	14
Irrigating Eye Shield	111
Irrigating Eye Shield with Luer Lock	111
Irrigation Handpiece, 21 Gauge & 23 Gauge	128,130

## J

Jakobsen-Barrett Nucleus Cutter and Rotator.....	89
Jameson Muscle Hook.....	107
Janjani Angled Manipulator.....	99
Jones-Inamura Flat Handle Capsulorhexis Forceps, Suitable For Scleral Tunnel Incision.....	28
Jones-Inamura Round Handle Capsulorhexis Forceps, Suitable For Scleral Tunnel Incision.....	28

## K

KAMRA™ Corneal Inlay Insertion Forceps.....	63
KAMRA™ Inlay Manipulator.....	103
Kearney Parabolic Marker.....	146
Kelman-McPherson Angled Tying Forceps, 10mm tip to angle.....	59
Kelman-McPherson Angled Tying Forceps, 5mm tip to angle.....	57
Kelman-McPherson Angled Tying Forceps, 7mm tip to angle.....	57,59
Kelman-McPherson Tying Forceps, 10.5mm tip to angle.....	58
Kelman-McPherson Tying Forceps, 12mm tip to angle.....	58
Khaw Descemet's Membrane Punch - 0.75mm x 0.5mm.....	119
Khaw Large & Small Conjunctival Clamp.....	35,39
Khaw Small Descemet's Membrane Punch - 0.5mm x 0.3mm.....	119
Khaw Standard Glaucoma Speculum, temporal.....	162
Khaw Transconjunctival Adjustable Suture Control Forceps.....	38
Knurled Luer Lock Fitting.....	124
Koch-Cionni Open Blade Adjustable Speculum, nasal.....	162
Koura Double Ended Scleral Depressor.....	105
Kozaki Dividing Hook.....	91
Kratz Barraquer Speculum, nasal.....	155
Kratz Barraquer Speculum, temporal.....	155
Krokchings Femto Incision Opening Spatula.....	95
Kudo Meibomian Gland Pressing Forceps.....	41
Kuglen Iris Hook and IOL Manipulator.....	97
Kurakazu Scleral Depressor 4/6mm.....	105
KY Cilia Forceps.....	34

## L

Lacrimal Dilator.....	109
Lacrimal Probe.....	109
Lane Implantable Miniature Telescope (IMT) Forceps.....	44
LASIK Cannula, 23 Gauge.....	124
LASIK Marker.....	153
Lens Loading Forcep.....	167,43
Lester IOL Manipulator.....	99
Lieberman Adjustable Speculum, temporal.....	160
Lowest Profile Blade Radial Marker, 16 blades.....	146
LRI Micrometer Diamond Knife, 1mm Lance, flat tip.....	80
Luer Lock Fitting.....	124

# M

Mackool Adjustable Speculum, temporal	163
Mackool Capsule Polisher	103
Mackool Capsule Retractor and IOL Guide	100
Mackool Cataract Support System	95
Mackool Double Ended Phaco Chopper and Spatula	91
Mackool Holder and Sterilising Case	95
Mackool Holder and Sterilising Case	178
Mackool Iris Retractor	95
Mackool Nucleus Rotator / Elevator	101
Mackool Open Blade Adjustable Speculum, temporal	158
Mackool Phaco Chopper	91
Mackool® Hydrodissection Cannula, 23 Gauge	123
Mackool-Barraquer Spatula	93
Mackool-Inamura Flat Handle Capsulorhexis Forceps with Blunt Tips	24
Mackool-Inamura Flat Handle Capsulorhexis Forceps with Pointed Tips	24
Mackool-Inamura Round Handle Capsulorhexis Forceps with Blunt Tips	24
Mackool-Inamura Round Handle Capsulorhexis Forceps with Pointed Tips	24
Mackool-Kuglen Hook and IOL Manipulator	98
Maloney Keratometer	115
Maumenee Corneal Forceps, 0.12mm	40
McPherson Toothed Forceps, 0.12mm	54
McPherson Tying Forceps, Straight	60
Membrane Peeling Spatula, 23 Gauge	114
Mendez Degree Gaug	143,144
Meyerhoefer Chalazion Curette, 1.5mm cup	104
Meyerhoefer Chalazion Curette, 1mm cup	104
Meyerhoefer Chalazion Curette, 2.5mm cup	104
Meyerhoefer Chalazion Curette, 2mm cup	104
Meyerhoefer Chalazion Curette, 3mm cup	104
Micrometer Diamond Knife, 1mm 35° Bifacet	78
Micrometer Diamond Knife, 1mm 45° Double Edge	77
Micrometer Diamond Knife, 1mm 45° Single Edge	77
Miyata Eye Shields - 11mm & 12mm	110
Miyata Laser Protection Forceps	62
Moorfields Utility Forceps	39,40
Morlet Lamellar Knife / Dissector	106

# N

Needle Holder / Scissors	70
Needle Holder, Curved	67,68,69,70
Needle Holder, Curved with lock	67,68,69
Needle Holder, Straight	67,68
Needle Holder, Straight with lock	67
Neo-natal Speculum, temporal	155
Neo-natal Strong Spring Speculum, temporal	155
NeoVize SMILE Forceps	62
Nishimura Depressor and Manipulator	105
Nishimura Fibre Optic Cannula, 23 Gauge	126
Nishimura Infusion Cannula, 23 Gauge	127
Nordan Needle Holder, Curved	68
Notched Forceps, 0.25mm Curved	45

Nucleus Cutter	86
Nucleus Cutter and Repositor	89
Nucleus Divider	85,86,92
Nucleus Divider / Rotator	85,87
Nucleus Divider Hook	91
Nucleus Removal Forceps	42
Nucleus Rotator	101,102

## O

Ogawa 23 Gauge Lens IOL Manipulator	99
Ogawa I/A Cannula, 18 Gauge	125
Ogawa Infusion Cannula, 20 Gauge & 23 Gauge	125
Ogawa Miniature IOL Manipulator	98
Ogawa Needle Holder, Curved	68
Ogawa Standard IOL Manipulator	98
Ogawa Straight Miniature IOL Manipulator	98
Ogawa Straight Suturing Forceps, 0.12mm	52
Open Blade Adjustable Speculum, temporal	158
Osher Conjunctival Forceps	38
Osher Haptic Cutter	15
Osher IOL Cutter, Angled	15
Osher IOL Cutter, Straight	15
Osher Iris Tuck Eliminator	96
Osher Universal Conjunctival Micro Scissors	13
Ota Fine Shaped Hook for the IOL Intrascleral Fixation Technique	99
Ota -Fujimoto 5.6mm CCC Marker with Centre Pointer	139
Ota L-Pocket Incision Marker	152
Ota Reference Marker for the IOL Intrascleral Fixation Technique	152
Ota Shaped Hook for the IOL Intrascleral Fixation Technique	99
Ota T Marker	152
Ota Y Marker for the IOL Intrascleral Fixation Technique	152
Otaka Cilia Forceps	34
Otaka Conjunctiva Forceps	38
Otaka Dilator	109
Otaka Lid Plate	109

## P

Packard 'Fat Boy' Nucleus Chopper and Capsule Retractor	84
Packard 'Fat Boy' Nucleus Cutter	84
Packard-Rosen LRI Degree Marker / Fixation, 12mm diameter	144
Packard-Rosen LRI Degree Marker / Fixation, 13mm diameter	144
Packard-Rosen LRI Degree Marker / Fixation, 14mm diameter	144
Packard-Rosen LRI Diamond Knife, 1mm Lance (600 micron preset blade depth)	80
Paddle Prechopper Forceps	48
Paddle Prechopper Forceps Angled 45°	47
Paediatric Muscle Hook	107
Pallikaris ICL Manipulator	101
Parmar Straight Vertical Chopper	84
Pearce Retractable Diamond Knife, 1mm 45° Double Edge	74
Phaco Wrench	123
Pierse Notched Colibri Forceps, 0.25mm	37,46
Pierse Notched Colibri Forceps, Dolphin Handle, 0.25mm	37,46

Pierson Notched Forceps, 0.25mm Straight	44,45
Pierson Notched Forceps, 0.3mm Straight	46
Pierson Notched Forceps, Dolphin Handle, 0.25mm	44,45
Plain Tip Forceps, Curved	49
Plain Tip Forceps, Straight	49
Protective Cleaning Cover For Interchangeable VR Instrument Heads	114

## R

R J Mackool™ Femtosecond Laser Speculum, temporal	160
R J Mackool™ Toric Axis Marker	150
Rabkin Blepharoplasty Tissue Forceps, 0.5mm	56
Rabkin Eye Shield	110
Rabkin Laser Blepharoplasty Plate	110
Rabkin Lid Retractor	108
Rana/Ota Nucleus Dividing Hook	92
Rassam Infusion Cannula, 20 Gauge	125
Reinstein Lenticule Separator	116
Retractable Diamond Knife, 1mm 30° Single Edge	74
Retractable Diamond Knife, 1mm 45° Double Edge	74
Retractable Diamond Knife, 1mm Lance	74
Retractable Diamond Knife, 1mm Trifacet	74
Retractable Diamond Knife, 1mm 45° Single Edge	74
Ring Markers	147,148
Rosen Nucleus Divider	84
Rossi Femto Hydrodissection Cannula	130

## S

Salvitti Akahoshi Micro Prechopper Forceps	47
Schocket Double Ended Scleral Depressor	105
Scleral Pin Holding Forceps	50
Scleral Pin, 20 gauge	123
Scott Femto Chop	83
Screw Thread Injector	169,170
Shepard IOL Forceps	41
Shepard Reversible Speculum	163
Short Handle Aspiration Handpiece, 23 Gauge	129
Short Handle Irrigation Handpiece, 23 Gauge	128
Sibillio Nucleus Chopper & Manipulator	87
Single Handed Injector with pre-load position	169
Sinsky Hook	96,97
Small Flushing Adaptor for Interchangeable VR Instrument Heads	114
Small Incision ICL Manipulating Forceps, Angled Flat Disc Tips	42
SMILE Double Ended Dissector	116
SMILE Double Ended Dissector with spoon tip	116
SMILE Double Ended Dissector with Taneri spoon tip	116
SMILE Lenticule Hook	116
SMILE Lenticule Removal Forceps, 23 Gauge	62
SMILE Short Dissector	116
Solid Blade Adjustable Paediatric Speculum	162
Spatula	93,94
Speculum, temporal	154,155
Squeeze Handle Asymmetrical Forceps 23 Gauge	49

Squeeze Handle Capsulorhexis Forceps	33
Squeeze Handle Curved Blade Micro Scissors - 23 Gauge	16
Squeeze Handle Delicate Serrated Forceps 23 Gauge	49
Squeeze Handle End Gripping Forceps 23 Gauge	49
Squeeze Handle for Vitreoretinal Instrument Heads	16,50,114
Squeeze Handle Straight Micro Scissors - 23 Gauge	15
Stein Utility / Flap Lifting Forceps	41
Step Instrument Cannula, 23 Gauge & 25 Gauge	126
Sterilising Case for Retinal Cannula	95
Sterilising Case for Retinal Cannula Plugs	178
Sterilising Tray and Insert For Retinal Cannula Sets	177
Sterilising Tray suitable for 10 instruments	175
Sterilising Tray suitable for 2 Diamond Knives	177
Sterilising Tray suitable for 20 instruments	175
Sterilising Tray suitable for 4 instruments	175
Sterilising Tray suitable for 40 instruments	176
Sterilising Tray suitable for 6 instruments	175
Stevens Femto Flap Lifter	112
Stevens Femto Rim Lifter	111
Straight Blunt Micro Scissors Head, 23 Gauge	16
Straight Micro Scissors Head, 23 Gauge	16
Straight Notched Round Handle Forceps, 0.65mm	46,57
Straight Suturing Forceps, 0.12mm	52
Straight Suturing Forceps, 0.3mm	55
Straight Toothed Forceps, 0.5mm	56
Straight Tying Forceps	61,62
Sugiura Central Divider	92
Sugiura Ciliary Sulcus Pad Injector	120

## T

Thin Blade Khaw Narrow Glaucoma Speculum, temporal	162
Thin Blade Khaw Standard Glaucoma Speculum	162
Thin Closed Blade Adjustable Speculum, temporal	157
Thin Open Blade Adjustable Speculum, temporal	158
Thornton 360° Parallax Free Arcuate Astigmatic Keratotomy	146
Thornton Comfort Speculum, temporal	155
Thornton Lowest Profile Parallax Free Blade Radial Maker, 12 blades	145
Thornton Lowest Profile Parallax Free Blade Radial Maker, 4 blades	145
Thornton Lowest Profile Parallax Free Blade Radial Maker, 8 blades	145
Thornton Micrometer Diamond Knife, 0.5mm Triple Edge Arcuate	79
Thornton Micrometer Diamond Knife, 1mm Triple Edge Arcuate	78
Thornton Triple Edge Micrometer Diamond Knife, 1mm Rectangular	77
Trephine Guide and Alcohol Chamber	113
Triple Edge Micrometer Diamond Knife, 0.8mm Rectangular	77
Troutman Angled Superior Rectus Forceps, 0.5mm	44,56
Tsukahara Scleral Depressor	104
Tsukahara Scleral Depressor with Slotted Sides	105

## U

Utrata Capsulorhexis Forceps, Curved Shafts	23
Utrata Capsulorhexis Forceps, Straight Shafts	23

## V

Vannas Scissors, Angled	18
Vannas Scissors, Curved	18
Vannas Scissors, Straight	18
Vitreotomy Cannula System 23 Gauge	171
Vitreotomy Cannula System 25 Gauge	171
Vitreotomy Instruments Sterilising Tray, suitable for 2 Instrument Heads	177
Vitreotomy Instruments Sterilising Tray, suitable for 4 Instrument Heads	177
VSL Ring Holding Adjustable Speculum, temporal	158

## W

Wada Nucleus Dividing Hook	92
Wallace LRI Diamond Knife, 1mm Lance	80
Wallace Mendez Degree Gauge	143
Westcott Style Stitch Scissors, Curved	17
Westcott Style Stitch Scissors, Straight	17
Westcott Style Tenotomy Scissors, Curved	13,17
Williams Adjustable LASIK Speculum, temporal	159

## Y

Yasuma Anterior Chamber Infusion Cannula	124
--	-----





A large white rectangular area with horizontal blue lines, resembling a sheet of lined paper for writing.

# Duckworth & Kent Exhibiting 2019

Crestpoint will be representing D&K at the following exhibitions:



AAO 2019 in San Francisco

ASCERS 2019 in San Diego

If you would like to meet a representative from the Crestpoint team at one of the following events then please contact us.

To see more information on both of these upcoming exhibitions including our booth number then follow us on social media or visit our events page at:

[www.duckworth-and-kent.com/events](http://www.duckworth-and-kent.com/events)

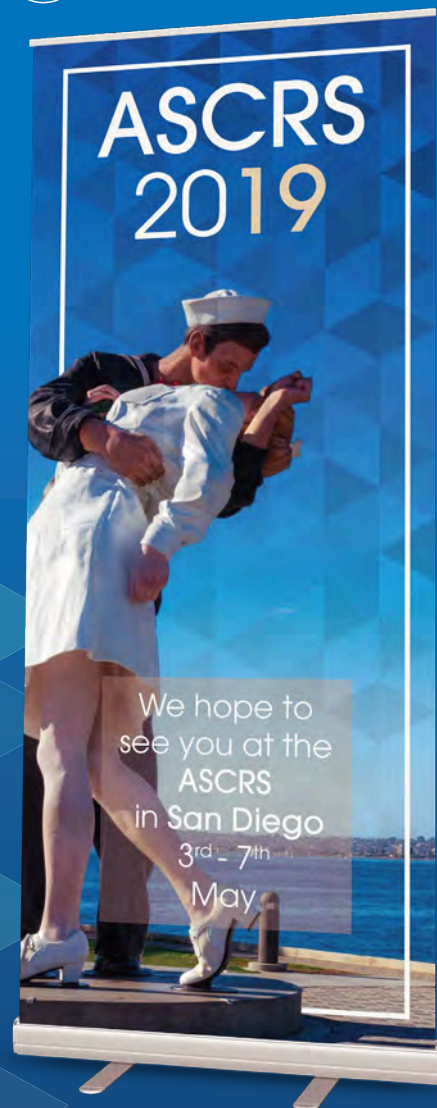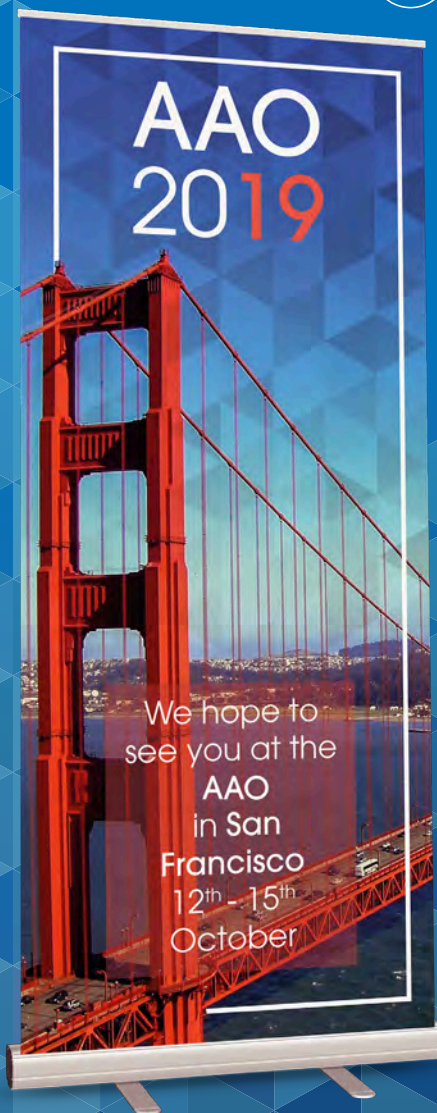

**Crestpoint**  
**OPHTHALMICS**  
...superior products...no boundaries...

[www.crestpointmgt.com](http://www.crestpointmgt.com)

9100 Watson Road

St. Louis, MO 63126-2241 USA

Tel: (314) 849-7773

Fax: (314) 849-7776

Email: [custsvc@crestpointmgt.com](mailto:custsvc@crestpointmgt.com)